
K-UI G1 carrier: actual-size fit sheet

ROUTED BOARD - physical fit and mounting still need your Dreamcast check.

Print this PDF on matching paper: Actual size / 100%; turn off Fit and Shrink.

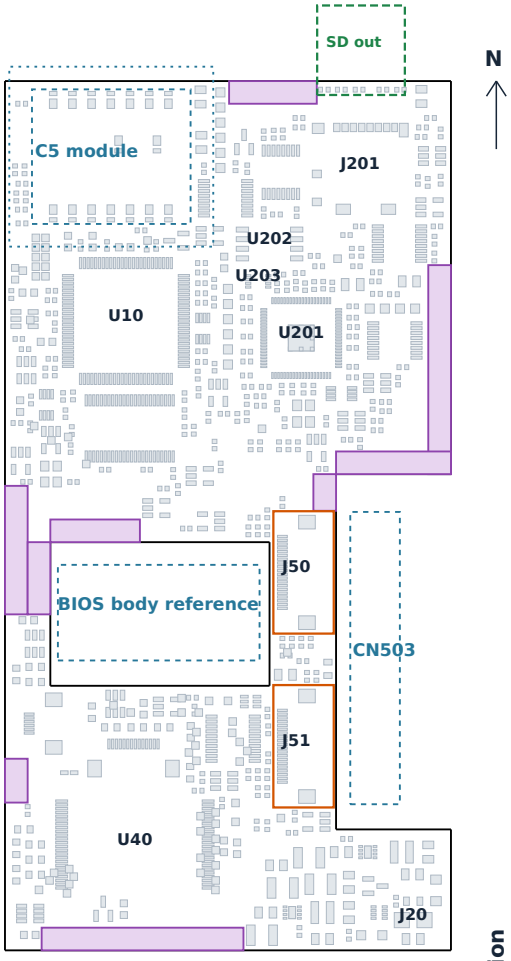

Fit check (OWNER-NEXT-STEPS item 3)

1. Measure BOTH 50 mm bars.
2. Centre IC501 in the opening; match CN503.
3. Edges: west >=1 mm from the thermal chip and its pad imprint; east >=0.5 mm inside the motherboard edge; north >=1 mm from AV.
4. Mark CE501/502/504 and every part >2 mm tall under solid laminate.
5. Trace the 6 mm / 8 mm shield boundary.
6. Mark case posts; note heights in purple.
7. Green box: microSD pull-out needs 10 mm clear past the edge, nothing over 3.3 mm.

Paper geometry is exact; registration is draft.
Black: native carrier edge and openings.
Gray: actual carrier component pads.
Blue dashed: provisional existing hardware; dotted: C5 plus 3 mm clamp envelope.
Orange: J50/J51 flex sockets (2.2 mm tall).
Purple: 3 mm edge bands free for supports.

Carrier: 59 x 115 mm; PCB 0.8 mm.
Nominal underside: motherboard +2.5 mm.
Nominal top: motherboard +3.3 mm.
6 mm zone: connector stack up to 5.6 mm.
Only 0.4 mm before other tolerances.
8 mm zone: C5 plus clamp <=3.7 mm above seating plane at max PCB thickness.
Tall existing capacitors need clear openings.
Paper fit does not establish stack height.

C5 contacts need a supported 0.90 mm gap and at least 6.24 N total clamp reaction.
Support and clamp are not yet qualified.

If either bar is wrong, the printer scaled the page. Do not resize board geometry.

No shield cutting is assumed. This sheet is not a fabrication release.

PCB SHA-256: 6b809188278f43a0f7a8c776976dc72cf207901cd439310714d7bc09ce60fe6a