Technical Session 1:
The firefighter drone - Part 2: Safety

Thierry Lecomte , Pedro Ribeiro

ROBOSTAR

robostar.cs.york.ac.uk

11th March 2025

Royal Academy of Engineering

Engineering and Physical Sciences Research Council

Agenda

- Safety issues
- Hazard analysis
- Safety function

Safety Issues

Safety is about things that happen 1 in 1,000,000

ROBOSTAR

University of York, UK

Failing Software-Based Systems

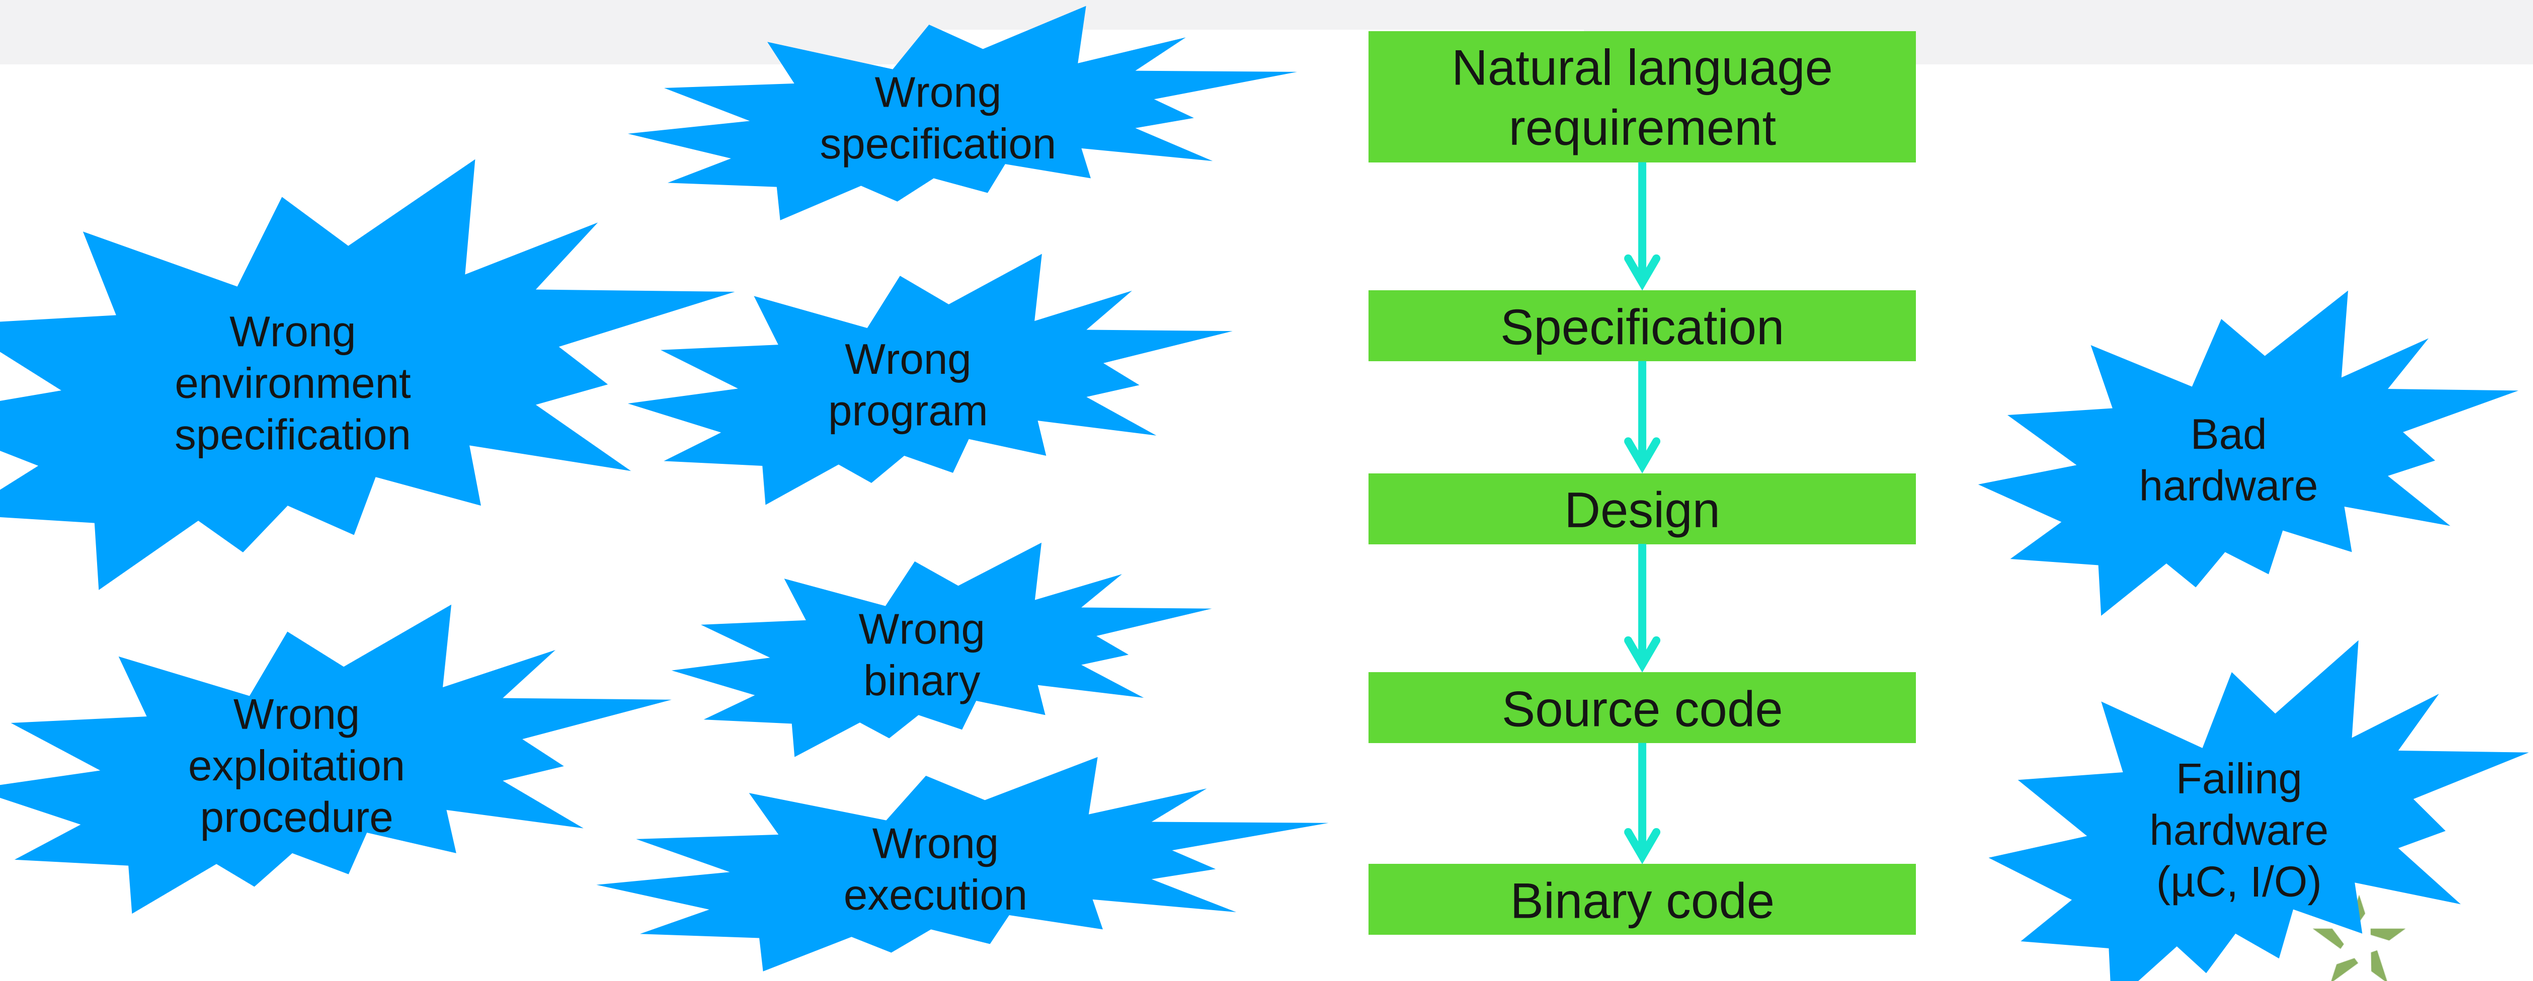

ROBOSTAR

Safety for Unmanned « flying things »

SAFETY INTEGRITY LEVELS
DESIGN ASSURANCE LEVELS

DAL B/SIL3 : 10^{-7}/h
DAL A/SIL4 : 10^{-9}/h

CATASTROPHIC FAILURES

CERTIFICATION

NL safety demonstration
Convince responsible human expert
Formal methods **in dev cycle**

SYSTEMATIC FAILURES

Specification
Design
Implementation
Environment
Exploitation

STRONG / ONGOING STANDARDS

General aviation standards:
DO-178C (SW), DO-254 (HW), ARP4761 (Safety)

Unmanned Aircraft Systems:
ASTM F3266-20 (Design)
ASTM F3178-16 (Loss of control)
Specific Operations Risk Assessment
European Union Aviation Safety Agency
DO-326A (Cybersecurity)

RANDOM FAILURES

Execution machine
Entropic hardware

ROBOSTAR

Formal Methods to Handle Failing Systems

RoboSim
for system level modelling

B
for C&C non-threaded safety software

Wrong specification

Wrong environment specification

Wrong program

Wrong exploitation procedure

Wrong binary

Wrong execution

CLEARSY SAFETY PLATFORM

Natural language requirement

Specification

Design

Source code

Binary code

Bad hardware

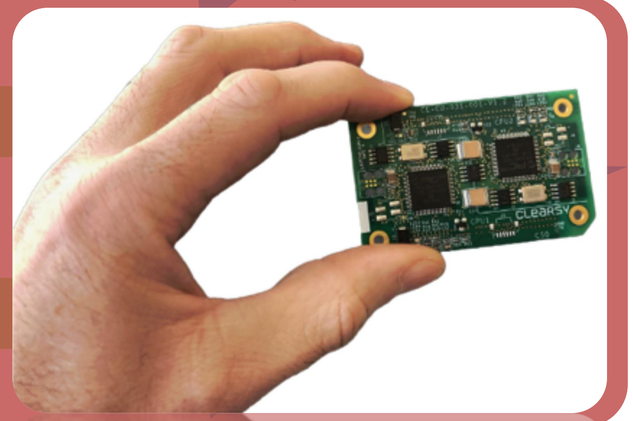

ROBOSTAR

Hazard Analysis

Preliminary Study

- Dreaded events (what situation do we want to avoid ?)
  - **[1] Firefighting erratic flight**
    - Hypothesis: behaviour is supposed « correct »
    - Adding functional redudancy (duplicate computer, software, and sensors) against the lightweight / lowcost design principles
  - **[2] Collision with environment or human being**
    - Hypothesis: Lightweight drone -> probably no incidence
  - **[3] Loss of the drone**
    - Requires safeguard to avoid drone to get out of reach /lost

ROBOSTAR

Preliminary Study

- Dreaded events (what situation do we want to avoid ?)
  - **[1] Firefighting erratic flight**
    - Hypothesis: behaviour is supposed « correct »
    - Adding functional redudancy (duplicate computer, software, and sensors) against the lightweight / lowcost design principles
  - **[2] Collision with environment or human being**
    - Hypothesis: Lightweight drone -> probably no incidence
  - **[3] Loss of the drone**
    - Requires safeguard to avoid drone to get out of reach /lost

ROBOSTAR

Hazard	Accidental event	Probable cause	Preventive actions
Loss of communication	Inability to control drone (mission interrupt)	ECM, fuzzing, emitter down, receiver down, obstacle, signal attenuation	If no signal is received during a given period, flight software is triggered to “return to base”
Invalid communication	Mission maintained with no valid remote control	Wrongly received signal from another source	Messages contains some **liveness** and dynamic information to discriminate from “random sources”
Low energy	Inability to maintain communication link, inability to ensure flight	Battery low, leak current	External device measures remaining charge and trigger alarm if half charge + constant is reached. Also takes into account the loss of charge over time.
Insufficient propulsion power	Inability to maintain flight profile, collision with ground objects/human beings	Environmental conditions (wind), interaction with environment (cables), engine failure	Out of scope
Inaccurate flight computer	Unpredictable trajectory, collision with objects/human beings	ECM, shots, failing hardware	Out of scope
Safety function not active	Inability to control drone (mission interrupt)	No energy on the safety computer, failing safety computer	Safe position should correspond to “safety computer powered and running OK”

ROBOSTAR

Safety Function

Safety Check

- **Verifying that a communication link is maintained during the whole mission**. This communication link, from ground base to drone only, is used to interrupt the mission if decided remotely by human supervisors and/or if some on-board conditions are not met. Recovering the communication link re-enables the mission.
- **Checking that the battery has sufficient charge**. Insufficient charge implies to recharge the battery of the drone that is the only way to cancel the “low battery” alarm.
- If the safety-check fails, the flight software is contained in a mode where a return-to-base is mandatory.
- **Need to know when the mission starts** (Start of Mission, or ***SoM***)
- **Operational exported constraint**: drone cannot be operated from a moving base

ROBOSTAR

Safety Check

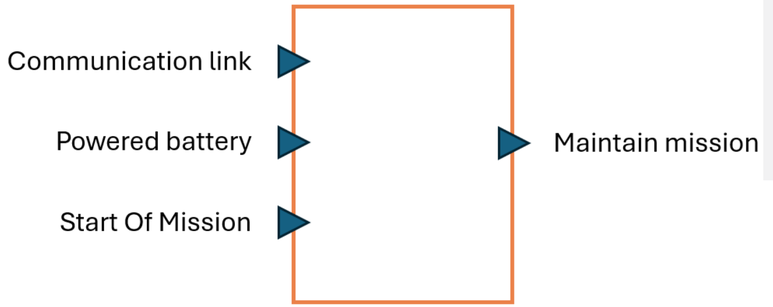

It takes three inputs:

- **Communication link** represents the transformation of analogic radio signal into digital signal (bit stream). The frequency of the signal and bit alternation is constant. The transmission pattern must be determined. When communication link is down, the mission is not maintained until either the communication link is reestablished, or the drone reaches base and is reset/restarted.

- **Powered battery** represents the capability of the drone to return to its base, as it is supposed to start its mission with full charge. The data required for the low battery alarm is usually complex (real value fluctuating over time). For this case study, the Boolean input signal represents the fact that the output voltage is greater than a threshold. If it is lower than this threshold during a delay $delay_1$ then the low battery alarm is raised. Once a low battery alarm is raised, the return-to-base is forced until the drone returns to base and is reset/reenergized/restarted

- **Start of Mission** represents the first moment when the safety check must be ensured. This event is characterized by the first rising edge of this input.

and calculates one output:

- **Maintain mission** represents the ability to continue the mission.

ROBOSTAR

Inputs, Outputs, and Safe Position

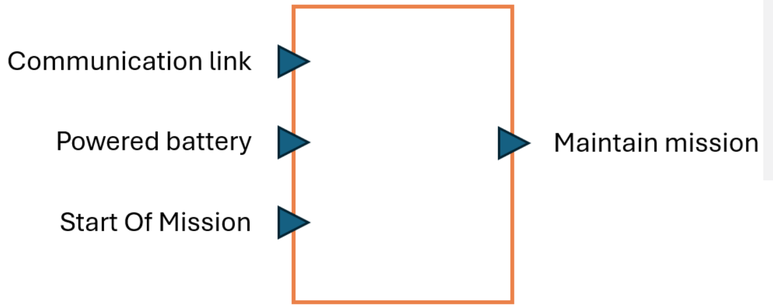

- Restrictive position (“return to base”) should correspond to “absence of power”
  - *Maintain mission* should be powered to maintain the mission
  - *Powered battery* indicates enough energy when powered
  - *Start Of Mission* requires some energy to start the mission
  - *Communication Link* not energized indicates no communication activity

When you observe a system
you don’t know if everything works OK or not

ROBOSTAR

An example of scenario

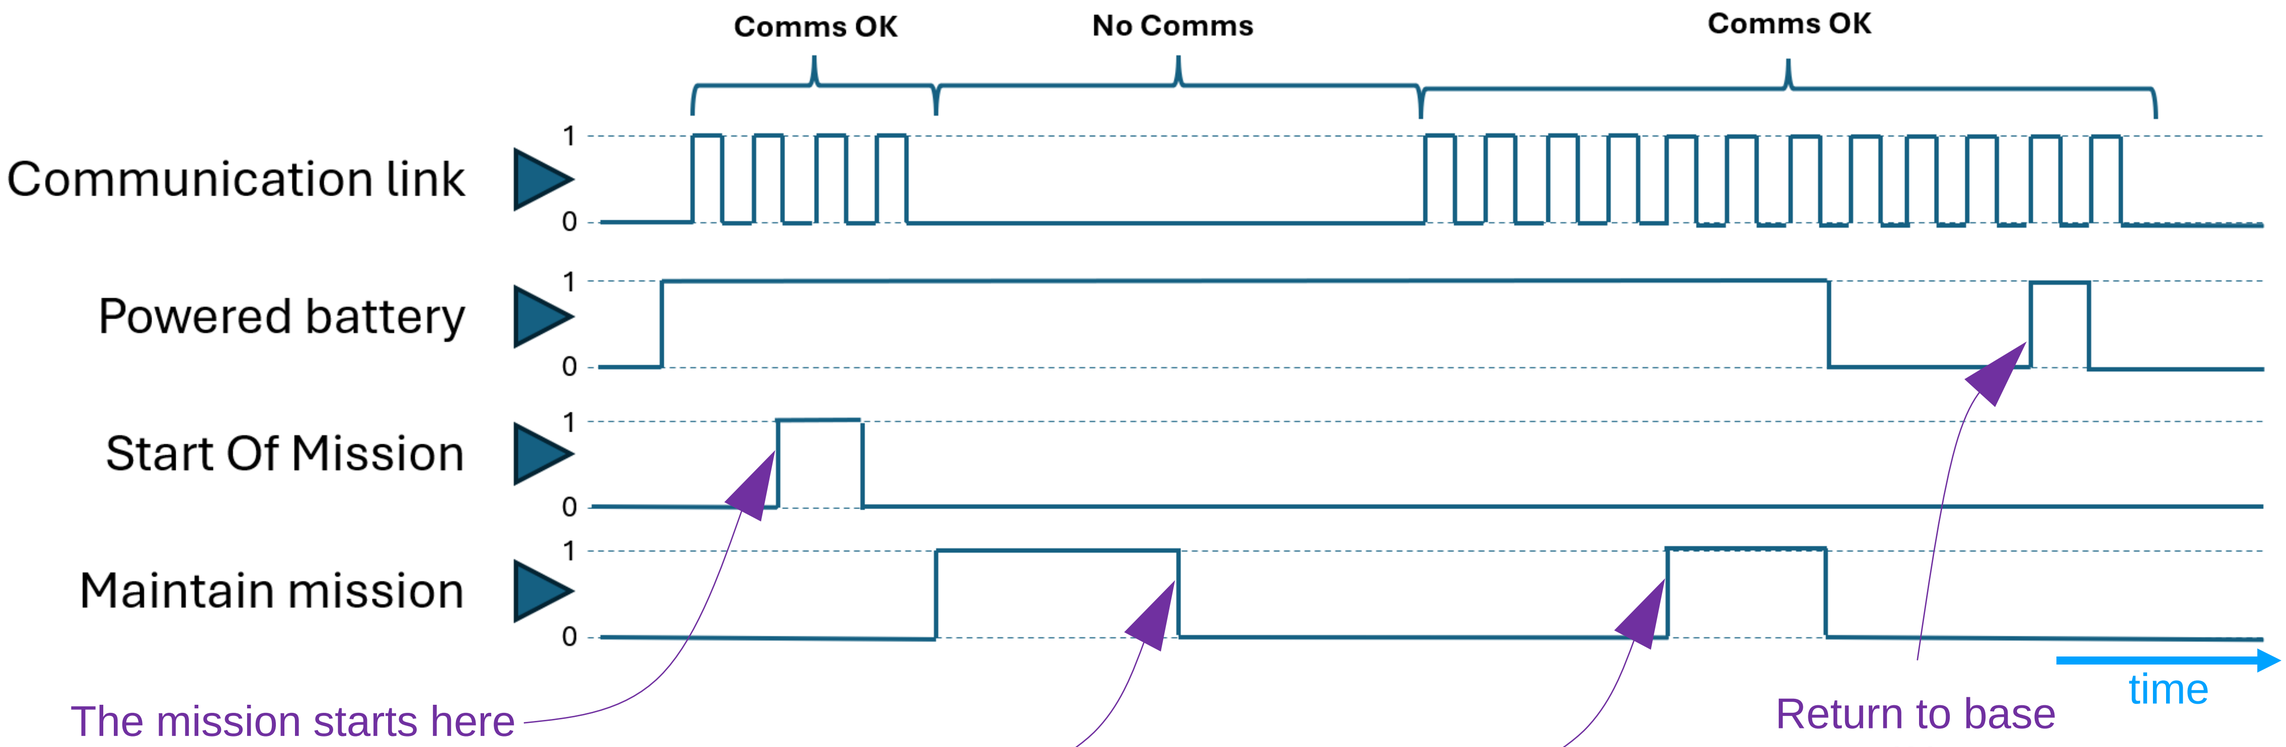

ROBOSTAR

Next

The RoboSim model

Anna Cavalcanti, Pedro Ribeiro