

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

TIM3 Mode and Configuration

Mode

Slave Mode Disable

Trigger Source Disable

☒ Internal Clock

Channel1 Disable

Channel2 Disable

Channel3 Disable

Channel4 Disable

Combined Channels Disable

☐ XOR activation

☐ One Pulse Mode

Configuration


Reset Configuration

☒ Parameter Settings ☐ User Constants ☒ NVIC Settings ☐ DMA Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

Pinout view

System view

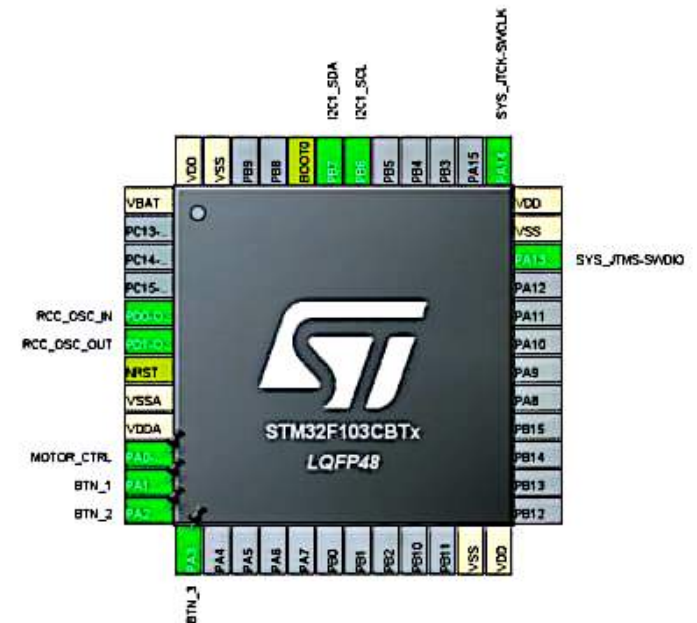

Mode

Slave Mode Disable 

Trigger Source Disable 

☒ Internal Clock

Channel1 Disable 

Channel2 Disable 

Channel3 Disable 

Channel4 Disable 

Combined Channels Disable 

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

 Parameter Settings

 User Constants

 NVIC Settings

 DMA Settings

Configure the below parameters :



Counter Settings

Prescaler (PSC - 16 bits value) 7199

Counter Mode Up

Counter Period (AutoReload Register - 4999

Internal Clock Division (CKD) No Division

auto-reload preload Disable

Trigger Output (TRGO) Parameters

I2C1 Mode and Configuration

Mode

I2C I2C



Configuration

Reset Configuration

✓ NVIC Settings

✓ DMA Settings

✓ GPIO Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Search (Ctrl+F)



✓ Master Features

I2C Speed Mode

Standard Mode

I2C Clock Speed (Hz)

100000

✓ Slave Features

Clock No Stretch Mode

Disabled

Primary Address Length selection

7-bit

Dual Address Acknowledged

Disabled

Resolve Clock Issues

