

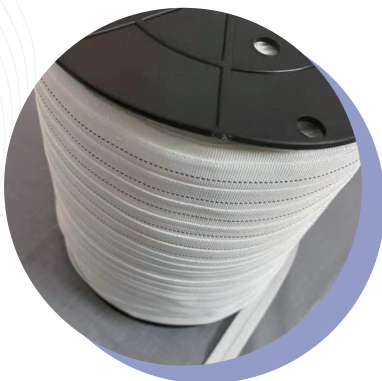


# TEXTILE LAUNDRY ACCESSORIES MANUFACTURER

- We believe in being a flexible, customer-driven partner;
- We believe in delivering value through innovation;
- We believe everything starts and ends, with quality;
- We believe in becoming an extension of our customer's teams;
- We believe that no matter the size of the project, it deserves the very best;
- We believe in an open and honest relationship;
- We do not believe in shortcuts.
- If you prioritize our company core value as above, then we're the team for you.

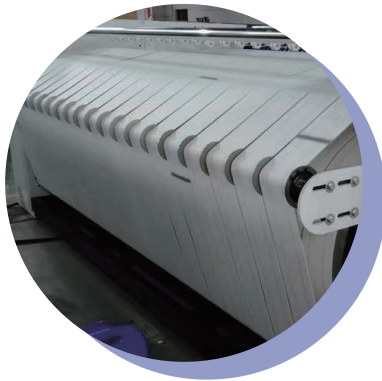

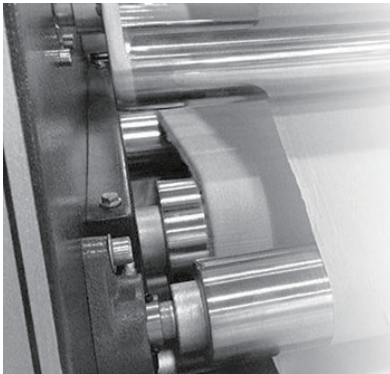

Amisfelting factory was established in 2001. In 2011, another factory was established.

At present, there are 30 people in the factory. The production equipment includes 6 winding machines, 1 setting machine, 1 carding machine, and 7 needle machines. 4 sets of setting machines.

In the early stage of the factory, the company mainly supplied printing, pre-shrinking, pleating, calendering machinery manufacturers, users, industrial laundry rooms, and laundry machinery manufacturers in China.

With the expansion of the market and personnel equipment, the factory also started to set up its own foreign trade company. Started development and hope to better serve machinery manufacturers.

We believe that first-class quality is the prerequisite for long-term cooperation. Business is mutually beneficial and win-win. We will bring you better service and quality and become your best supplier.

**PRODUCT  
RANGE**

**Laundry  
Accessories**

**Textile  
felt**

**Conveyor  
belt  
fastener**

**Fastener  
Tool**


**Other  
felt belt**

# LAUNDRY IRONER FELT (PADS)

Can be use for below machines: GIRBRU, LACO, BRAUN, JENSEN, Lapauw, Kannegiser, Bmm Weston, ramson, Stefan.

## Specification

|                     |                                    |
|---------------------|------------------------------------|
| <b>Material</b>     | 100%Nomex, 50%Nomex, 100%Polyester |
| <b>Working temp</b> | up to 230, up to 180, up to 150    |
| <b>Width</b>        | 3.3m, 3.5m, 3.8m, customized       |
| <b>Length</b>       | 5.6m, 7.6m, customized             |
| <b>Thickness</b>    | 2mm, 3mm, 5mm                      |




# LAUNDRY IRONER BELTS

Offer a variety of drying ironer belts (also called Heated Cylinder Belts, ironer Ribbon) for all flatwork ironers: (Electrolux, Girbau, Primus, Alliance (Ipsos), Chicago, sealion ...)

## Specification

|                     |                                            |
|---------------------|--------------------------------------------|
| <b>Material</b>     | 100%Nomex, 50%Nomex, 100%Polyester, Canvas |
| <b>Working temp</b> | up to 230, up to 180, up to 150, up to 150 |
| <b>Width</b>        | 100mm, 150mm, 200mm, 205mm                 |
| <b>Length</b>       | customized, can be in roll or with clipper |
| <b>Thickness</b>    | 2mm, 3mm, 5mm                              |

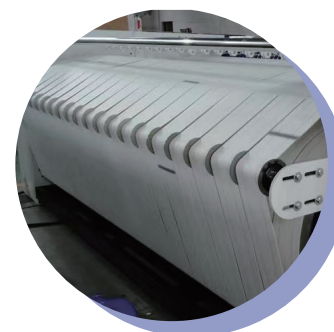

# GUIDE TAPE



## Specification

|                     |                                         |
|---------------------|-----------------------------------------|
| <b>Material</b>     | 100%Nomex, 100%Polyester,PPS            |
| <b>Working temp</b> | less than 230, less than 150, up to 230 |
| <b>Width</b>        | 12mm, 15mm                              |
| <b>Length</b>       | 100m,400m                               |


# FOLDING MACHINE BELT

Folder Belt are made from a Polyester/Cotton blend and are suitable for all classifications.

Belting has been specifically designed for feeders and can be supplied in roll form along with clips and pins or can be made up and ready to use

## Specification

|                 |                                         |
|-----------------|-----------------------------------------|
| <b>Material</b> | 100% Cotton, cotton+polyester           |
| <b>Width</b>    | 50mm, 75mm, customized                  |
| <b>Length</b>   | 100m, customized with clipper(fastener) |

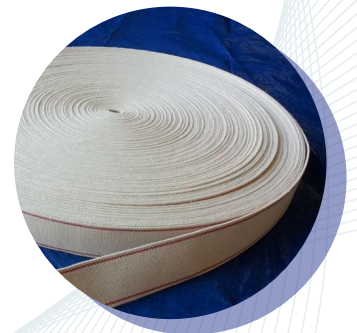



# IRONER WAX

## Specification


|                     |                      |
|---------------------|----------------------|
| <b>Type</b>         | Power Wax, Flake Wax |
| <b>Working temp</b> | below 150, over 200  |
| <b>Package</b>      | 25pound/bucket       |



# SPRING PADDING

## Specification


|               |                 |
|---------------|-----------------|
| <b>Brand</b>  | SPRINGPRESS     |
| <b>Type</b>   | SZ11            |
| <b>Length</b> | 1300m,500m,560m |

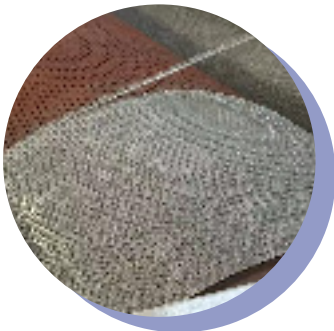

# METAL HOSE

## Specification

|                      |                 |
|----------------------|-----------------|
| <b>Materia</b>       | Stainless Steel |
| <b>Type of joint</b> | Flat            |
| <b>Nut</b>           | 1/2",3/4",2"    |
| <b>Length</b>        | 1m,1.2m,1.5m    |

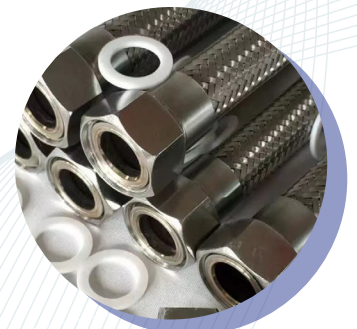

# DRY CLEAN PADS/COVER

We supply various kinds of ironing padding and dry cleaning padding for your dry cleaning press machines.


Our dry cleaning padding has very long life-span with excellent steam penetration.

From cover cloths to inside padding materials.

we offer various choices.

**The popular items is:** 41".42".45".47",52" and so on.

**And these padding can be used on:** Hoffman. Forenta. Pony, Sidi Gidini. Cissel. Sailstar

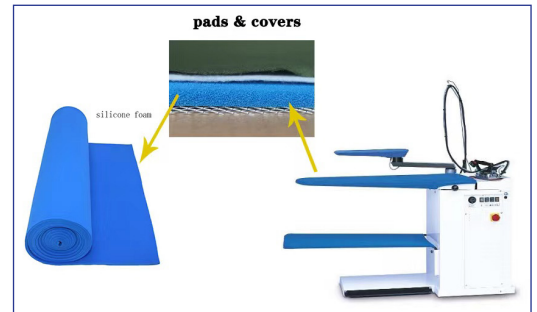

# ROTARY STEAM PRESS NOMEX COVER FABRIC 20# .

## Specification


|                     |                     |
|---------------------|---------------------|
| <b>Material</b>     | 100% aramid         |
| <b>Width</b>        | 1.6m                |
| <b>Length</b>       | 50m                 |
| <b>Density</b>      | 130g/m <sup>2</sup> |
| <b>Working temp</b> | over 200 degrees    |




# RUBBER BELT

## Specification

|                 |                           |
|-----------------|---------------------------|
| <b>Material</b> | Rubber                    |
| <b>Usage</b>    | Laundry machine anti-skid |
| <b>Size</b>     | 50mm width, 100m length   |

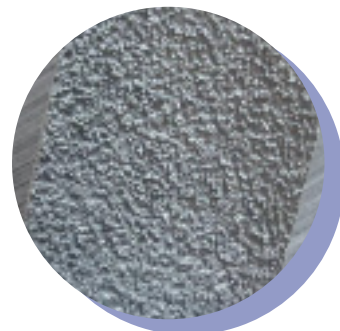

# POLYESTER SPIRAL MESH BELT

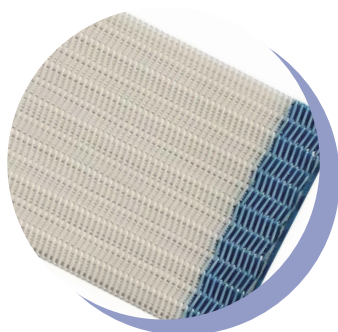

## Specification


|                 |                             |
|-----------------|-----------------------------|
| <b>Material</b> | polyester                   |
| <b>Size</b>     | 4900mm length, 1080mm width |

# WAX CLOTH

Our wax cloth is highest quality in the industry, we use the best materials available to bring you a durable and long-lasting product


## Specification

|                             |                |
|-----------------------------|----------------|
| <b>Size</b>                 | 72", 120" 130" |
| <b>Wax pocket</b>           | 18", 18", 18"  |
| <b>Mesh abrasive</b>        | 11", 11", 11"  |
| <b>Flannel flap on tail</b> | 19", 19" 19"   |

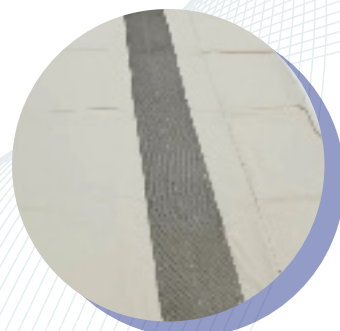

# CLEANING CLOTH

Our cleaning cloth is highest quality in the industry, we use the best materials available to bring you a durable and long-lasting product.

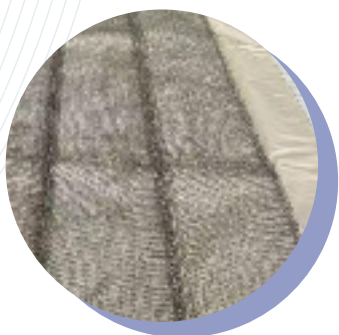

## Specification


|                        |            |
|------------------------|------------|
| Size                   | 65", 72"   |
| Mesh abrasive          | 30", 30"   |
| Padding strips on tail | 2.5", 2.5" |

# LAUNDRY BELT CLIPPER

Wire Hook Fastening System is designed with a variety of different wire diameters, leg and point lengths, metals, strip lengths, and styles to meet your individual application needs. which is the same usage as Flexco

## Specification

|          |                           |
|----------|---------------------------|
| Material | stainless steel           |
| Length   | 50mm, 100mm, 150mm, 200mm |

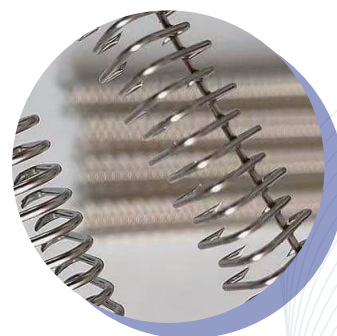

# STAINLESS STEEL WIRE PIN



## Specification

|                        |            |
|------------------------|------------|
| Size                   | 65", 72"   |
| Mesh abrasive          | 30", 30"   |
| Padding strips on tail | 2.5", 2.5" |



# HEAT TRANSFER PRINTING FELT



## Specification

|                     |                                                  |
|---------------------|--------------------------------------------------|
| <b>Material</b>     | aramid                                           |
| <b>Working temp</b> | 200 °C - -260 °C                                 |
| <b>density</b>      | 2800 g / m <sup>2</sup> -3600 g / m <sup>2</sup> |
| <b>thickness</b>    | 7mm-10mm                                         |
| <b>width</b>        | 600mm-3500mm                                     |

## Characteristics:

mall deformation, not deviation, structure close do  
not shed hair, blanket surface smooth smooth and  
elastic high.

## Use:

uitable for hot transfer printing machine process-  
ing fabrics, decorative cloth, curtains, leather,  
ribbon, clothing, advertising cloth and other cloth  
printing

## Use Brand:

Klieverik, Monti, Transmatic, Lemaire, Practix, Sorim, Studio FX, Stork, Bates, Wuppertal, Kristall, Sublistatic,  
Gessner, Bizmak, S.T.M., Singer, KMT, MOGK, TURAL MAKINA...


HIGH  
QUALITY

# SANFORIZING FELT

The purpose of a sanforizing machine or a shrinking machine is to pre-shrink, stabilize cotton fabrics and mixed cotton fabrics such as Denim.

## Specification

|                   |                                        |
|-------------------|----------------------------------------|
| <b>Material</b>   | Aramid, Polyester, Acrylic             |
| <b>Thickness:</b> | 7-10mm                                 |
| <b>Size:</b>      | customized according to machine demand |

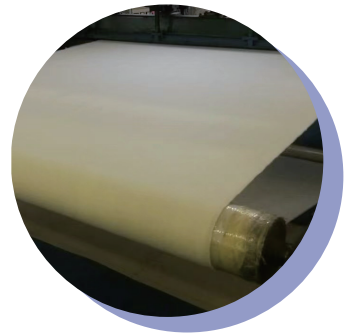


# FABRIC PLEATING MACHINE NOMEX ENDLESS FELT

100% Nomex Endless Fabric Pleating Machine Felt or said Endless Pleating Felts like a tube, so will call pleating tube felts are used for pleating machines for the fabric pleating

## Specification

|                      |                            |
|----------------------|----------------------------|
| <b>Material</b>      | Aramid, Canvas             |
| <b>Circumference</b> | 520-580mm                  |
| <b>Length</b>        | 1800mm, 2000mm, customized |
| <b>Thickness</b>     | 3-6mm                      |

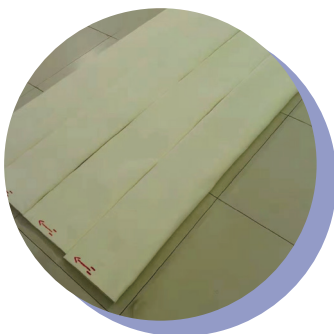

# COMPACTOR MACHINE FELT

Compacting machine is generally equipped with two steam chambers and two felt units.

It pre-shrinks and stabilizes the T-shirts or polos in order to avoid too much shrinkage after washing.

The compacting unit consists of 2 felt compacting units, each of them consisting of a Nomex felt approx. 20 mm thick, a steam-heated chrome-plated center roller of dia. 400 mm, rubber covered roller driven by variable frequency drive, a compacting pressure roller, a felt tensioning roller and a felt centering roller. Each unit is provided with a special anti-friction sheet type shoe controlled by an electrical actuator to control the compressive shrinkage. A fabric cooling roller is provided after a second felt to cool the fabric by means of chilled water circulation. Fabric Tension through the machine is controlled with the help of sensitive load cells and variable frequency drive with PLC and touch screen.



## Specification

|                  |                                                           |
|------------------|-----------------------------------------------------------|
| <b>Material</b>  | Nomex, Polyester                                          |
| <b>Thickness</b> | 16mm ~ 22mm                                               |
| <b>Size</b>      | 2750mm circumference,<br>1480mm width, 20mm T. customized |

HIGH  
QUALITY

# LIGHT-DUTY BELT FASTENER TYPES

**also called** Lightweight conveyor belt fasteners, Clipper lace


Clipper lace is the most commonly used lightweight conveyor belt fastener system for connecting conveyor belt lacing ends together.

## Typical industries for wire fasteners include:

- 1)Package and parts handling
- 2)General manufacturing
- 3)Commercial laundry
- 4)Food processing
- 5)Agriculture
- 6)Filter media



**The fastener standard package is 300mm in length, 12 pieces in a box**  
( can customize 150mm,200mm,600mm,900mm,1200mm)

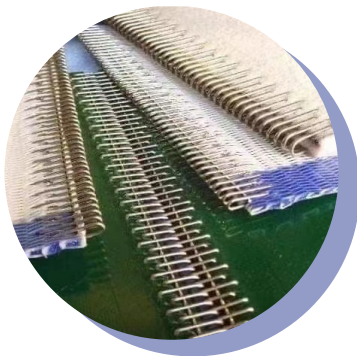

- 1# Fastener used for thickness 1mm-3mm
- 2# Fastener used for thickness 2.8mm-4mm
- 3# Fastener used for thickness 4mm-4.8mm
- 4# Fastener used for thickness 4.8mm-5.6mm
- 5# Fastener used for thickness 6.4mm-7mm
- 6# Fastener used for thickness 7mm-8mm

**Note:** Pins (wires) are not equipped by default, you need to buy them separately.



# ALLIGATOR STAPLE FASTENING SYSTEM

## Product use:

Used for light conveyor belt connection. It is suitable for working occasions with cleanliness, corrosion resistance, or anti-magnetization requirements such as food, electronics, and light industry.

## Product features food-grade stainless steel products:

no pollution to conveying materials.

## Sheet forming:

The joint is low and flat, which reduces the obstacles when the conveyor belt is running.

## Short buckle body:

meet the requirements of small rollers of light conveyors

## Specifications and dimensions:

|                               |                        |
|-------------------------------|------------------------|
| <b>1# Buckle length 1200</b>  | 8pcs/box with 2MM-3MM  |
| <b>7# Buckle length 1200</b>  | 8pcs/box with 3MM-5MM  |
| <b>15# Buckle length 1200</b> | 4pcs/box hit 4MM-5.5MM |

## Precautions:

The specification of the bound conveyor belt must meet the technical support of the buckle;

No need for complicated installation tools, just use a hammer to complete the conveyor belt link;

Ensure that the buckle body and buckle teeth of the connecting buckle are tightly connected with the belt

