

Catalog of innovative,
high-quality,
tailored products.



QuickLay
ACRYLIC MAT



PRODUCT CATALOG


2025

Advanced Prefabricated Court Surface
Smart.
Durable.
Fast to Install.

Why Choose QuickLay?

QuickLay Acrylic Mat is engineered for the demands of modern pickleball and tennis courts. Built for performance, durability, and speed of installation.


- Designed for Pickleball & Tennis Courts
- High rebound rate: 90–100%
- Anti-slip surface: Dry 95 / Wet 81
- UV-resistant & long-lasting color
- Self-cleaning & low maintenance
- No adhesives required
- Indoor & Outdoor Use

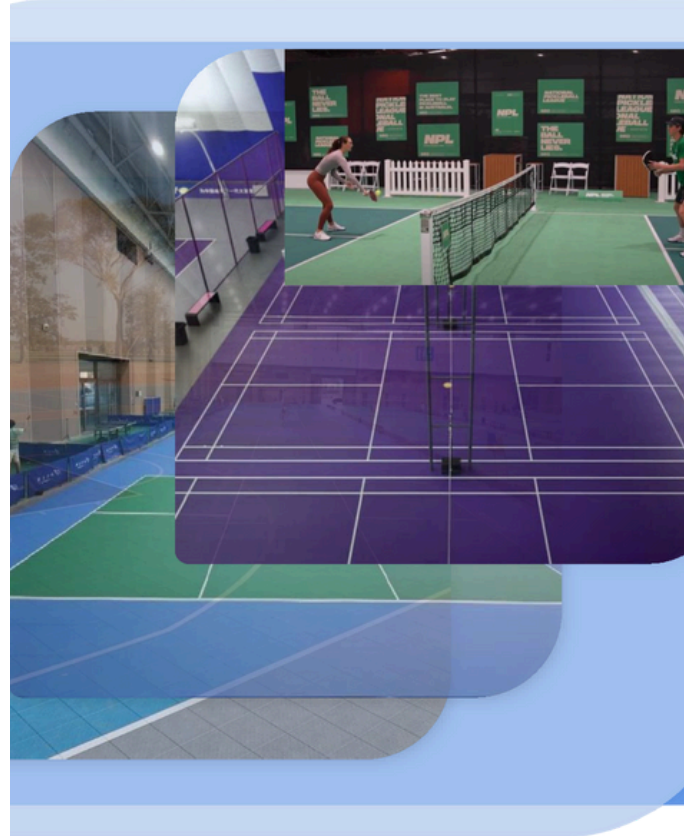


Technical Specs

QuickLay Technical Details

- Size per Roll: 1.8m x 18m
- Thickness: 3.0mm
- Weight: 5.5+ kg/m²
- Layers:
- Modified acrylic surface with sand texture
- Wear-resistant outdoor layer
- Double-layer polyester fiber mesh
- High-density anti-displacement base
- Surface Treatment: Modified Arcylic

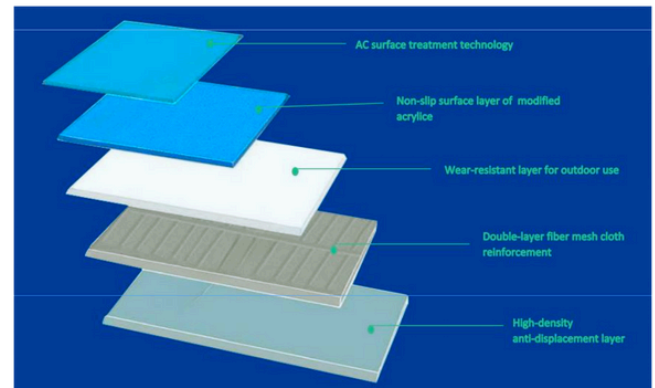

Focus on sports indoor & outdoor sports flooring production supplying

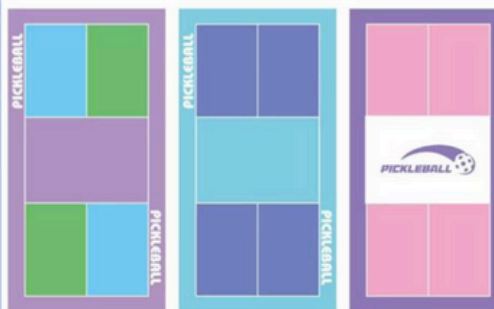



Good at customized size, logos, patterns and colors



CE, ITF, BWF, ROHS certificates approved.

The Advantages of Our Products

- **One-Piece Coloring:** Seamless design for better durability and aesthetics.
- **Indoor & Outdoor Ready:** Stable color with no fading or oil bleeding.
- **Eco-Friendly Surface:** Non-toxic, odorless AC treatment.
- **Pro-Level Grip:** High-density wear layer with excellent wet/dry anti-slip.
- **Rebound Support:** Base layer boosts ball response and court speed.
- **Speed Control:** Adjustable sand texture for athlete-specific performance.
- **Smart Color Match:** Thousands of Pantone, RAL, and custom options.
- **Fast Delivery:** Prefabricated for quick installation and low downtime.

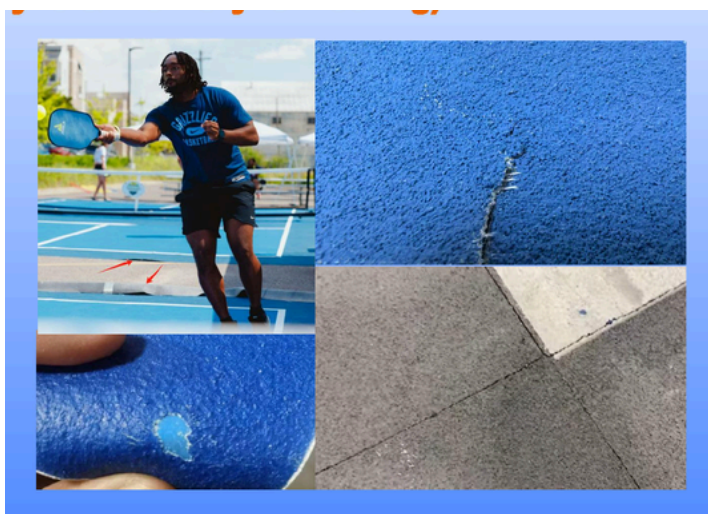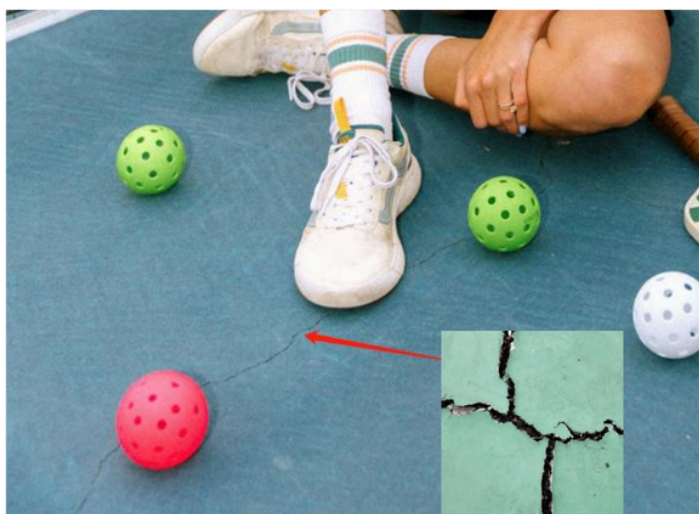



COMPARISON WITH TRADITIONAL ACRYLIC / SILICONE PU MATERIALS

ACRYLIC: LIQUID EPOXY MATERIAL APPLIED ON-SITE, WIDELY RECOGNIZED FOR TENNIS/PICKLEBALL COURTS, ESPECIALLY IN THE US OPEN. OFFERS GOOD ANTI-SLIP PROPERTIES BUT IS RIGID AND PRONE TO CRACKING.

PAP FLOORING: PREFABRICATED, NOT AFFECTED BY BASE CRACKING, FASTER INSTALLATION (2 HOURS FOR ONE WORKER VS. 3–5 DAYS FOR ACRYLIC).

Colors

					
Cherry Red	Red	Orange	Sky Blue	Royal Blue	US OPEN Blue
C:42 M:80 Y:93 K:6	C:28 M:78 Y:55 K:0	C:24 M:55 Y:68 K:0	C:74 M:32 Y:0 K:0	C:83 M:44 Y:20 K:0	C:83 M:56 Y:17 K:0
					
Sapphire Blue	Light Purple	Purple	Dark Purple	Grass Green	US OPEN Green
C:100 M:90 Y:7 K:0	C:32 M:41 Y:0 K:0	C:73 M:80 Y:0 K:0	C:82 M:76 Y:59 K:27	C:78 M:21 Y:76 K:0	C:63 M:13 Y:99 K:0
					
Dark Green	Beige	Iron Grey	Dark Grey	Light Pink	Rose Red
C:86 M:45 Y:89 K:7	C:24 M:20 Y:25 K:0	C:63 M:54 Y:48 K:1	C:82 M:76 Y:59 K:27	C:16 M:64 Y:3 K:0	C:13 M:85 Y:13 K:0

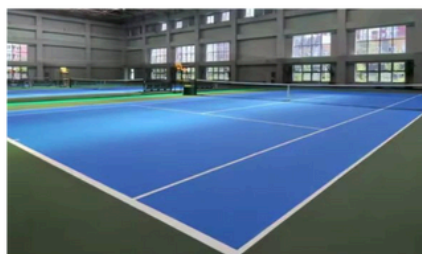

Rentak Hiasan Setia Sdn Bhd (1123987-T)

207, Block C, Pusat Dagangan Phileo Damansara 1
No 9, Jalan 16/11, Off Jalan Damansara
46350 Petaling Jaya Selangor
Tel: 0320951633 Fax: 0320952133
Email: rentakhiasan@yahoo.com