


RF Laminated Tile

Commercial Flooring

■ Application

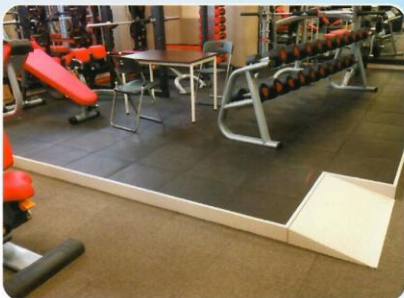


- Kindergarten
- Gym
- Children's Playground
- KTV
- places requested for high safety factors


■ Color Chart




RF1501




RF1502



RF1503



RF1504




RF1505



RF1506



RF1507



RF1508

RENTAK HIASAN SETIA SDN BHD

No 16A, Lorong Ara Kiri 2, Lucky Garden,
Bangsar, 59100 Kuala Lumpur

Tel: 03 20951633 Fax: 03 2095 2133


Email: rentakhiasan@yahoo.com



Recycled Materials
Sustainability & CSR
(Corporate Social Responsibility)
Cradle-to-Cradle Development

RF Laminated Tile

Commercial Flooring



■ Material

Rubber tile is made of high wear-resistant and environment-friendly elastic surface cushion and shock-absorbing foam composite production.

■ Attribution

- Reinforced structure, enhancing the stability of rubber tile
- Excellent performance and long service life
- Excellent sound and shock absorption
- High elasticity, High comfort
- Easy installation, Easy cleaning, Reduced construction and maintenance costs

■ Specification

Item	Thickness	Size	Color
RF Series laminated Rubber tile	15mm~20mm	500mm*1000mm 1000mm*1000mm	Top layer: see the color chart Bottom: multi color

Notes: Dimension tolerance: length and width: $\pm 1\%$, thickness: $\pm 1\text{mm}$

■ Technical Information

Physical characteristics	Test method	Result
Tensile strength	ASTM D882-02	Appr. $\times 1.38\text{Mpa}$
Shore A Hardness		40~60
Elongation at break	ASTM 882-02	$> 150\%$
Temperature resistance		-40°C to 100°C
Combustible index	DIN 4102-14:1990	B2 & B1