

RT SPORTTILE

MODULAR SYSTEM



1

ABOUT US

Get ready to unleash your inner champion with RT Sport Tile – the ultimate interlocking sports floor that's redefining the game! Whether you're hitting the court for basketball, dominating the tennis court, or showing off your skills in Futsal, roller skating, pickleball, or paddleball, RT Sport Tile is your secret weapon for sports supremacy!

Indoor or outdoor, home court or community center, RT Sport Tile brings the thrill of competition to every surface. Engineered for peak performance, our tiles provide unbeatable grip, reducing fatigue and preventing injuries, so you can push your limits and play your best.

Crafted from premium virgin polypropylene, our Modular Sports floors aren't just high-quality – they're also eco-conscious, because we believe in playing hard while taking care of our planet. And with roots dating back to 2012, RT Sport Tile has been leading the charge in sports flooring innovation ever since!

So, lace up your shoes and get ready to dominate the game with RT Sport Tile. Whether you're a seasoned pro or just starting out, with RT Sport Tile, every match is an opportunity to shine!

Material comes from



2 TECHNOLOGY

Backside cross ribs structure

Provides stronger bearing capacity, avoid deformation and ensure a better buffering effect.

50 pieces of elastic cushion on each tile

The design inspiration comes from NBA basketball court structure, which gives player an excellent ball bounce rate as well as a better anti-slip performance.

New upgraded safety guard system(SG Tool)

Is added to anti-theft, anti-wind, it is especially good for harsh environment. SG tool adopts high-tech aviation material, and easy to install.

Best elastic material innovatively


Preserved the elasticity of rubber and the strength of PP. Super flexible and non-deformation

New anti-arch design with elastic cushion and 2mm elastic gap prevent bulging and cracking.



3

MULTIPURPOSE COURT

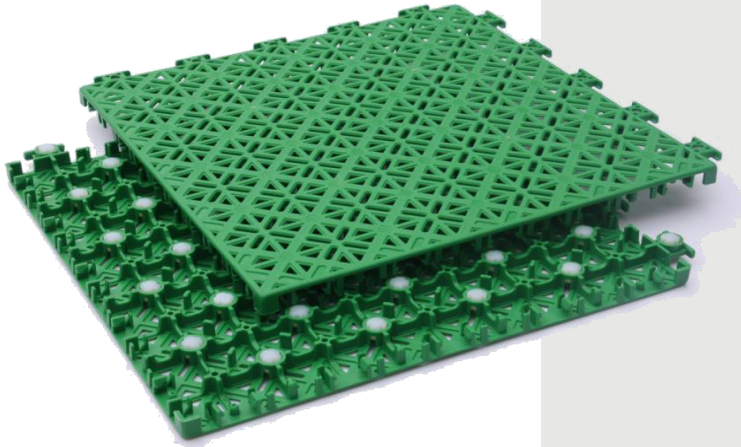

RT Elastic Pro

This outdoor sports floor is made of high-quality PP material with shock-absorbing pads of high-elastic TPE material. Its ball rebound rate reaches 92%, and its shock absorption performance is 50%. So it is the best surface material for outdoor basketball courts.

Weight: 430±5g/piece

Size: 303.8*303.8*15mm

Color: 12 standard Color

Elastic Pro can be used not only for basketball courts, tennis courts, and pickleball courts, but also for the construction of skating rinks, hockey and other courts. We chose this surface after hundreds of tests. First, it's flat enough. Second, its non-slip performance is up to par

In order to avoid the possible displacement of the modular floor under high-intensity sports, our Elastic Pro are designed with a fixing device. It is hidden in the middle of the tile, and its structure will not be damaged when installed, and its beauty will not be affected.



4 TENNIS


RT Diamond

We use high-quality PP material to make our sports floor. The surface of our tennis court floor has a double-layer, cross-shaped design. Therefore, small balls such as tennis balls have a consistent ball bounce on it, and the trajectory of the ball is not affected. In addition, it has high elastic shock-absorbing pads. Its ball rebound rate reaches 92%, and its shock absorption performance is 50%. So it is the best playing surface material for indoor and outdoor tennis court.


Weight: 830±10g/piece

Size: 500*500*15.8mm

Color: 12 standard Color

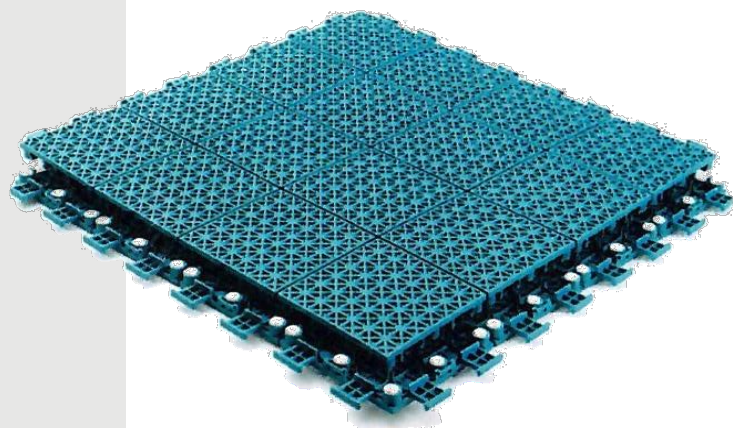

5 PICKLE BALL

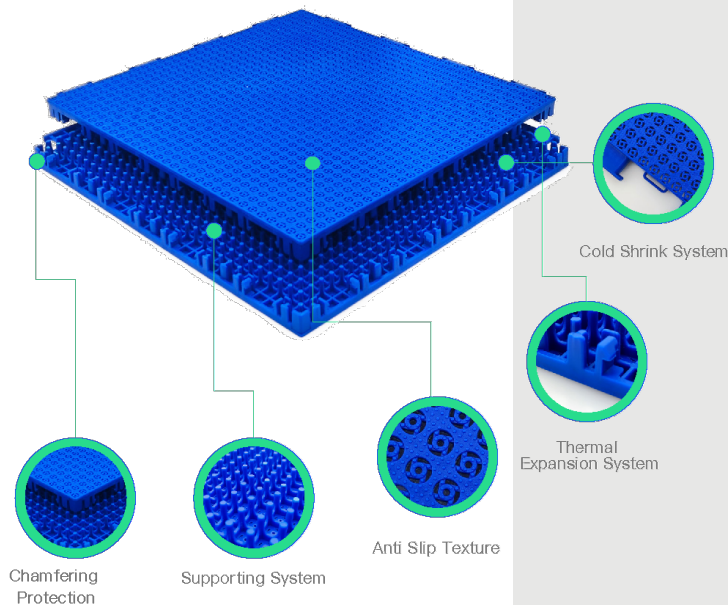

Pickleball is the fastest growing sport in recent years, so RT has improved the court tiles surface for pickleball. So our tiles' ball rebound speed and direction are now as good as on concrete. After testing, their ball rebound coefficient meets the requirements of [The International Federation of Pickleball](#) (IFP).

Our modular pickleball surface have become the first choice of most pickleball court builders, because of its high safety and it can be installed and disassembled quickly.

RT PickleBound

PickleBound is an affordable pickleball court surface. This model is special designed for pickleball courts, the density small holes and bumps to offering excellent slip resistance performance. And the density supporting column on the backside contribute to more uniform and consistent ball bounce. This model will provide professional sports experience, suitable for professional pickleball and tennis player. Using it, you don't have to maintain it from time to time, maintenance-free design.

Weight: 360±10g/piece

Size: 304*304*14.8mm

Color: 12 standard Color



6

COLOR CHART

**NATURAL AND VIBRANT
COLOURS FOR MULTISPORTS**

All Colors are available with
Elastic Pro Diamond
Grid Unity 9 II



7

HOW TO TAKE CARE OF YOUR FLOOR?



Soil, mud, fallen debris from nearby trees, splashing from watering systems, or even chemicals or other materials can cover the courts.

Over time, grass or moss can also appear in the interstices of the tiles.

The following maintenance recommendations should then be followed.

REGULAR MAINTENANCE

Depending on the appearance of the court, we recommend different types of cleaning described in the table below.



Leaf blower PPE:
Gloves,
Goggles, Auditory
protection



**High pressure
cleaner PPE:**
Gloves,
Goggles,
Auditory protection

	Equipment used	Cleaning products	Cleaning methods
Basic cleaning of the tile surface Removal of light debris from the surface		-	Blowing with the tiles on the floor.
Basic cleaning of tiles Removal of debris from the interstices of tiles		Water	High pressure projection at 82 bars max (1,200 psi max) with tiles on the ground.
Thorough cleaning Removal of debris and vegetation from the interstices of tiles and on the substrate		Water	• Removal of tiles or lifting all the tiles. • High pressure projection at 82 bars max (1,200 psi max) through the tiles. • Cleaning of the substrate below the tiles.



8

DATA SHEET

EN 14904 Standard


PROPERTY	TEST METHOD	UNIT	STANDARD	Elastic Pro	Diamond	PickleBound
Product Description						
Thickness	-	mm		15	15.8	14.8
Weight	-	g/pcs		430	830	360
Size	-	mm		303.8*303.8	500*500	304.8*304.8
Sport Properties						
Surface Friction	EN 13036-4	-	80-110	83	102	80-110
Shock Absorption	EN 14808	%	25-75	56	67**	>25
Vertical Deformation	EN 14809	mm	≤5.0	2.4	2.2	≤5.0
Vertical Ball Rebound	EN 12235	%	≥90	93	97	≥90
Technical Characteristics						
Resistance to Rolling Load	EN 1569	mm	≤0.50	0	Conform*	Conform*
		-	No Damage	No Damage	-	-
Resistance to Wear	EN ISO 5470-1	g	≤0.08	0.07	-	-
Resistance to Indentation	EN 1516	mm	≤0.5	0.18	-	-
Classification						
Fire	UL94	-	HB	Pass	Pass	Pass
Anti-Bacterial Activity		-	-	>99% Inhabits Growth		
Anti - Static	ANSI/ESD STM 11.11-2015	-	-	1.1 x 10 ¹³ Ω/sq		

* When the load is 15KN, the floor should not be cracked. Broken, split and other damage

** Measuere in different methods; standard is >40%->75%

The proposed specifiations fall within the tolerance limits usually accepted in this sector whilst still complying with standards.

9 PROJECTS

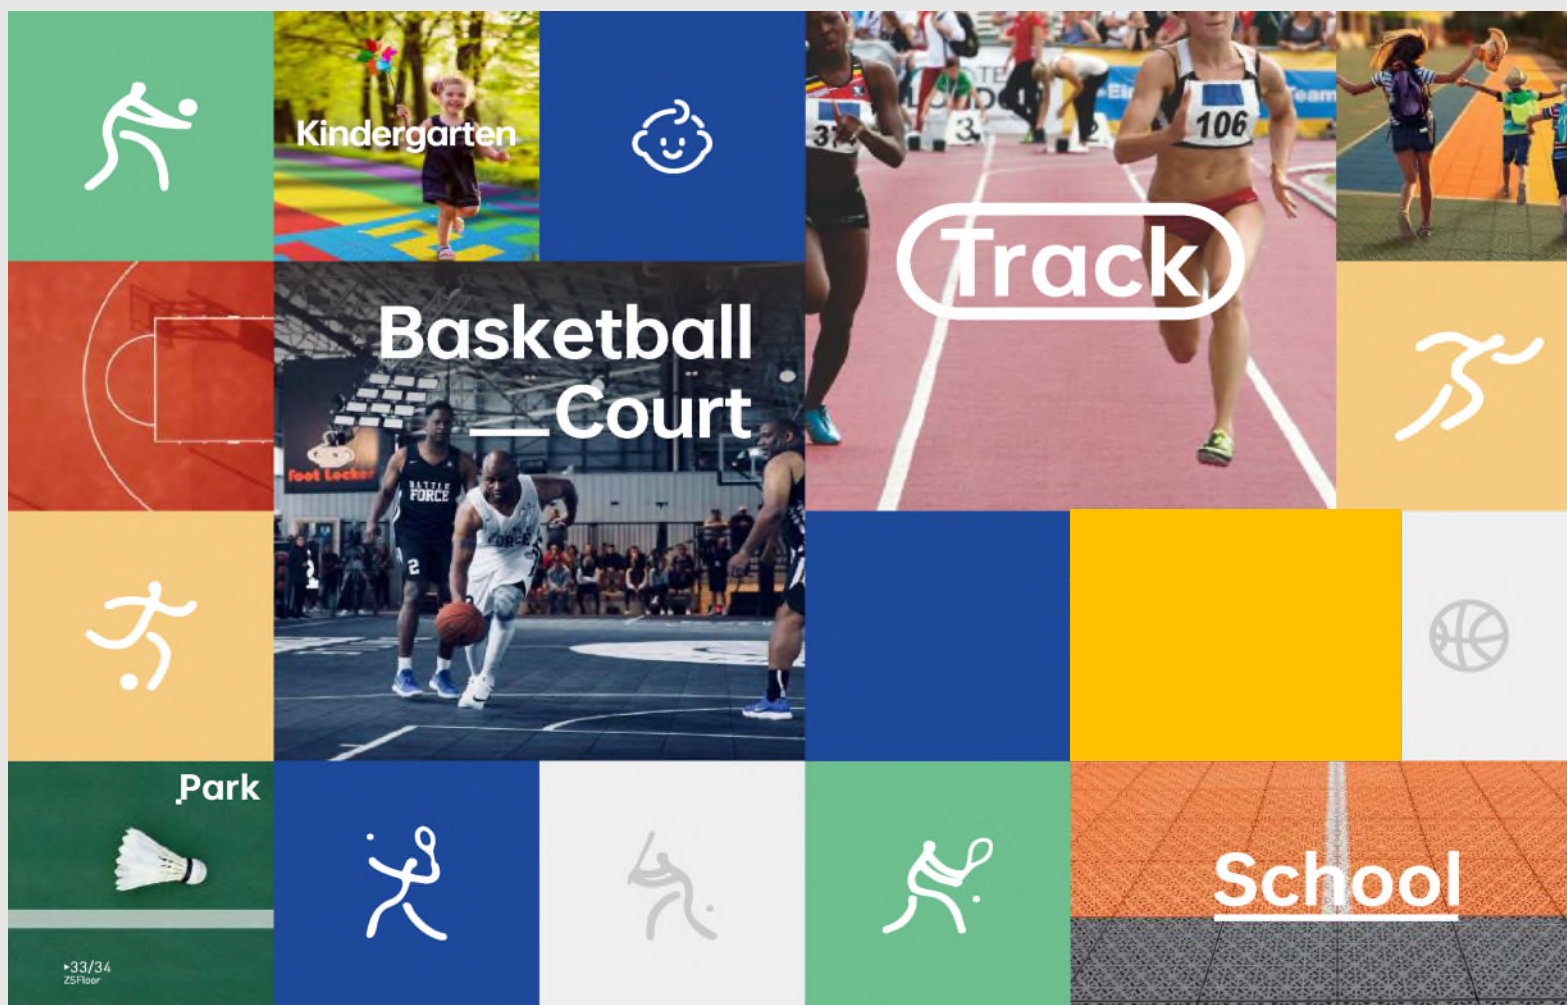





Rentak Hiasan Setia Sdn Bhd
a Gerflor partner

(1123987-7)

16A, Lorong Ara Kiri 2 | T + 603 2095 1633
Lucky Garden 59100 | F + 603 2095 2133
Bangsar, Kuala Lumpur
Malaysia.

Email: rentakhiasan@yahoo.com
www.rentakhiasan.com