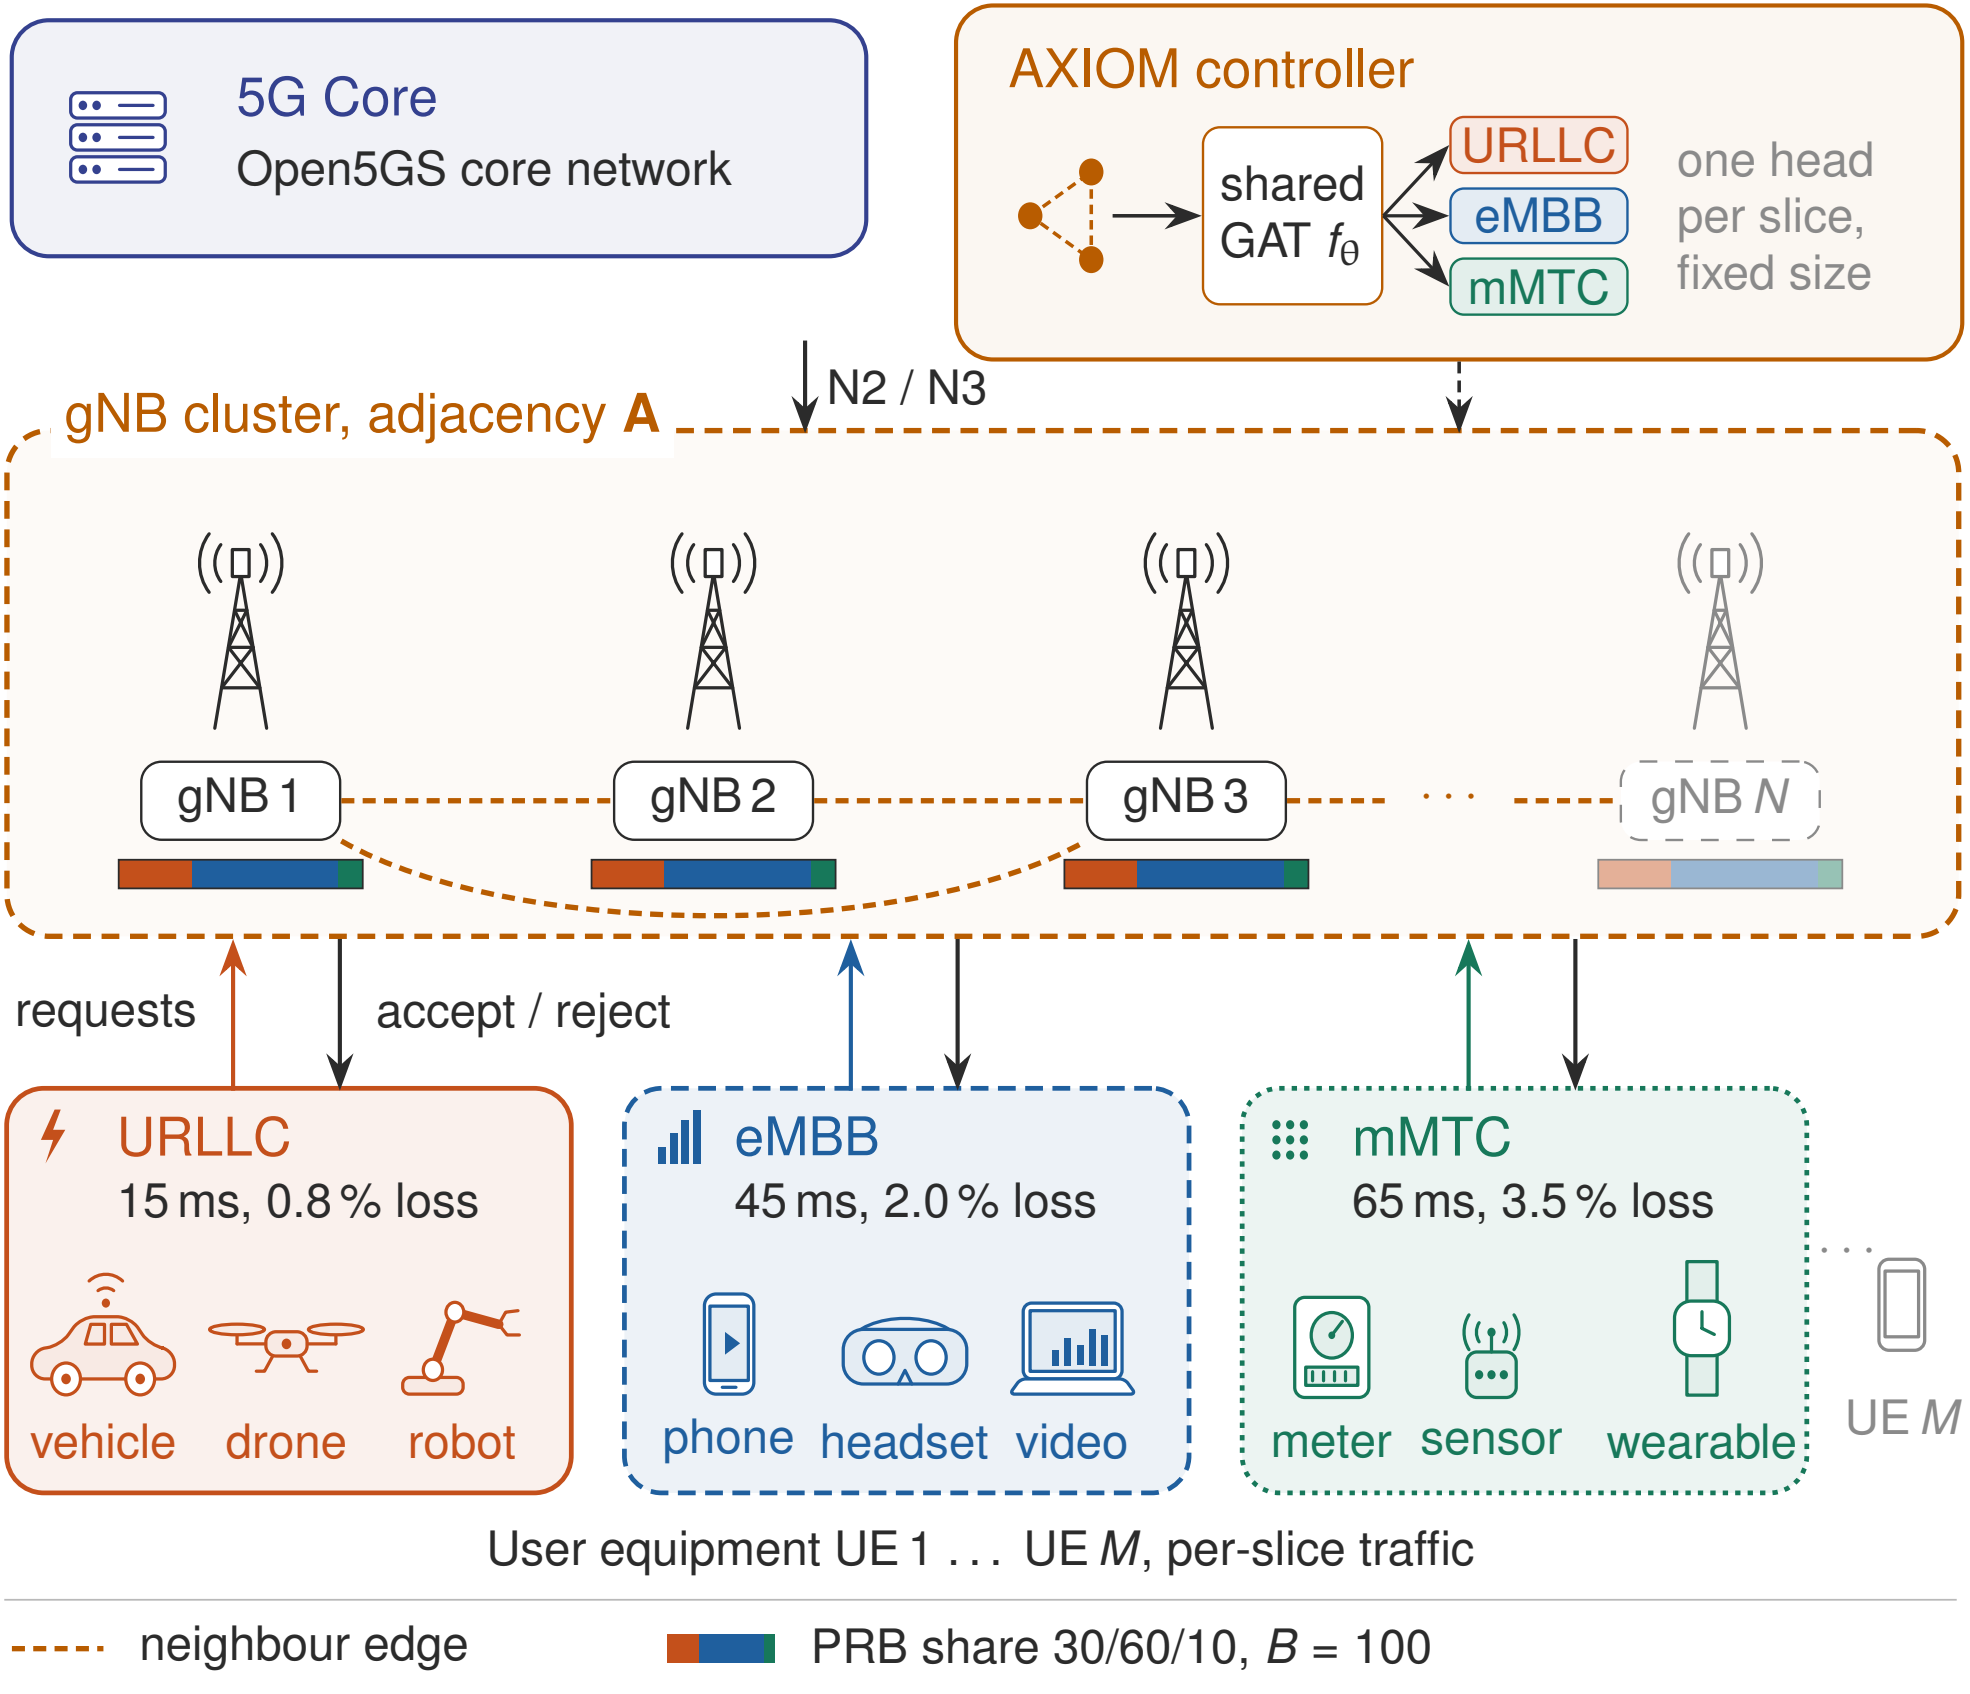
5G Core
Open5GS core network
AXIOM controller
shared GAT f_θ
URLLC
eMBB
mMTC
one head per slice, fixed size
N2 / N3
gNB cluster, adjacency A
gNB 1
gNB 2
gNB 3
gNB N
requests
accept / reject
URLLC
15 ms, 0.8 % loss
vehicle
drone
robot
eMBB
45 ms, 2.0 % loss
phone
headset
video
mMTC
65 ms, 3.5 % loss
meter
sensor
wearable
UE M
User equipment UE 1 . . . UE M, per-slice traffic
neighbour edge
PRB share 30/60/10, B = 100