No guarantee can be given in respect of this translation
In all cases the latest German-language version of this standard shall be taken as authoritative

SMS DEMAG
SMS group

Low-pressure hoselines

Hoses

SN 544
Part 2

Dimensions in mm

1 Field of application

Low-pressure hoselines can be used for fluids such as lubrication oils, lubricating greases, cooling water, emulsions, gases (except liquid gas), and air.
Their temperature resistance for liquids is between –30 °C and +110 °C.
Furthermore, they are weather-resistant, non-ageing and abrasion-resistant.

2 Dimensions and example of designation

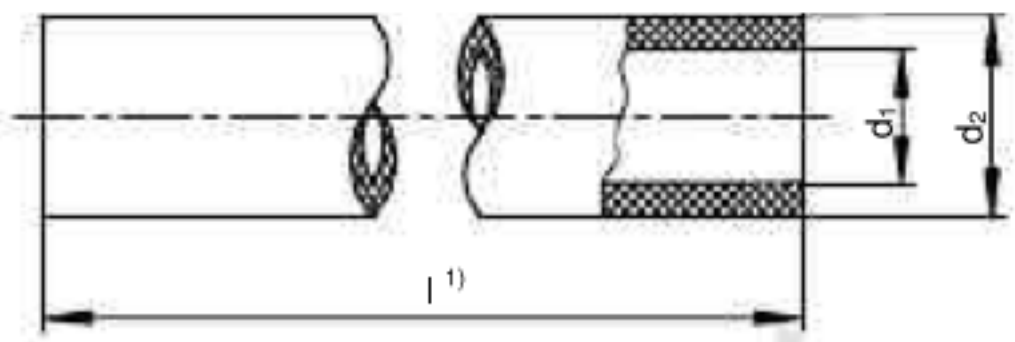

Designation of a hose for low-pressure hoselines (N) of nominal size DN 25 and length [1] l = 500 mm:

Hose SN 544 - N 25 x 500

Nominal size	DN	d_1	d_2	Operating pressure [2] bar	Smallest bending radius (referred to hose axis)	Weight kg/m	Supplier's designation
N20	20	19	31	20	70	0,7	TW 19
N25	25	25	37	16	80	0,9	TW 25
N32	32	32	44	16	90	1,2	TW 32
N40	40	38	51	16	100	1,4	TW 38
N50	50	50	66	16	130	2,1	TW 50
N63	63	63	79	16	160	2,7	TW 63
N75	75	75	91	16	180	3,3	TW 75
N100	100	100	116	16	250	4,7	TW 100

Hoselines according to SN 756 are used for low pressure hoselines up to DN 16.

This copy will not be updated in case of changes!

docin.com
www.docin.com

3 Material and design

"Gelbring" (hose with yellow ring marks) with non-buckling steel spiral, acc. to *TRbF 131/2* (TRbF refers to technical directions for inflammable liquids), inside and outside smooth, for all kinds of mineral oil products.Temperature range –30 °C to +90 °C (momentarily up to 110 °C). Electric resistance < 10^6 Ohm.
Design approval according to Bundeswehrnorm (German Federal Armed Forces standard) VG 95 955-3 (type S). Corresponds to DIN EN 12115 and DIN EN 1361 E.

Inside coating: Perbunan (NBR), antistatic, leach-resistant

Reinforcement: Two layers of textile braiding with intermediate zinc-coated steel spiral in the conducting layer.

Outside coating: Chloroprene (CR) black, electroconductive

The inside rubber of the type TW has low diffusibility, is swellproof, flexible at low temperature, non-discolouring and non-hardening, but sensitive to ozone. Hoses which are not in use must therefore be **stored only with their ends closed**. The outside rubber is highly abrasion-resistant and absolutely weather-resistant. Corresponds to material group NBR 1 of DIN EN 12115.

Labelling: Yellow ring marks at 2.5 m spacing and continuous relief embossing or branding iron marking:

e.g. TW 50 · VG 95955 S · EN 12155 NBR1 · SD · EN 1361 E · R<10^6 Ω · TRbF 131 · Ω · 01.02

For footnotes see page 2

Continued on page 2

The reproduction, distribution and utilization of this document as well as the disclosure of its content to others without prior explicit written consent of SMS Demag AG is prohibited. Holder has to protect this document against unauthorized withdrawal of third parties. Offenders will be held liable for the payment of damages. All rights reserved in case of patent/utility model/trademark protection.

Referenced standards

DIN EN 1361	on rubber hoses and hoselines for aircraft fuelling, requirements
DIN EN 10218-2	Steel wire and wire products – General – Wire dimensions and tolerances
DIN EN 10270-1	Steel wire for mechanical springs; patented cold drawn unalloyed spring steel wire
DIN EN 12115	on rubber and plastic hoses and hoselines for liquid or gaseous chemicals - Specification
DIN EN 12166	Copper and copper alloys; Wire for general purposes
SN 532-1	SAE flanges with flanged welding neck, 3000 PSI and 6000 PSI; flange joint, flange coupling
SN 532-2	SAE flange, semiflanges, solid flange, flanged welding necks, blind collar
SN 544-1	Low-pressure hoselines
SN 544-3	Low-pressure hoselines; hose fittings
SN 544-4	Low-pressure hoselines; double nipple, welding nipple
SN 545-1	Couplings without check valves for low-pressure hoselines; clamping rings, cam connectors
SN 545-2	Couplings without check valves for low-pressure hoselines; hoseline tips
SN 545-3	Couplings without check valves for low-pressure hoselines; blind plugs
TRbF 50	on pipelines / contains annexes A & B

(TRbF: technical directions for inflammable liquids)

TRbF 131-2	*Invalid, superseded by TRbF 50*	Hoselines
VG 95 955-3	on fuel hoses for fuelling and pipelines, suction-pressure hoses with steel wire spiral Type S	

Further standards

SN 756	High-pressure hoselines
SN 757	High-pressure hoselines; hoses
SN 758	High-pressure hoselines; hose fittings, types A to G
SN 759	High-pressure hoselines; male studs, weld-on sockets

docin 豆丁
www.docin.com

Revision of February 2004

Correction of faulty values d_2.

Previous editions

1962-09, 1972-07, 1973-03, 1975-09, 1976-07, 1978-11, 1989-02, 1994-04, 1998-05, 2002-07, 2003-06

---

1) The lengths are to be specified according to the requirements.
2) The testing pressure is 1.5 times, the minimum bursting pressure is 3 times the operating pressure.