

Health and Safety

Tarmac UK

Hazard Identification & Risk Assessment Standard STAN-17E

CONTROLLED DOCUMENT

Document Issued for Use From:

January 2017

CONTENTS

SECTION	CONTENTS	PAGE
1	Introduction	2
2	Scope	2
3	Definitions	3
4	Responsibilities	3
5	Requirements	3
5.1	HIRA – Hazard Identification Risk Assessment	4
5.2	HIRA Review	6
5.3	Communication of Findings	6
5.4	Inventory of Risk Assessment	7
5.5	STOP Assessment	7
5.6	Method Statement	8
5.7	SOP – Standard Operating Procedure	8
5.8	Training	9
6	Associated Documents	9
7	Document Control	9
Appendices	See Separate Supporting Documents	

Health and Safety

1 Introduction

This standard will set out the Tarmac UK mechanism for identifying hazards and eliminating, reducing, and controlling the risks associated with our work activities. This will help to reduce the potential for ill health, injury, environmental or structural damage and any other loss to an acceptable level.

2 Scope

This standard only covers employees, dayworks contractors, workplaces, and operations within Tarmac UK. For National Road Planing (NRP) and Traffic Management (TTM) see business specific processes. Contractors other than dayworks contractors are covered by the contractor management standard within the safety management system.

3 Definitions

Acceptable Level – Where the level of risk is controlled as far as is reasonably practicable.

Competent – A term used to describe a person or persons with the combination of training, skills, experience and knowledge and the ability to apply them to perform a work task or activity correctly and safely.

Control Measures – The things that we do, the equipment that we use and how we use it to either eliminate a hazard or reduce the risk presented by the hazard to an Acceptable Level.

Dayworks Contractor – Where a contractor is used and paid by the hour for works that are directly instructed, supervised, and managed by Tarmac.

Excom/SLT – The Tarmac UK / Cement & Packed Products Leadership Teams

Hazard – Something that has the potential to cause injury or adverse health effects for people, or cause damage to the environment or assets.
Hazards can include articles, substances, plant or machinery, methods of work, the working environment, and other aspects of work organisation.

HIRA – Hazard Identification and Risk Assessment.

Job Briefing Sheet (JBS) – The JBS is an additional assessment tool to be used to ensure all activities have been adequately risk assessed in the HIRA and to confirm if any additional hazards have arisen and require control. It is a documented process and assists in the review of the risks posed for the activity / task to be carried out. *Please note that a JBS is only to be used within Pavement Solutions and transient Pave locations, for all other locations please refer to a STOP assessment.*

Method Statement (MS) – A method statement describes in a logical sequence exactly how a task is to be carried out in a way that protects health and safety and includes all the control measures. This allows the job to be properly planned with the appropriate health and safety resources needed for it. Where the Risk Rating (RR) is 5 or above and additional control measures cannot be implemented to further reduce the Risk Rating then a Method Statement shall be written. *Please note that a Method Statement is not used within Pavement Solutions or transient Pave locations, instead refer to the Job Briefing Sheet (JBS).*

Risk – The probability or likelihood that someone / the environment is harmed or an asset damaged.

Risk Assessment (RA) – A logical and planned process whereby hazards present within the workplace or resulting from an operational activity are identified. The risks from these hazards are then evaluated, and control measures are identified and put in place to reduce the risks to an Acceptable Level.

Routine – A sequence of actions regularly followed.

Health and Safety

Significant – Something that is deemed to be sufficiently great or important enough to be worthy of attention.

Standard Operating Procedure (SOP) – A set of instructions for routine activities / tasks not typically subject to change based on the findings within the Risk Assessment process. Once individuals are trained and the Standard Operating Procedure has been implemented a further Risk Assessment is normally only required after a significant change in the activity / process is noted. Where the Risk Rating (RR) is 4 or below then for routine activities a Standard Operating Procedure should be written and used. *Please note that an SOP is not used within Pavement Solutions or transient Pave locations, instead refer to the Job Briefing Sheet (JBS).*

STOP Assessment – A STOP Assessment is an additional assessment tool to be used when a change to an activity or task that has been risk assessed is identified that could pose an additional risk or risks and warrants additional controls (in addition to those in the HIRA/SOP/MS) to reduce the risk to an Acceptable Level. It is a documented process and assists in the review of the risks posed for the activity / task to be carried out. *Please note that a STOP Assessment is not used within Pavement Solutions or transient Pave locations, instead refer to the Job Briefing Sheet (JBS).*

Suitable and Sufficient – This refers to the hazard identification and risk assessment processes that demonstrate enough quality and detail without requiring excessive workload, time, cost, and effort. All risk assessments must be 'suitable and sufficient', i.e., show that a proper check was made identifying who might be affected, dealing with all the foreseeable significant risks, considering the number of people who could be involved, that the precautions are reasonable, and the remaining risk is low and that workers or their representatives have been involved in the process. The level of detail in a Risk Assessment should be proportionate to the risk. Insignificant risks can usually be ignored, as can risks arising from routine activities associated with life in general, unless the work activity compounds or significantly alters those risks.

WEL (Workplace Exposure Limit) - Workplace exposure limits (WELs) are occupational exposure limits approved by regulatory authorities and the limits are set to help protect workers' health.

4 Responsibilities

Localised and site management shall ensure the implementation of this standard in full at their sites, plants and offices

The process of assessing risk will only work if those 'on the ground' understand what is required and are fully supported in meeting the expectations of this standard. This includes:

- Local procedures being developed in order to support the requirements of this standard.
- Involvement of employees across the business in identifying hazards and carrying out risk assessments; and
- Following the control measures set out in the HIRAs, MSs, SOPs and JBS and raising any concerns they may have through the appropriate channels

Where contractors' employees are under the direct control of the site / plant / depot i.e., daywork contractors, they shall fully comply with the requirements of this standard and follow the control measures set out in any HIRA, MS, or SOP

Health and Safety

5 Requirements

5.1 Hazard Identification Risk Assessment (HIRA)

Where appropriate, i.e., when a risk is significant, the recording of RAs shall be completed on a HIRA document (see [IMSF 61](#)). Should a business unit or site decide not to use the sample HIRA provided in Appendix 1 then the document must be approved for use by a senior member of the health and safety team and contain as a minimum all of the information detailed within the sample HIRA.

The RA and risk rating process shall be carried out by competent people consulting others within and outside the business, as required. Often, those most familiar with the activity being performed will be best placed to identify appropriate control measures.

All tasks and activities that require a HIRA, shall undergo a HIRA prior to the activity commencing. Insignificant risks identified during the RA do not need to be recorded.

All personnel who carry out tasks for which only a HIRA is required shall be briefed in the contents of the HIRA alongside the necessary Control Measures identified and a record of the briefing is to be made and kept on record.

Where the Risk Rating requires it, HIRAs shall serve as the starting point for writing a MS or SOP. (For Pavement Solutions and transient Pave locations see [IMSF 97 - JBS](#)).

This shall ensure that suitable and sufficient control measures are in place so that the risks are minimised to acceptable levels.

To assist in the production of a HIRA the table below shall be used to understand severity and likelihood levels and to produce a Risk Rating

				LIKELIHOOD					
	Safety	Health	Environment		Rare This will probably never happen	Unlikely Do not expect it to happen but it is possible it may happen	Possible Might happen occasionally	Likely Will probably happen but is not a persisting issue / circumstance	Almost Certain Will undoubtedly happen possibly frequently
					1	2	3	4	5
S E V E R I T Y	No Treatment Injury	Exposure atWEL / lower action level	Temporary negative impact	1	1	2	3	4	5
	First Aid Case	Exposure atWEL with short term effect	Negative impact on site	2	2	4	6	8	10
	Medical Treatment Case	Exposure above the WEL resulting in the long term effect	Negative impact off site - locally	3	3	6	9	12	15
	LTI / RIDDOR	Life Changing / Permanent Disability	Enforcement action / negative impact wider area	4	4	8	12	16	20
	Disability / Fatal	Life Threatening	Prosecution / negative impact nationally	5	5	10	15	20	25

Where there is a Risk Rating of 12 or higher, then the task shall not proceed until the risk is reduced by the introduction of additional Control Measures. If it is not possible to reduce the risk rating to 10 or below then the works shall remain stopped and further assistance shall be sought. Examples of such assistance could include an occupational health specialist, engineering or a HSE Advisor, however, this list is not exhaustive.

Where the RR is 5 or above and additional control measures cannot be implemented to

Health and Safety

further reduce the RR then a Method Statement shall be written (For *Pavement Solutions* and *transient Pave locations* see JBS).

Where the RR is 4 or below then for routine activities a SOP should be written and used, for non-routine activities the use of a HIRA would be sufficient. (For *Pavement Solutions* and *transient Pave locations* see JBS).


Flow charts to support the process can be found in [Risk Assessment Flow Chart - Appendix 2.](#)

To assist in completing a HIRA then it is important that we follow and identify the Hierarchy of Controls (see table below).

On the HIRA the Control Measures in place for undertaking the task should be described and then identified on the hierarchy list into which category the Control Measure falls.

Using a Control Measure that is higher up the hierarchy can often help in improving the controls to mitigate the risk. The Control Measures in the hierarchy of control are not mutually exclusive and there will be cases where more than one category of Control Measure will be required.

HIERARCHY OF CONTROL	
H1	ELIMINATE
H2	REDUCE
H3	ISOLATE
H4	CONTROL
H5	PPE
H6	DISCIPLINE

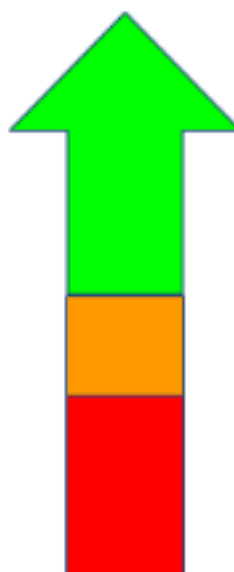

All HIRAs are to be completed by site, however there may be risks that can arise as operational risks that are covered off by specialist 3rd parties using their own risk assessment documentation, the HIRA completed by site in these cases should refer to these documents. Examples of specialist 3rd party risk assessment documentation may include legionella, fire, asbestos, geotechnical, structural, and dangerous substances risk assessments amongst others.

Alternative RA formats may also be used for specific areas such as manual handling, control of substances hazardous to health and display screen equipment amongst others.

Health and Safety

5.2 Hazard Identification Risk Assessment Review

HIRAs and their associated documents, i.e., MSs, SOPs and JBS shall be reviewed:

- Following an incident (which may include a near miss).
- Where the relevant process or workplace undergoes a change.
- When a deficiency in the process has been identified; and
- Where industry best practice develops improved controls, procedures, processes, or equipment.

Aside from the above, HIRAs and their associated documents shall be subject to a formal review by a Competent person at least:

- every 2 years where the RR is between 5 and 10; and
- every 3 years where the risk rating is 4 or below

Where HIRAs and their associated documents, i.e., MSs, SOPs and JBS are reviewed at their time of use by a competent person, a record can be made of the review within the inventory (Appendix 1) which can act as a formal review.

Reviews of HIRAs and associated documents i.e., MSs, SOPs and JBS are only required for active tasks. If there are historical HIRAs and associated documents that are only used outside of the formal review timeframe then the review can be carried out when the task is carried out again, prior to the work commencing. Where a review identifies a significant change and that additional controls are required then the HIRA and any associated SOPs, MSs and JBS shall be updated. These updated documents shall be version controlled and where appropriate supersede all previous documentation stored.

5.3 Communication of Findings

Localised and site management shall ensure that there is a process in place for communicating the HIRA findings and any associated documentation i.e. MSs, SOPs and JBS to all employees, dayworks contractors, and visitors who are affected by them. This communication programme can take the form of:

- Induction programme
- HIRA / MS / SOP / JBS / team briefings
- Start of shift briefings
- Safety discussions prior to the commencement of the task / activity
- Health and Safety meetings

Where communication between employees, dayworks contractors, and visitors has taken place then this shall be captured and documented.

Health and Safety

5.4 Inventory of Risk Assessment (See [IMSF 62](#))

An Inventory of Risk Assessments shall be produced and reviewed as required.

Every site shall produce an Inventory of Risk Assessments which is a record of all HIRAs completed for the site. In conjunction with the list the document shall provide the following information:

- HIRA references (unique to the document)
- Dates of HIRA Completion
- Dates for HIRA review
- Areas / Locations on the site for which the HIRA is relevant – i.e., it may be a requirement to carry out the same task in different areas of the site where the hazards and controls differ considerably. In this case to avoid confusion more than one HIRA is created e.g., HIRA 1 is conducted on the main site on land HIRA 2 (same task) is completed down a banking near water
- Highest RR from the HIRA
- Whether the task is Routine or not
- MS reference
- SOP reference

This inventory shall be reviewed for compliance with the above, by a Competent member of the site management team annually.

The inventory is not applicable for Pavement Solutions or transient Pave locations.

5.5 STOP Assessment (See [IMSF 96](#))

A STOP Assessment is an additional assessment tool to be used when a change to an activity or task that has been risk assessed is identified that could pose an additional risk or risks and warrants additional controls (in addition to those in the HIRA/SOP/MS) to reduce the risk to an Acceptable Level. It is a documented process and assists in the review of the risks posed for the activity / task to be carried out.

Should a business unit or site decide not to use the sample STOP assessment provided in Appendix 3 then the document must be approved for use by a senior member of the health and safety team and contain as a minimum all of the information detailed within the sample STOP assessment.

Examples of specific changes that may pose additional risk include:

- Weather
 - Wind, rain, snow, ice etc.
- Physical Obstructions / changes
 - Plant, equipment, or materials stored close to the work area
 - Lighting levels
 - Change of access / egress to work location
- Other activities
 - Other contractors completing works
 - Lifting operations
 - Noise, dust, or vibration which could impact works
 - Mobile plant movement
- 3rd Party's
 - Members of public nearby / could be impacted by activities

Health and Safety

However, if **Significant** risk(s) is/are identified by a STOP Assessment, then a review of the relevant HIRA is required. The same applies if after undertaking a STOP Assessment it is not safe to proceed.

STOP is an acronym for:

Stop before you start

Think of any risks or additional risks

Organise controls or additional Control Measures if required

Put it down on paper

For Pavement Solutions and transient Pave locations the STOP assessment process is not applicable, and reference should be made to the JBS form ([IMSF 97](#))

5.6 Method Statement - MS (See [IMSF 60](#))

A MS shall be written where the HIRA process has determined that:

- the RR is 5 or above and additional Control Measures cannot be implemented to further reduce the RR.
- a permit to work is required; or
- where the Control Measures are complex e.g. – multiple controls in required sequence

MSs shall be written, reviewed, and accepted by a Competent person(s).

Where a MS exists, all personnel undertaking the task shall:

- be briefed on the contents by a Competent person; and
- sign up to the MS to confirm their understanding and agreement to comply with it.

A register or record for all existing MSs for a particular site shall be kept in the Inventory of Risk Assessments document.

For Pavement Solutions and transient Pave locations refer to the JBS.

5.7 Standard Operating Procedure (SOP) – (See [IMSF 59](#))

A SOP shall be written where:

- Risk Rating is 4 or below
- the task / activity is carried out regularly.
- the task / activity is not subject to any kind of change; and
- the task lends itself to a step-by-step instruction.

Where a SOP exists, all personnel undertaking the task shall:

- be briefed on the contents by a Competent person.
- sign up to the SOP to confirm their understanding and agreement to comply with it; and
- cease activities and inform their supervisor should anything change within the process so that those changes can be assessed and, where appropriate, the documentation updated.

Health and Safety

A register or record for all existing SOPs on a particular site shall be kept in the Inventory of Risk Assessments document.

For Pavement Solutions and transient Pave locations refer to JBS.

5.8 Training

Localised and site management shall ensure that those identified to carry out the HIRA process are Competent to do so.

6 Associated Documents

See IMS Management System – Health & Safety Standards

7 Document Control

REVISION NOTES:				
Section	Page	Version	Reason for change	Date
All	All	1.4	Review & Integration of Tarmac UK HIRA standards	March 2024

Appendix 1: Sample Inventory of Risk Assessment

Appendix 2: Risk Assessment Flow Chart

IMSF 61: Sample HIRA Form

IMSF 96: Sample STOP Assessment Template

IMSF 60: Sample Method Statement Template

IMSF 59: Sample SOP Template

IMSF 97: Job Briefing Sheet