

KEMBER INTERIORS

Brand Guidelines

The New Zealand brand and document system for Kember Interiors. Built on the Frevini Studio design system, carrying Kember's own name, colour, material and engineering story.

VERSION 1.1 · SEPTEMBER 2026



One system. Kember's own story.

Kember Interiors shares a design system with Frevini Studio and nothing else. The master brand must hold floor, wall, ceiling, joinery and components; its positioning is being defined separately, and this guide leaves room for it.

ESTABLISHED BY KEMBER

"Where Craftsmanship Meets Nature.
American Northern Oak for Every Room."

American Northern Oak from certified forests.

Three-ply, all-hardwood engineered construction: 4 mm wear layer, 11 mm core, 4 mm balancing layer.

Hardwax oil finish. Lifetime warranty, subject to maintenance.

Family-owned, vertically integrated.

TRANSFERRED FROM FREVINI

Typography — Marcellus and DM Sans, the same hierarchy and sizes.

Layout — 12-column A4 and 16:9 grids, margins, spacing scale, footer logic.

Restraint — one brand colour, square corners, horizontal rules only, no boxes or shadows.

Documents — the cover, page, slide and poster archetypes.

Voice — short statement, then a sentence of proof.

KEMBER'S OWN

Name and lock-up — KEMBER INTERIORS. The wordmark is retained; "kreative interiors" is retired for New Zealand.

Colour — Kember Umber, drawn from the deep oak fields already used by Kember.

Material — American oak, in Kember's own photography.

Engineering — the three-layer section as an information device.

Products — Flooring, Wall + Ceiling, wider capability, labelled by availability.

Working expression — "American oak. Engineered for stability." Provisional until the positioning work is complete.

Shared system, separate brands

A exact Kember · B existing Kember · C transferred from Frevini · D Kember adaptation

ELEMENT	FREVINI STUDIO	KEMBER INTERIORS
Primary colour	Frevini Green #253C1B	Kember Umber #312011 (B, D)
Fields	Warm White #FAF5EB · White	Oak White #F6F1E9 · White (D)
Utility colour	Olive #8B9770	Kember Slate #8A8F94, from the existing wordmark grey (D)
Typefaces and scale	Marcellus · DM Sans	Identical (C)
Grid, spacing, footer	12 columns · 22/20/24/20 mm · XS–XXL	Identical (C)
Graphic devices	Rule, arrow, thin-line icon	The same, plus the three-layer section device for engineering content (D)
Photography	European oak, forest, factory, finished floors	American oak, floor, wall, ceiling, engineering, making (D)
Logo	Framed wordmark, top-left, once per face	Wordmark lock-up, same placement (C); no frame, no tagline (D)
Voice	Built not Branded.	Provisional working expression (D)

One mark, one colour.

Logo

Wordmark reconstructed from kemberfloors.com captures · the official master governs



The lock-up: the retained KEMBER wordmark with INTERIORS in DM Sans Medium, +0.22 em, right-aligned to the wordmark. Clear space = half the wordmark height on all sides.



Reversed on Kember Umber or over darkened photography.

Minimum width 30 mm print · 130 px screen (wordmark alone 22 mm · 96 px)

Cover width 44 mm on A4 · 210 px on a slide

Position top-left at the margin; bottom-left on posters

Appears on covers, title and closing slides, posters, product sheets. Interior pages carry the running footer.

Colour Kember Umber or white only. The grey and blue of the current mark are not used in New Zealand material.

Never “kreative interiors”, outlines, shadows, stretching, rotation, watermarks, or two marks on one face.

Colour

Core carries every document. Utility colours live in tables, charts and icons. Photography supplies the rest.


CORE PALETTE



KEMBER UMBER

#312011 · 49 32 17 · CO M35 Y65 K81

Text, headings, rules, fields, logo. From the deep oak fields on kemberfloors.com.



OAK WHITE

#F6F1E9 · 246 241 233 · CO M2 Y5 K4

Second field, editorial covers, callouts



WHITE

#FFFFFF · 255 255 255 · CO MO YO KO

Default field, reversed type and logo

UTILITY PALETTE · TABLES, CHARTS, ICONS AND DIAGRAMS ONLY



KEMBER SLATE

#8A8F94 · icons on Oak White, chart series two



UMBER 60 · 20 · 8

#837970 #D6D2CF #EFEDEC · axes, rules, row fills



AMERICAN OAK NEUTRALS

Sampled from Kember floors · chart and section fills

OVERLAY ONLY



BLACK

#000000 · photo overlay at 30–45 %; never text

Retired for New Zealand material: Kember Blue #2E90D0 (3.5 : 1 on white; reads as technology, not timber), and the navy and grey of the current site. Blue remains only as the link colour on kemberfloors.com until that site is updated.

Graphic devices


The Frevini set, plus one Kember information device

Request samples →

Text CTA: DM Sans Medium, trailing arrow, 1 pt umber rule the width of the label. Section rule 0.5 pt Umber 20; table rules 0.75 / 0.35 pt. Horizontal only; no boxes or borders.



Icons: 24-unit grid, 1.5 stroke, round joins, no fill. Slate on Oak White, umber on white, white on umber. 12–16 mm; four per page at most; never as bullets.



The section device: three bands in 4 : 11 : 4, core grain perpendicular, 0.75 pt umber. Engineering and product material only; once per face, ≤ 40 mm. Never a pattern, background or logo element.

The Frevini system, unchanged.

Marcellus sets the hierarchy, DM Sans carries the rest, and neither is set bold in the standard hierarchy. The grid, margins and spacing are the Frevini values exactly. Shared typography is deliberate: it is what makes the two brands read as one standard.

Display Marcellus 48 pt · slide 66

Oak

H1 Marcellus 30 pt · slide 44

Engineered for stability.

H2 Marcellus 20 pt · slide 30

Three-ply construction

H3 DM Sans 13 pt · slide 20

Wall + ceiling lining

Eyebrow DM Sans Medium 7.5 pt · +0.14 em

AVAILABLE IN NEW ZEALAND

Body large 12 pt · Body 9.5 pt · slide 20 / 16

A 4 mm American oak wear layer over an 11 mm two-directional hardwood core, balanced by a 4 mm hardwood base. Installed like a 19 mm solid floor.

Caption 8 pt · Technical 7 pt · +0.02 em

Live sawn oak. Kember reference project.

Wear layer 4 mm · core 11 mm · balancing layer 4 mm · hardwax oil finish

CTA DM Sans Medium 9.5 pt · 1 pt rule

[Request samples →](#)

Quotation 18 pt · Key number 36 pt

19


Total thickness, mm

3

Hardwood plies

Fallbacks: Marcellus → Palatino Linotype, Book Antiqua, Georgia. DM Sans → Aptos, Segoe UI, Helvetica Neue, Arial. Montserrat, the current kemberfloors.com face, is not used. Metric first; imperial in brackets on first mention in technical documents.

A4 PORTRAIT · 210 × 297 MM

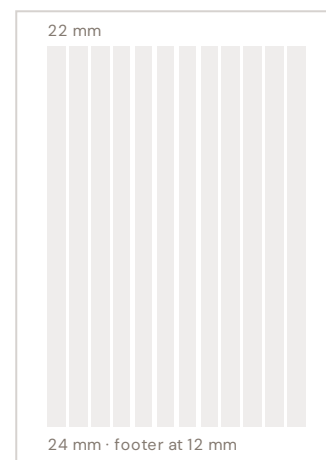


Margins 22 · 20 · 24 · 20 mm · 12 columns · 4 mm gutters

Body within 8 columns · text + image 5 + 7 · sidebar 3 + 9

Footer: "Document title · Kember Interiors" left, page number right

PRESENTATION 16 : 9 · 1920 × 1080 PX

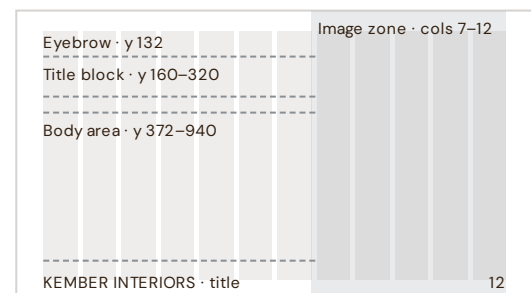

Safe margins 72 px top and bottom, 96 px sides · 24 px gutters

Logo 210 px, top-left, on title and closing slides only

Spacing XS-XXL: 2 · 4 · 8 · 12 · 24 · 40 mm; ×2 px web, ×4 px slide

Posters: 5 % margins, 6 columns, logo 12 % of the short edge

Oak does the work.

Frevini's photographic discipline applied to Kember's subjects: the space, the oak, the construction, the making, the application.



American oak, live sawn

ARCHITECTURE

The finished space with the oak floor as the subject; natural light, level horizontals, joinery as scale.

TEXT ON IMAGERY

White Marcellus over a black overlay at 30–45 % or a bottom-up gradient, bottom-left at the margin.


NOT THIS

The blue-graded, render-like hero imagery on the current site: cool cast, artificial light, no material.



MATERIAL

Northern oak as it arrives: log ends, bark, sawn character. Tight crop, one plane in focus.




ENGINEERING

The section device stands in where no photograph of the construction exists.



MAKING

The mill and log yard, documentary and unstaged. Overcast light is welcome; no grading.



APPLICATION

Floor, wall and ceiling in use. One application per image; the material continuous.

PRINCIPLES

- Natural, directional light; warm-neutral balance; restrained saturation. Colour from the oak, not the grade.
- Level horizontals; one quiet edge for type; square corners; full bleed or on column edges.
- One hero per page; support images at column width; one application per image; never a collage.

DO NOT USE

- Blue grading, HDR, filters, brown-tinted overlays, generic luxury-house imagery, stock lifestyle photography.
- Rounded image cards, circular buttons, quote-mark glyphs and photo-filled display type as on the current site.
- Renders presented as photographs; collages; drop shadows; decorative shapes.

Images on this page are reference captures from kemberfloors.com; the log yard is the one Kember-made photograph among them and sets the standard for the commission. A Kember photography commission in the five categories, at 300 ppi for print, is required before production collateral.

The same architecture.

COVERS






Image-led. Full bleed + overlay, white lock-up top-left, title block bottom-left.



Editorial. Oak White field, title at 40 %, optional image lower right or a band at the foot.




Technical. White, document code top-right, key-value block, the section device once.




Closing / contact. Umber field, white lock-up, HI, contact block bottom-left.


INTERNAL PAGES



Section opener. HI at 30 %, one paragraph, one image off the foot.



Product. 5 + 7: availability eyebrow, name, key-value specs; image bleeding three edges.

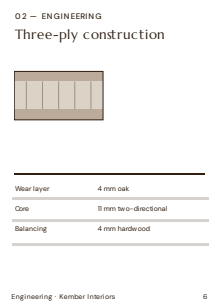


Engineering. The section device at the top, a specification list beneath, XL between blocks.




Quote / statement. Oak White, Marcellus in columns 2–10. Nothing else.


PRESENTATION SLIDES · 16 : 9

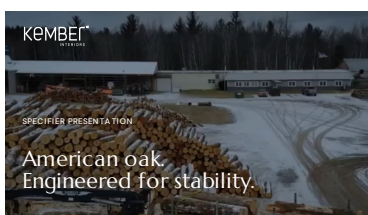

Title. Image-led or umber. Lock-up top-left; title block bottom-left.



Engineering. Section device left, material right. One idea.



Comparison / data. One chart, values labelled directly, series in order: umber, slate, oak.

Section divider, statement, text + image, product and closing slides follow the Frevini archetypes exactly, with the lock-up on title and closing slides only. Posters: hero statement, image over 55 percent, lock-up at 12 percent of the short edge, one CTA. Product launch, colour launch, engineering proposition and specifier posters differ only in which image and statement lead.

Specified, not sold.

A working philosophy for the specifier market. This page governs how product and technical information is presented; approved Kember documentation governs every claim.

PRODUCT ARCHITECTURE

LEVEL	NAME AND STATUS
Brand	Kember Interiors
Category	Flooring AVAILABLE IN NEW ZEALAND
Product	To be confirmed: E3plank or PrimeOak Flooring, and PrimeOak's relationship to Kember
Category	Wall + Ceiling AVAILABLE IN NEW ZEALAND
Product	American oak lining; New Zealand specification to be confirmed
Category	Interior doors · Cabinetry · other Kember lines KEMBER CAPABILITY

Capability is never presented as stock. Categories are added as rows; the architecture is completed by the positioning work, not by this guide.


Product information system

FIELD	WHAT IT HOLDS
Product	Name as approved documentation writes it; range and brand relationship
Application	Floor, wall, ceiling, joinery, component; use where documented
Construction	Layers, species, core; section device at true proportions
Dimensions	Thickness, width, length; metric first, imperial in brackets
Finish	Type and sheen as documented; no adjectives
Compliance	Certification, emissions, tests with the standard named; else blank
Warranty	Term, scope, conditions per the warranty document
Availability	AVAILABLE IN NEW ZEALAND or KEMBER CAPABILITY

Every product sheet, datasheet, specification sheet and product slide carries these eight fields in this order. A field with no approved value is left blank.

ILLUSTRATIVE EXAMPLE · NOT PRODUCT DATA

Product	[Product name], [range]
Application	Floor · residential and commercial
Construction	Three-ply engineered oak; see section
Dimensions	[t] mm · [w] mm · [l] mm
Finish	[Finish type]
Compliance	[Standard and result, or blank]
Warranty	[Term and scope], per warranty document
Availability	AVAILABLE IN NEW ZEALAND

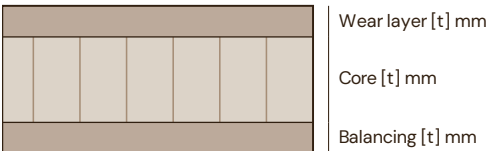

Section device at the product's true proportions; labels in millimetres frc

RULE

Brand guidelines govern presentation. Approved product documentation governs technical claims. Where the two disagree, the documentation wins and the guide is corrected.

Product information shown in this guide demonstrates information hierarchy and layout. Current technical data must always be sourced from the applicable Kember technical documentation.

The Kember test.

Voice

Short, exact, unhurried. A statement of three to six words, then a sentence of measurable proof. American facts in New Zealand English: metric, sentence case, no exclamation marks, no “transform your living space”.

DO	DON'T
American oak. Engineered for stability.	Transform your living spaces with exceptional quality!
Three plies, all hardwood. A 4 mm wear layer over an 11 mm two-directional core.	Superior strength and durability for modern living.
Installed like a 19 mm solid floor. Less seasonal gapping.	Your floors stay gorgeous for years.
Hardwax oil finish. Lifetime warranty, maintained.	Industry-leading, all-wood, lifetime peace of mind.
Request samples →	VIEW MORE →

PRINCIPLES

- Say it short. Specific beats superlative. Design and engineering in one breath.
- Assured, not salesy. New Zealand English, metric first. Address the specifier as a peer.
- Say what Kember says. Where Kember publishes no figure, say nothing.

BEFORE ISSUE

Any “no” sends it back. Then hide the lock-up: is it still Kember, and not Frevini?

1 Does it use the approved typography hierarchy: Marcellus sets it, DM Sans carries it, Medium for emphasis?

2 Is whitespace structural — about forty percent open in editorial and presentation layouts, generous on technical pages?

3 Is the palette umber, Oak White and white, with Slate at most once and no blue?

4 Is oak, in photograph or section, doing the visual work?

5 Is the hierarchy immediate: one eyebrow, one heading, one idea?

6 Have boxes, shadows, gradients, rounded cards and circular buttons been removed?

7 Is the language specific, with a number where a claim is made?

8 Is technical content set with the same care as marketing content, and labelled available or capability?

9 Does it meet the Frevini standard without being mistaken for Frevini?

10 With the lock-up hidden, is it still a serious architectural material brand?

Tokens and sources.

TOKEN REFERENCE

Umber · Oak White · Slate	#312011 · #F6F1E9 · #8A8F94
Umber tints · oak neutrals	#837970 #D6D2CF #EFEDEC · #DCD3C8 #BCAA9B #A68E77 #887057 #46382E
Type	Marcellus 400 · DM Sans 300/400/500 (as Frevini)
A4 scale, pt	48 · 30 · 20 · 13 · 12 · 9.5 · 8 · 7 (eyebrow 7.5 +0.14 em)
Slide scale, pt	66 · 44 · 30 · 20 · 20 · 16 · 11 · 10 (eyebrow 11)
A4 margins · slide safe area	22 · 20 · 24 · 20 mm · 72 · 96 · 72 · 96 px
Spacing · rules · icons	2 · 4 · 8 · 12 · 24 · 40 mm · CTA 1 pt, section 0.5, table 0.75 / 0.35 · 24 grid, 1.5 stroke
Lock-up	min 30 mm / 130 px · clear space ½ wordmark height · cover 44 mm · slide 210 px
Section device	4 : 11 : 4 · 0.75 pt umber · ≤ 40 mm · once per face
Provenance	Kember facts A/B from kemberfloors.com as indexed and captured · system C from Frevini · adaptations D · site CSS and logo master not verified

UNRESOLVED SOURCES

- Positioning: the New Zealand positioning and product-architecture work is not complete. “American oak. Engineered for stability.” is a working expression until it is.
- Flooring product identity: E3plank or PrimeOak Flooring, and whether PrimeOak is a Kember-branded product, a manufacturer brand distributed by Kember, or a range within Kember. This decides how PrimeOak, An Cuong, Masterpiece Series and Kember Interiors appear on collateral.
- Manufacturing origin: an Ontario facility, a Michigan listing and Vietnam import records all appear. No origin claim is made until Kember confirms.
- Construction, dimensions, finish, warranty term, certification and emissions for the New Zealand product are held in approved documentation only; the figures gathered from the site and retailer listings are recorded in the Markdown as references, not rules.
- Wall and ceiling lining specification for New Zealand is not yet defined.

FILES

- KEMBER_INTERIORS_BRAND_GUIDELINES.md · kember-design-tokens.json
- KEMBER_FREVINI_SYSTEM_MAPPING.md · assets/kember/

KEMBER[™]
INTERIORS

BRAND GUIDELINES · VERSION 1.1 · SEPTEMBER 2026

Talk to Kember.

[Request samples →](#)

New Zealand contact to be confirmed

[kemberfloors.com](#)

Built on the Frevini Studio design system, v1.1