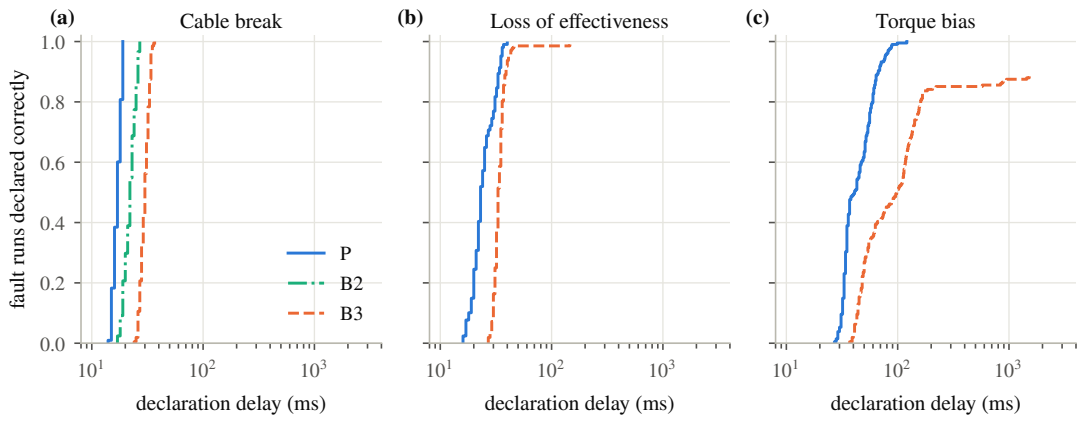
(a)
Cable break
(b)
Loss of effectiveness
(c)
Torque bias
fault runs declared correctly
1.0
0.8
0.6
0.4
0.2
0.0
P
B2
B3
10^1
10^2
10^3
declaration delay (ms)