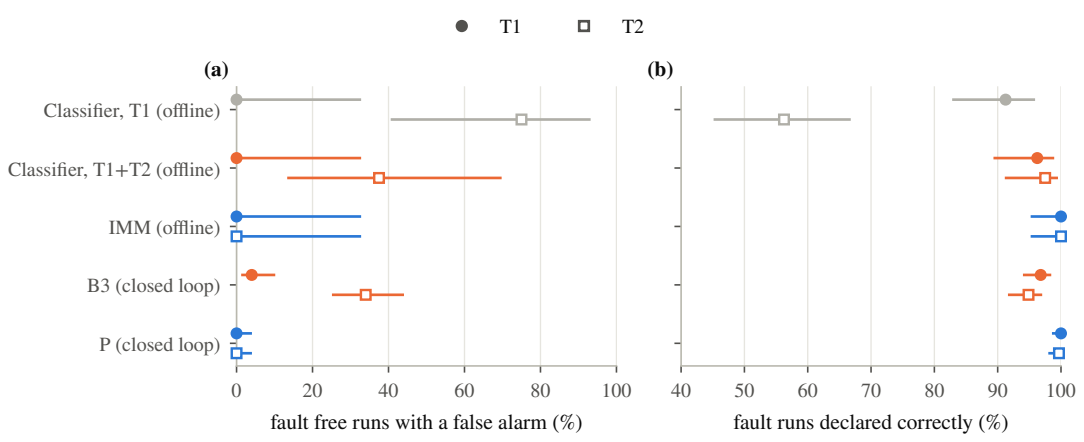
T1
T2
(a)
(b)
Classifier, T1 (offline)
Classifier, T1+T2 (offline)
IMM (offline)
B3 (closed loop)
P (closed loop)
0
20
40
60
80
100
40
50
60
70
80
90
100
fault free runs with a false alarm (%)
fault runs declared correctly (%)