ALD-200

Transmission Line Dehydrator

High-Performance Dry Air Management Solution for Telecommunications and Defense Applications



ALD-200i (Indoor Model)



ALD-200e (Outdoor Model)

Key Features

- Provides ultra-dry air with a dew point better than −40 °C (-40 °F)
- High-accuracy dew point measurement utilizing proprietary calibration algorithms
- Energy savings through intelligent pressure and purge control
- Ethernet-based remote monitoring and control
- Predictive maintenance and self-diagnostic capabilities
- Reliable operation in extreme environments from -40 °C to +55 °C (-40 °F to 131 °F)
- Patents Pending

Applications

- Cellular Base Stations
- Microwave Communication Systems
- Satellite Ground Stations and VSAT Systems
- Radar Systems
- Military Communications and Defense Equipment
- Broadcasting Transmission and RF Distribution Facilities

CE

Specifications

Dry Air Dew Point	< -40 °C (-40 °F)
Dry Air Flow Rate	2.0 L/min(Normal Operation), 1.6 L/min(Purging Operation)
Maximum Air Supply Pressure	0.3 psig
Overpressure auto-purge	0.5 psig
Dimensions (W x L x H)	Indoor: 482.6 x 308 x 88.4 mm (19.0 x 12.1 x 3.5 inch) Outdoor: 326 x 408 x 150 mm (12.8 x 16.1 x 5.9 inch)
Weight	Indoor: 9.4 kg Outdoor: 10.4 kg
Supply Power	100-240 VAC, 50/60 Hz
Power Consumption	20 W typical, 150 W max
Protocol	HTTPS / REST API
Alarm	The Dehydrator provides an Alarm List containing 23 alarm conditions, classified as Warning or Critical according to their severity.
Installation	Non-hazardous locations
Temperature	Storage: -40 °C to 60 °C (-40 °F to 140 °F) Operating: -40 °C to 55 °C (-40 °F to 131 °F)

Contact Us

Antenna Link

USA
- Texas: 990 Blue Mound E, Haslet, Texas 76052, USA
- California: 4685 Convoy St. #160, San Diego, CA 92111, USA

South Korea: 32-4, Techno 7-ro, Yuseong-gu, Daejeon, 34029 South Korea

TEL: +1 (972) 316-7722
Website: www.antennalink.com
Email: sales@antennalink.com
service@antennalink.com


@ 2026 Antenna Link. All rights reserved. Antenna Link and its logo are registered trademarks. This product and its related items are trademarks of Antenna Link. All other trademarks are the property of their respective owners.

ALD-200


Transmission Line Dehydrator

High-Performance Dry Air Management Solution for Telecommunications and Defense Applications

ALD-200i (Indoor Model)

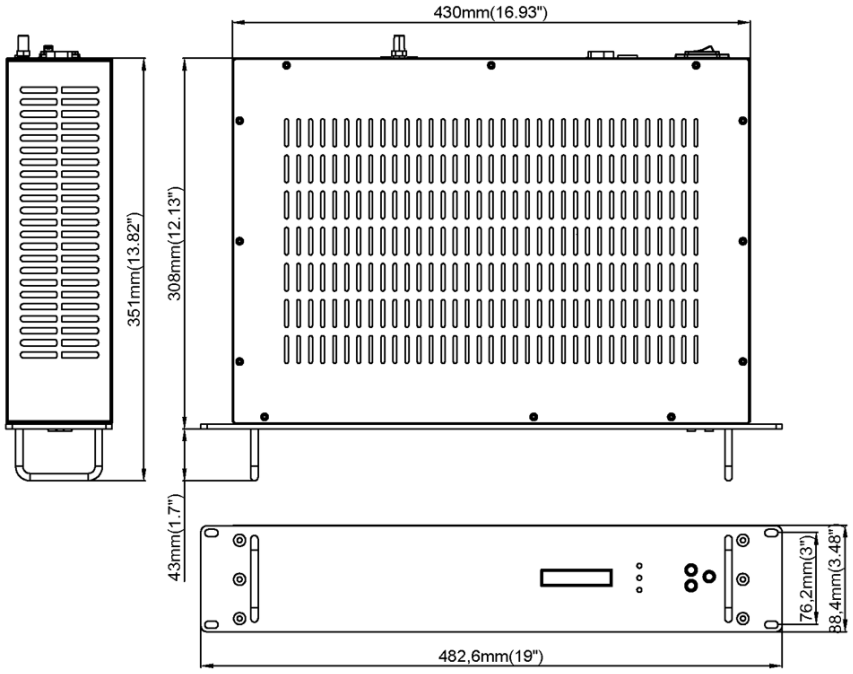

ALD-200e (Outdoor Model)

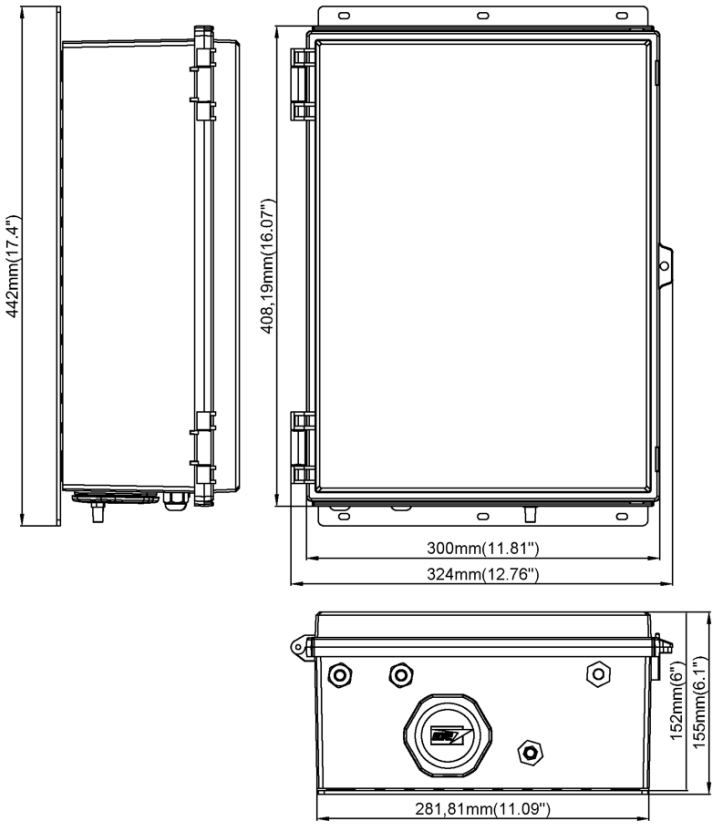

Contact Us

USA
Texas 990 Blue Mound E, Haslet, Texas 76052, USA
California 4685 Convoy St. #160, San Diego, CA 92111, USA
South Korea 32-4, Techno 7-ro, Yuseong-gu, Daejeon, 34029 South Korea

TEL +1 (972) 316-7722
Website www.antennalink.com
Email sales@antennalink.com
service@antennalink.com

@ 2026 Antenna Link. All rights reserved. Antenna Link and its logo are registered trademarks. This product and its related items are trademarks of Antenna Link. All other trademarks are the property of their respective owners.

ALD-200

Transmission Line Dehydrator

High-Performance Dry Air Management Solution for Telecommunications and Defense Applications

SCAN TO ACCESS

USER MANUAL | DATASHEET

Scan the QR code with your smartphone to access product documents and download the available files.

Also available at: https://antennalink.com/#resources

Contact Us

USA		TEL	+1 (972) 316-7722
Texas	990 Blue Mound E, Haslet, Texas 76052, USA	Website	www.antennalink.com
California	4685 Convoy St. #160, San Diego, CA 92111, USA	Email	sales@antennalink.com
South Korea	32-4, Techno 7-ro, Yuseong-gu, Daejeon, 34029 South Korea		service@antennalink.com

@ 2026 Antenna Link. All rights reserved. Antenna Link and its logo are registered trademarks. This product and its related items are trademarks of Antenna Link. All other trademarks are the property of their respective owners.