

TB Noise Remover

Version: 2.2.0 | Documentation date: 2026-08-04

Overview

Reduces specific recording problems such as hiss, hum, clicks, rumble, and clipped peaks.

What this plug-in solves

Dialogue, podcast, vocal, and field recordings may contain several different fault types at once. A single aggressive gate cannot distinguish steady ambience from hum, clicks, or clipping. TB Noise Remover provides a central cleanup amount and targeted switches so only the required restoration modules are engaged.

What you can expect

- Reduced environmental noise and room tone
- Targeted 50/60 Hz hum control
- Suppression of hiss, whine, clicks, and low rumble
- Optional repair of clipped events

How it works

TB Noise Remover separates common recording problems into dedicated repair sections instead of asking one broad process to solve everything. Hiss, electrical hum, digital whine, clicks, low rumble, and clipped peaks behave differently, so each section listens for a different pattern.


Enable only the section that matches the problem and raise its reduction until the unwanted sound becomes less distracting. Then back off enough to preserve breath, transients, room tone, and musical brightness. Several light repairs usually sound more natural than forcing one section to remove every trace of noise.

Quick start

- 1 Start with only Basic enabled.
- 2 Raise Reduction until steady noise is controlled without watery movement.
- 3 Enable one targeted module at a time.

- 4 Choose either 50 Hz or 60 Hz hum treatment based on the recording.
- 5 Check speech consonants, breaths, and musical transients.
- 6 Use Clip Repair only when clipped peaks are present.

Interface and key sections

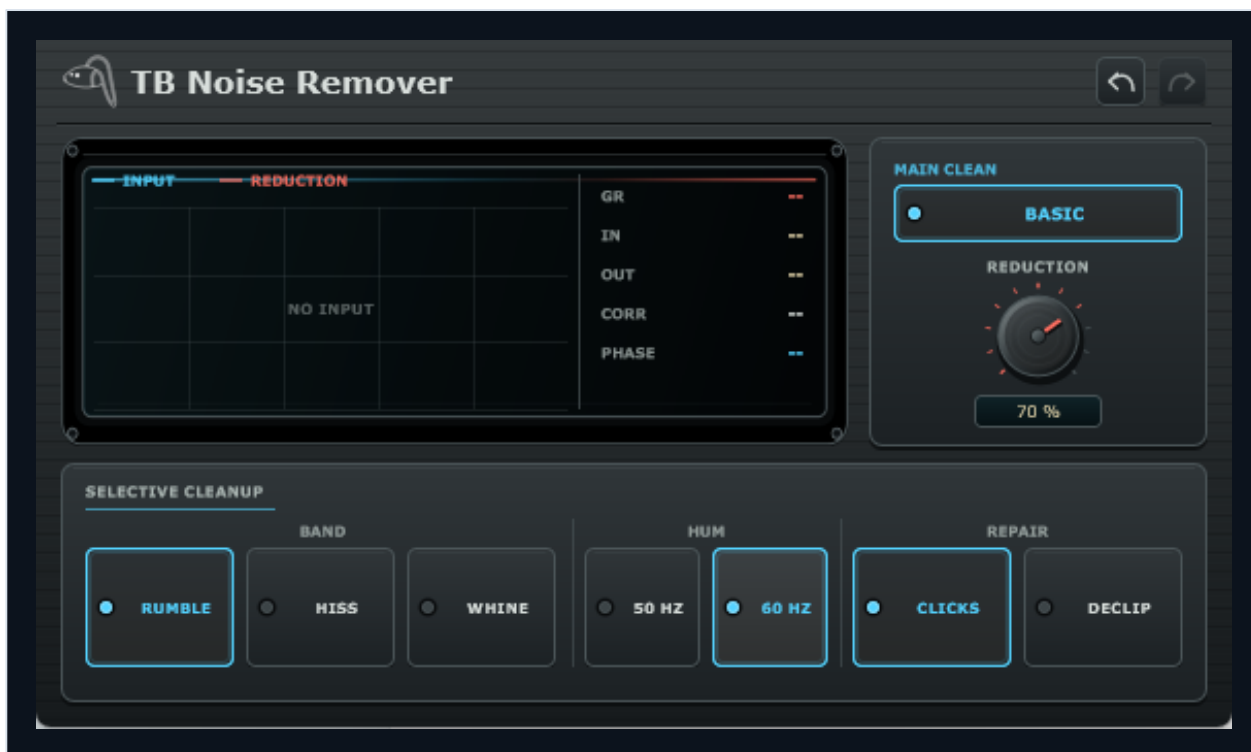

This is a direct capture of the current plug-in interface. Use the visible labels to locate the areas and controls explained below.

Basic and Reduction

Basic enables the primary broadband restoration path. Reduction moves from light natural cleanup toward stronger suppression. Increase it only until the noise is acceptably controlled.

Hiss

Targets broad high-frequency noise such as preamp hiss or air-system noise. Excessive use can dull consonants and cymbals.

50 Hz and 60 Hz Hum

Select the mains family that matches the recording. Do not enable both automatically; use the one that corresponds to the actual fundamental and harmonic pattern.

Digital Whine

Targets stable narrow electronic tones. Verify with headphones because musical sustained notes can resemble a whine.

Clicks

Detects and softens isolated short impulses. Use on mouth clicks or digital ticks, then confirm that drum transients remain intact.

Low Rumble

Reduces very low mechanical, handling, or traffic energy. Check that bass fundamentals and voice weight are not unnecessarily removed.

Clip Repair

Attempts to reconstruct flattened or damaged peak shapes. It cannot recover information that was never recorded and should be evaluated event by event.

Controllable properties

The guide uses the names shown on the plug-in panel. Each explanation describes the audible result, a useful way to approach the control, and an important interaction to listen for.

Control	What it does and when to use it
50 Hz Hum	Reduces electrical hum based around 50 Hz. Move it gradually and listen for the point where the intended result becomes clear without introducing a new problem elsewhere.
60 Hz Hum	Reduces electrical hum based around 60 Hz. Move it gradually and listen for the point where the intended result becomes clear without introducing a new problem elsewhere.
Basic	Turns on the main broadband cleanup stage for general background noise. Move it gradually and listen for the point where the intended result becomes clear without introducing a new problem elsewhere.
Bypass	Turns the complete effect off or on for a direct before-and-after comparison. Compare with bypass at a similar loudness. If the effect creates a tail, let that tail settle before judging the difference.
Clicks	Reduces short clicks, pops, and small impulse noises. Move it gradually and listen for the point where the intended result becomes clear without introducing a new problem elsewhere.
Clip Repair	Softens the harsh flat peaks created by an overloaded recording. Move it gradually and listen for the point where the intended result becomes clear without introducing a new problem elsewhere.
Digital Whine	Reduces narrow electronic tones and high-pitched digital whine. Move it gradually and listen for the point where the intended result becomes clear without introducing a new problem elsewhere.
Hiss	Reduces steady high-frequency hiss from microphones, tape, or preamps. Move it gradually and listen for the point where the intended result becomes clear without introducing a new problem elsewhere.
Low Rumble	Reduces deep vibration, handling noise, and low-frequency rumble. Move it gradually and listen for the point where the intended result becomes clear without introducing a new problem elsewhere.

Control	What it does and when to use it
Reduction	Sets the overall strength of the enabled cleanup modules. Raise it until the contribution is obvious, then reduce it slightly and recheck the sound in the complete mix.

Practical uses

Podcast cleanup

- Enable Basic and use moderate Reduction.
- Add Hiss if the preamp noise remains.
- Add 50 or 60 Hz Hum only when audible.
- Check breaths and S sounds in bypass comparison.

Expected result: Speech becomes clearer while natural room and articulation remain believable.

Field recording repair

- Start with Low Rumble for handling or traffic energy.
- Use Digital Whine for a stable electronic tone.
- Enable Clicks only if impulses remain.
- Use several moderate stages instead of maximum Reduction.

Expected result: Multiple fault types are reduced without forcing one algorithm to solve everything.

Common pitfalls

Restoration is subtractive and cannot recreate fully masked detail. Enable only the repair section that matches the problem and use the smallest amount that makes the noise less distracting without removing useful detail.

Heavy processing can create watery or gated artifacts. Enable only the repair section that matches the problem and use the smallest amount that makes the noise less distracting without removing useful detail.

Always preserve the original recording. Return the strongest control toward neutral, compare with bypass at a similar loudness, and add the processing back one section at a time.