Moving away from one obstacle while entering another obstacle's guard

DoN 0.85 | actual recorded geometry | all 50 trials per controller

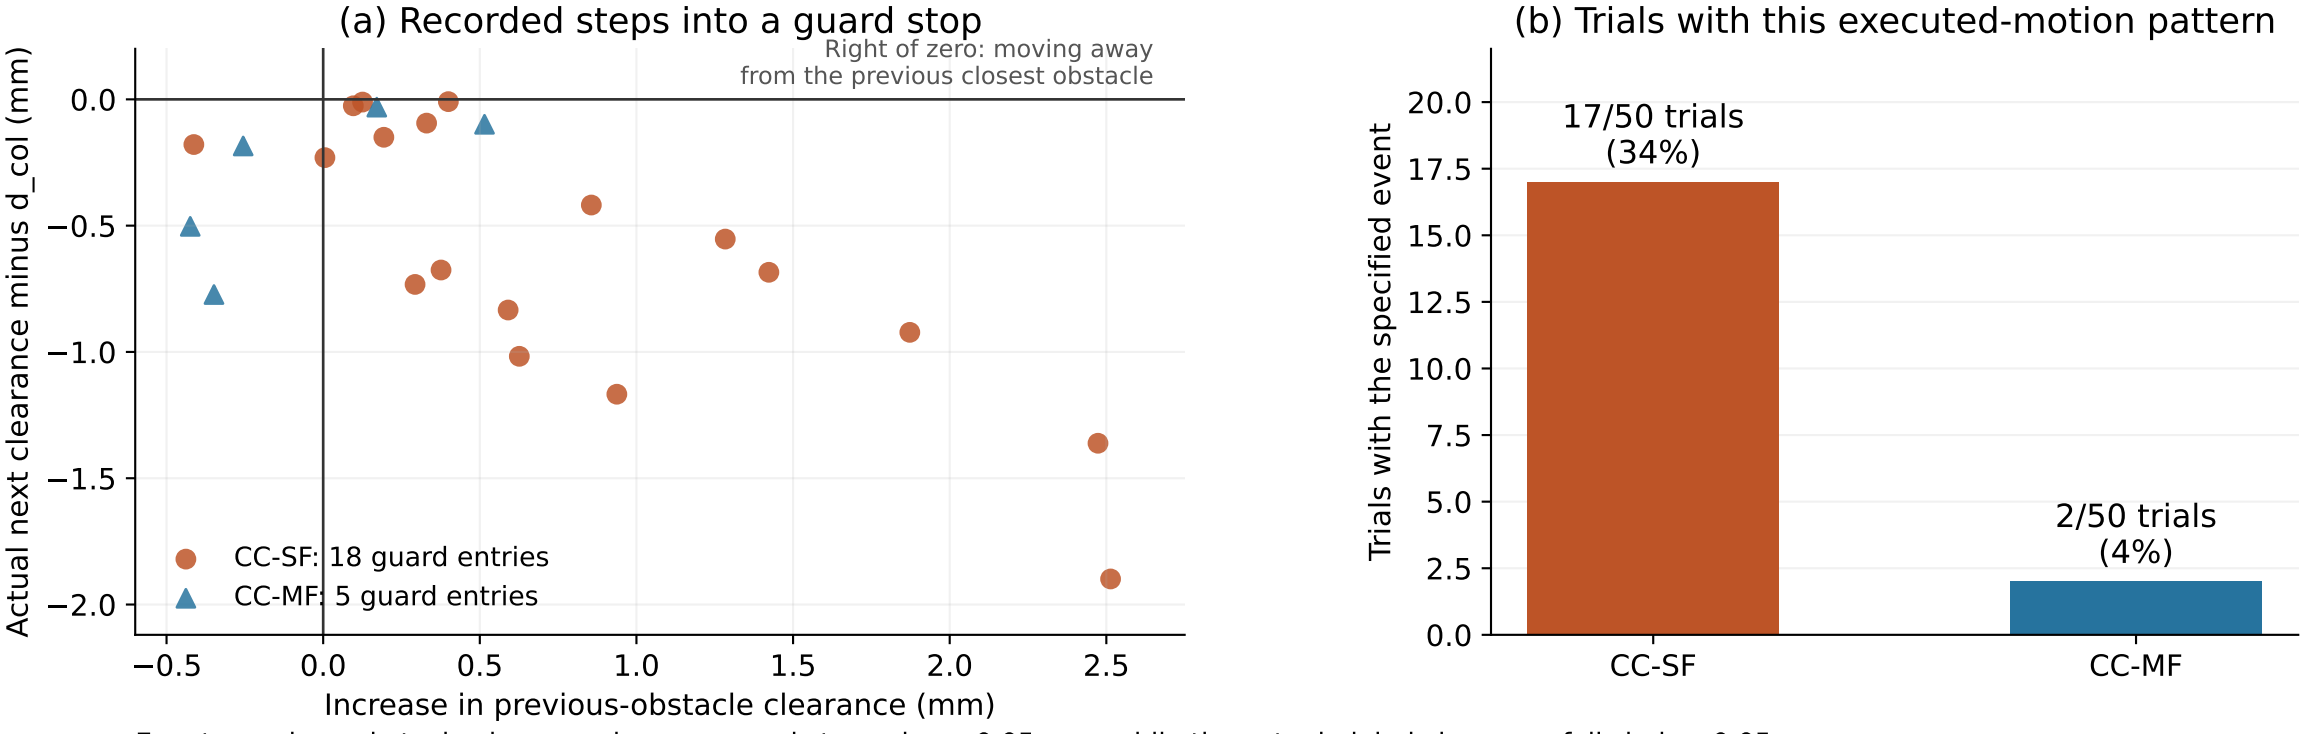

Event: previous-obstacle clearance increases and stays above 0.05 mm, while the actual global clearance falls below 0.05 mm.

The full normal-step scan contains 17,745 SF steps and 25,907 MF steps. Every observed guard entry is terminal in these runs.

This measures executed motion relative to the current nearest obstacle; it does not reconstruct the optimizer's future-stage feature choice.