



BKB®

Güneş enerjisi sistemleri



sınırsız enerji






DOUBLE -SIDED GLASS SOLAR LED WALKWAY LIGHT

Modern Design ·Double sided glass solar panel

Aluminum alloy case , never fade
Double-sided glass solar panel
for fast charging



• **SGL-08**

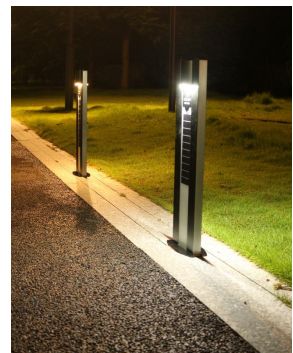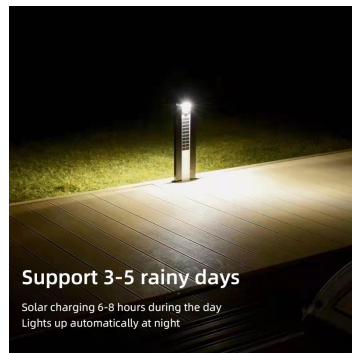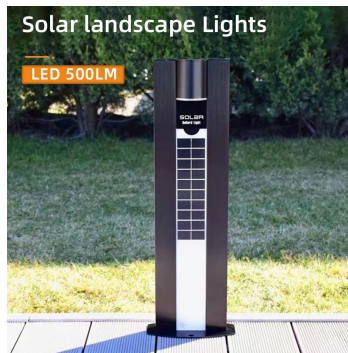

Specifications

Model	SGL-08
LED	500lumens
Battery type	Rechargeable Li-ion battery
Solar panel	6W Double sided glass solar panel
CCT	White 6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Steady light at night
Material	Aluminum alloy case +ABS +PC
Size	200*100*610mm (Other Height can be customized)
Working Temperature	-25°C to 65°C IP65
Installation	60cm
Application	Street , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt , parking lot , tennis court .




SOLAR POST CAP LED LIGHT LANDSCAPE LIGHTING

Modern Design ·

High-End design of PC material
Long working time , Eye protection

Lighting illumination with landscape

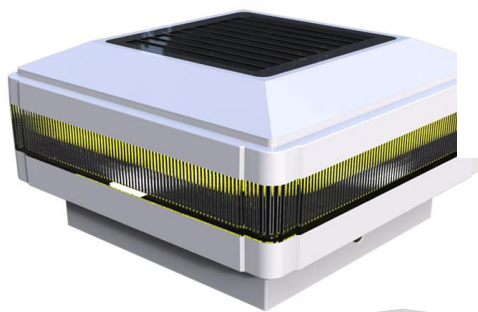

• SGL-03



Specifications

Model	SGL-03
LED	500lumens with landscape light
Battery type	Rechargeable Li-ion battery
Solar panel	1.2W solar panel
CCT	White 6000-6500K Warm white 3000-3500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Steady light at night
Material	ABS +PC
Size	L132*W132*H72mm
Working Temperature	-25°C to 65°C IP65
Installation Post size	All different size post cap can be suitable
Application	Street , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .




SOLAR WALL LED LIGHT

Microwave Sensor (PIR Sensor)

Aluminum Alloy Case ,
Oxidation Technology
High Lumens LEDs



• SWL-12



Specifications

Model	SWL-12
LED	1000lumens
Battery type	Rechargeable Li-ion battery
Solar panel	4W High efficiency solar panel
CCT	6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Microwave sensor working (PIR Working options)
Material	Aluminum Alloy case +PC lens
Size	300*117*56MM
Working Temperature	-25°C to 65°C IP65
Installation height	2.5-3M , wall mounted or pole mounted
Application	Wall , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , door plate .



Solar Pendant Lights

WITH REMOTE



ABS case
Long working time



• SHL-04RC



• SHL-04L



Specifications

Model	SHL-04RC	SHL-04L
LED	2000LM 60PCS +50000H	
Battery type	Rechargeable Li-ion battery	
Solar panel	5W 17% efficiency solar panel	3W 17% efficiency solar pane
Solar charging time	6-8hrs by bright sunlight	
Lighting Mode	Steady light	
Material	ABS +PC	
Working Temperature	-25°C to 65°C IP65	
Size	168*142*28MM	
Application	Greenhouse vegetable base, vine frame, terrace, interior decoration lighting, outdoor lighting, garden lighting, bar, bistro, etc	



Solar Wall Light

Modern Design ·

External lighting - Photo Sensor + PIR

High-End design of PC material
Long working time , Eye protection



• ES-3M100



• ES-3M200

Specifications

Model	ES-3M100
LED	100pcs/"2835"LED
Battery type	2PCS 3.7V/2200M=mAh lithium battery
Solar panel	5V/2.5W/Poly
CCT	White 6000K Warm 3000K
Solar charging time	6-8hrs by bright sunlight
Sensor	Photo Sensor+ PIR
Material	ABS +PC
Size	L25.8*W14.6*H9.5CM
Working Time	8-12Hour IP65
Sensor Range	5-10m/120°
Lumen	500 Lux



Solar Wall Light

Modern Design ·

portable - solar power charge Sensor + PIR

Aluminum Alloy Case ,
Oxidation Technology
High Lumens LEDs



• ES-1M50

Specifications

Model	ES-1M50
LED	50pcs "2835" LED
Battery type	3.7V/1500mAh Lithium battery
Solar panel	5.5V/0.5W/Poly
CCT	6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Sensor	Photo Sensor+ PIR
Material	ABS+PS
Size	8.5*5.8*15.9CM
Working Time	8Hours
Sensor Range	3-5m/120°
Lumen	200 Lux