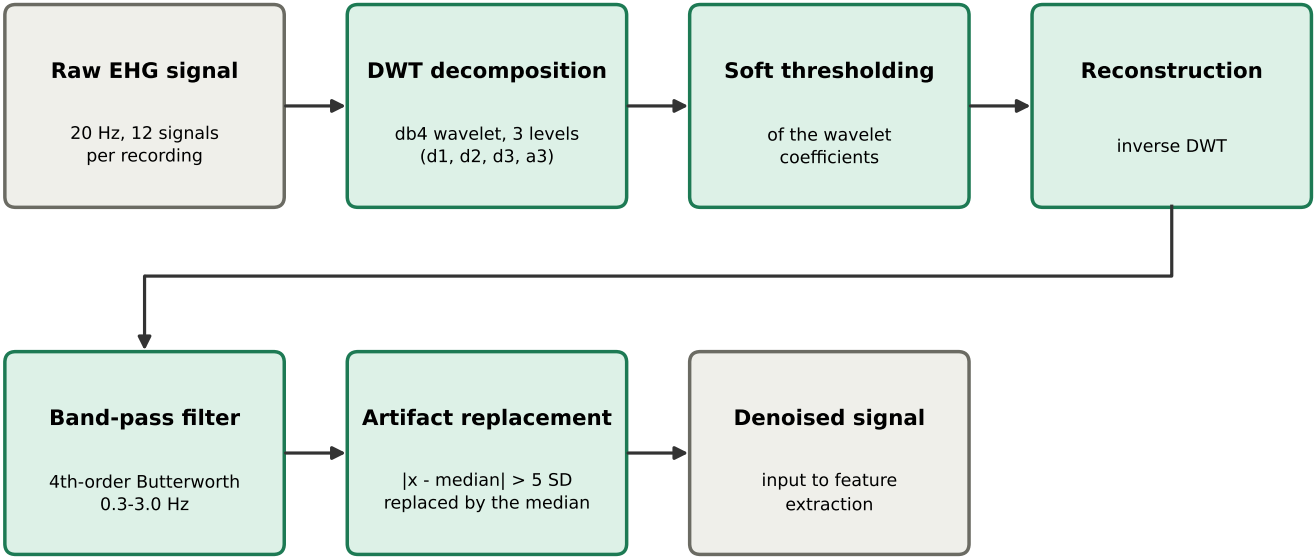
Raw EHG signal
20 Hz, 12 signals per recording
DWT decomposition
db4 wavelet, 3 levels (d1, d2, d3, a3)
Soft thresholding
of the wavelet coefficients
Reconstruction
inverse DWT
Band-pass filter
4th-order Butterworth 0.3-3.0 Hz
Artifact replacement
|x - median| > 5 SD replaced by the median
Denoised signal
input to feature extraction