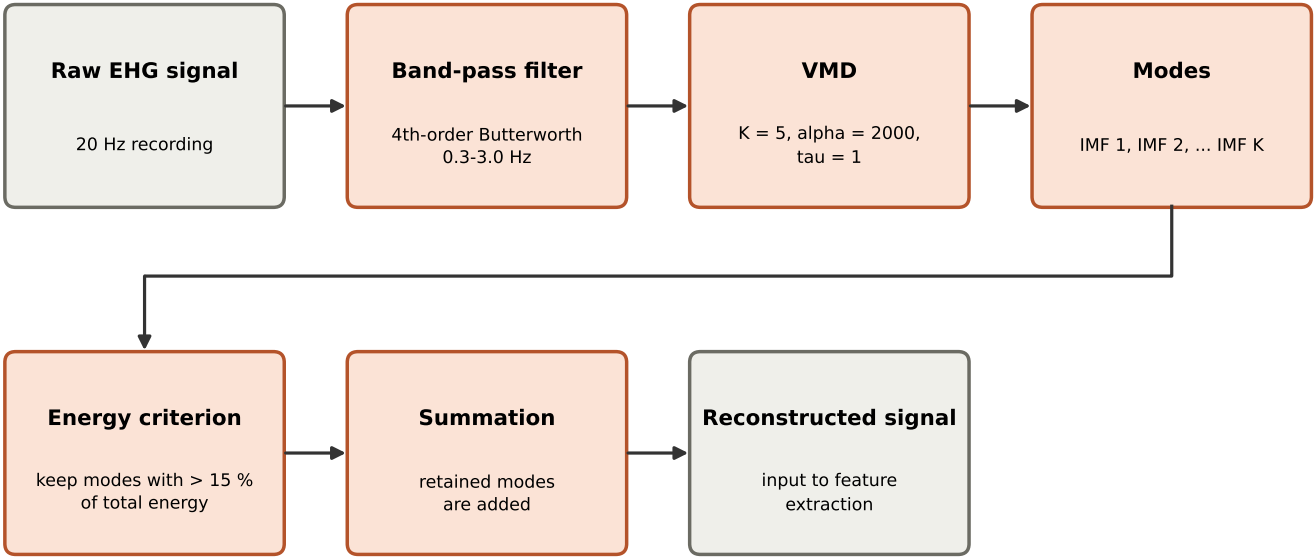
Raw EHG signal
20 Hz recording
Band-pass filter
4th-order Butterworth
0.3-3.0 Hz
VMD
K = 5, alpha = 2000,
tau = 1
Modes
IMF 1, IMF 2, ... IMF K
Energy criterion
keep modes with > 15 %
of total energy
Summation
retained modes
are added
Reconstructed signal
input to feature
extraction