

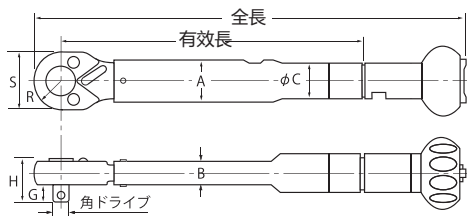



## 棘輪型扭力扳手

QLK

- 精度為 ±3% 以内。

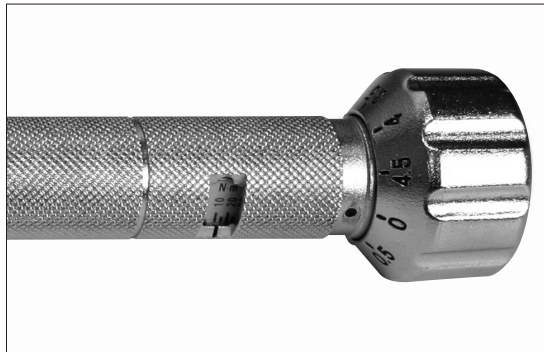

30~4200 QLK

5600 QLK

7000~21000 QLK

| 型 號      | 調整範圍           | 最小讀值      | 型 號        | 調整範圍        | 最小讀值    | 型 號       | 調整範圍     | 最小讀值 | 四角頭             | 全長    | 尺 寸 (mm) |     |      |      |      |      |      |      | 牌 價 |  |
|----------|----------------|-----------|------------|-------------|---------|-----------|----------|------|-----------------|-------|----------|-----|------|------|------|------|------|------|-----|--|
|          |                |           |            |             |         |           |          |      |                 |       | 頭 部      |     |      | 主 體  |      |      |      |      |     |  |
| 公 制      | kgf.cm / kgf.m |           | 牛 頓        | N.m         |         | 英 制       | lbf.in   |      |                 | mm    | H        | G   | R    | A    | B    | C    | D    |      |     |  |
| 30QLK    | 10-30kgf.cm    | 0.5kgf.cm | CN300QLK   | 100-300cN.m | 5cN.m   |           |          |      | 6.35<br>(1/4")  | 186   | 18.8     | 7.5 | 12   |      |      |      |      |      |     |  |
| 60QLK    | 20-60 "        | 1 "       | N6QLK      | 2-6 N.m     | 0.1 N.m |           |          |      |                 |       |          |     |      | 18.2 | 9.6  | 15   |      |      |     |  |
| 120QLK   | 40-120 "       | 2 "       | N12QLK     | 4-12 "      | 0.2 "   | PI120QLK  | 40-120   | 2    |                 |       |          |     |      |      |      |      |      |      |     |  |
| 230QLK   | 70-230 "       | 2 "       |            |             |         | PI230QLK  | 70-230   | 2    | 9.53<br>(3/8")  | 232   | 25       | 11  | 15.5 |      |      |      |      |      |     |  |
| 250QLK   | 50-250 "       | 2 "       | N25QLK     | 5-25 "      | 0.2 "   |           |          |      |                 | 232   |          |     |      |      |      |      |      |      |     |  |
| 450QLK   | 100-450 "      | 5 "       |            |             |         | PI450QLK  | 100-450  | 5    |                 | 253.5 |          |     |      |      | 16   | 25   | 11.4 | 20   |     |  |
| 500QLK   | 100-500 "      | 5 "       | N50QLK     | 10-50 "     | 0.5 "   |           |          |      |                 | 253.5 |          |     |      |      |      |      |      |      |     |  |
| 900QLK   | 200-900 "      | 10 "      | N90QLK     | 20-90 "     | 1 N.m   |           |          |      | 12.7<br>(1/2")  | 352   | 31       | 14  |      | 19.7 | 27.5 | 12.4 | 21.7 |      |     |  |
| 1000QLK  | 200-1000 "     | 10 "      | N100QLK    | 20-100 "    | 1 "     | PI1000QLK | 200-1000 | 10   |                 | 392   |          |     |      |      |      |      |      |      |     |  |
| 1400QLK  | 400-1400 "     | 10 "      | N140QLK    | 40-140 "    | 1 "     |           |          |      |                 | 478   | 33       |     |      | 23   | 34   |      |      |      |     |  |
| 1800QLK  | 400-1800 "     | 20 "      | N180QLK    | 40-180 "    | 2 "     |           |          |      |                 |       |          |     |      |      |      | 15.4 | 27.2 |      |     |  |
| 2000QLK  | 400-2000 "     | 20 "      | N200QLK    | 40-200 "    | 2 "     | PI2000QLK | 400-2000 | 20   | 19.05<br>(3/4") | 678   | 42       | 20  |      |      |      |      |      |      |     |  |
| 2800QLK  | 4-28kgf. m     | 0.2kgf.m  | N280QLK    | 40-280 "    | 2 "     |           |          |      |                 | 678   |          |     |      |      | 23.5 | 35   |      |      |     |  |
| 3600QLK  | 8-36 "         | 0.2 "     | N360QLK    | 80-360 "    | 2 "     |           |          |      |                 |       |          |     |      |      |      |      |      |      |     |  |
| 4200QLK  | 6-42 "         | 0.2 "     | N420QLK    | 60-420 "    | 2 "     |           |          |      |                 | 950   |          |     | 42.7 |      | 27   | 38   | 16   | 30   |     |  |
| 5600QLK  | 8-56 "         | 0.3 "     | N560QLK    | 80-560 "    | 3 "     |           |          |      |                 | 1195  | 49.5     | 34  |      | 43.5 | 18   | 34   |      |      |     |  |
| 7000QLK  | 10-70 "        | 0.5 "     | N700QLK    | 100-700 "   | 5 "     |           |          |      | 1314            |       |          |     |      | 46   | 19.2 | 35.4 | 27.2 |      |     |  |
| 8500QLK  | 10-85 "        | 0.5 "     | N850QLK    | 100-850 "   | 5 "     |           |          |      | 25.4<br>(1")    | 1388  | 58       | 27  |      | 38   | 54   | 23   | 42.7 | 31.8 |     |  |
| 10000QLK | 10-100 "       | 0.5 "     | N1000QLK-8 | 100-1000 "  | 5 "     |           |          |      |                 | 1538  |          |     |      |      |      |      |      |      |     |  |
| 14000QLK | 20-140 "       | 1 "       |            |             |         |           |          |      |                 | 1844  | 61       |     |      | 44   | 66   | 26   | 51   | 40   |     |  |
| 15000QLK | 20-150 "       | 1 "       | N1500QLK   | 200-1500 "  | 10 "    |           |          |      |                 | 2064  |          |     |      |      |      |      |      |      | 34  |  |
| 21000QLK | 70-210 "       | 1 "       | N2100QLK   | 700-2100 "  | 10 "    |           |          |      |                 |       |          |     |      |      |      |      |      |      |     |  |