
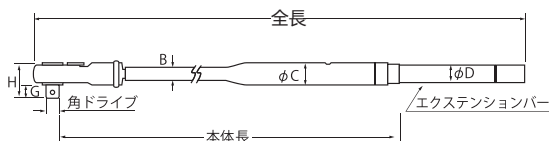
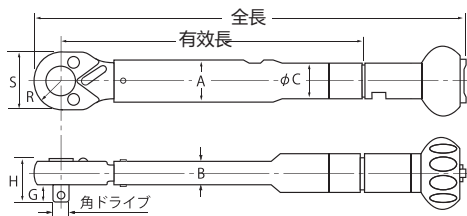



棘輪型扭力扳手

QLK

- 精度為 ±3% 以内。

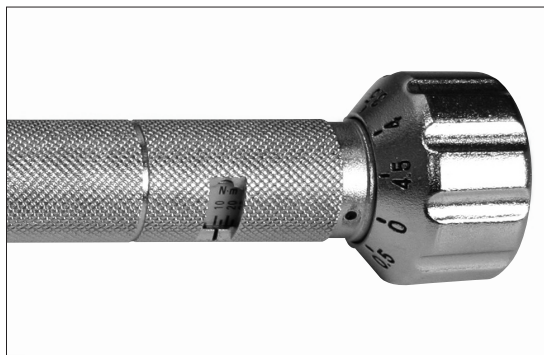

30~4200 QLK

5600 QLK

7000~21000 QLK

型 號	調 整 範 圍	最小讀值	型 號	調整範圍	最小讀值	型 號	調整範圍	最小讀值	四角頭	全 長	尺 寸 (mm)								牌 價	
											頭 部			主 體						
公 制	kgf.cm / kgf.m		牛 頓	N.m		英 制	lbf.in			mm	H	G	R	A	B	C	D			
30QLK	10-30kgf.cm	0.5kgf.cm	CN300QLK	100-300cN.m	5cN.m				6.35 (1/4")	186	18.8	7.5	12							
60QLK	20-60 "	1 "	N6QLK	2-6 N.m	0.1 N.m									18.2	9.6	15				
120QLK	40-120 "	2 "	N12QLK	4-12 "	0.2 "	PI120QLK	40-120	2												
230QLK	70-230 "	2 "				PI230QLK	70-230	2	9.53 (3/8")	232	25	11	15.5							
250QLK	50-250 "	2 "	N25QLK	5-25 "	0.2 "					232										
450QLK	100-450 "	5 "				PI450QLK	100-450	5		253.5			16	25	11.4	20				
500QLK	100-500 "	5 "	N50QLK	10-50 "	0.5 "				12.7 (1/2")	253.5	31	14								
900QLK	200-900 "	10 "	N90QLK	20-90 "	1 N.m					352			19.7	27.5	12.4	21.7				
1000QLK	200-1000 "	10 "	N100QLK	20-100 "	1 "	PI1000QLK	200-1000	10		392										
1400QLK	400-1400 "	10 "	N140QLK	40-140 "	1 "				19.05 (3/4")	478	33	20	23	34						
1800QLK	400-1800 "	20 "	N180QLK	40-180 "	2 "															
2000QLK	400-2000 "	20 "	N200QLK	40-200 "	2 "	PI2000QLK	400-2000	20								15.4	27.2			
2800QLK	4-28kgf. m	0.2kgf.m	N280QLK	40-280 "	2 "				25.4 (1")	678	42	27	23.5	35						
3600QLK	8-36 "	0.2 "	N360QLK	80-360 "	2 "					678										
4200QLK	6-42 "	0.2 "	N420QLK	60-420 "	2 "					950			42.7	34	27	38	16	30		
5600QLK	8-56 "	0.3 "	N560QLK	80-560 "	3 "				25.4 (1")	1195	49.5	27		43.5	18	34				
7000QLK	10-70 "	0.5 "	N700QLK	100-700 "	5 "					1314					46	19.2	35.4	27.2		
8500QLK	10-85 "	0.5 "	N850QLK	100-850 "	5 "															
10000QLK	10-100 "	0.5 "	N1000QLK-8	100-1000 "	5 "				25.4 (1")	1388	58	27	38	54	23	42.7	31.8			
14000QLK	20-140 "	1 "								1538										
15000QLK	20-150 "	1 "	N1500QLK	200-1500 "	10 "					1844			61		44	66	26	51	40	
21000QLK	70-210 "	1 "	N2100QLK	700-2100 "	10 "					2064							34			