

PVC Coated Sheet Metal


Heat-weldable fabrication sheet for flashings and perimeter edge details

PRODUCT OVERVIEW

A galvanized sheet with laminated PVC film that can be formed into compatible flashing and edge components for DeckRite PVC membrane systems.

PRODUCT DESCRIPTION

DeckRite PVC coated sheet metal is designed for roofing, decking and sheet-metal professionals. It is commonly fabricated into flashings and perimeter edge details for PVC-based single-ply roofing and decking membranes.

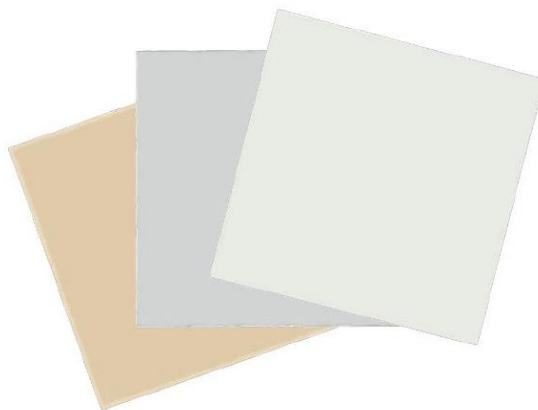

PRODUCT CONSTRUCTION

A 4 ft x 10 ft sheet of 24-gauge, hot-dipped galvanized Grade 90 steel with laminated 20-mil PVC film on one side.

The coated face provides a compatible surface for hot-air welding DeckRite membrane into custom-fabricated details.

AVAILABLE COLORS

Gray	Tan	White
------	-----	-------

PRODUCT & PACKAGING DATA

PROPERTY	VALUE
Sheet size	4 ft x 10 ft
Total thickness	0.052 in. nominal
Sheets per pallet	25
Weight per sheet	45 lb
Weight per pallet	1,225 lb

APPLICATION / INSTALLATION

- Do not install PVC coated metal in direct contact with asphalt.
- Suitable for mechanically fastened and fully adhered PVC single-ply installations.
- Form the sheet into project-specific flashings or edge components, then hot-air weld the PVC membrane to the coated face.

STORAGE

Store indoors and out of direct sunlight. Store sheets flat and keep them clean and dry prior to installation.

PRECAUTIONS

- Wear appropriate personal protective equipment, including gloves and eye protection.

Follow current DeckRite installation requirements and applicable safety procedures for the project conditions