

PVC Coated Drip Edge

Heat-weldable perimeter edge accessory for DeckRite PVC membrane systems

PRODUCT OVERVIEW

A preformed galvanized-metal edge with laminated PVC film for flashing and perimeter details in roofing and decking applications.


PRODUCT DESCRIPTION

DeckRite PVC coated drip edge is designed for roofing, decking and sheet-metal professionals. It is used for flashing and perimeter edge details and integrates with PVC-based single-ply roofing and decking membranes.

PRODUCT CONSTRUCTION

Preformed 1-3/4 in. x 2 in. x 10 ft stick manufactured from 24-gauge, hot-dipped galvanized Grade 90 steel with a laminated 20-mil PVC film.

The PVC film creates a compatible surface for hot-air welding DeckRite membrane into the completed edge detail.

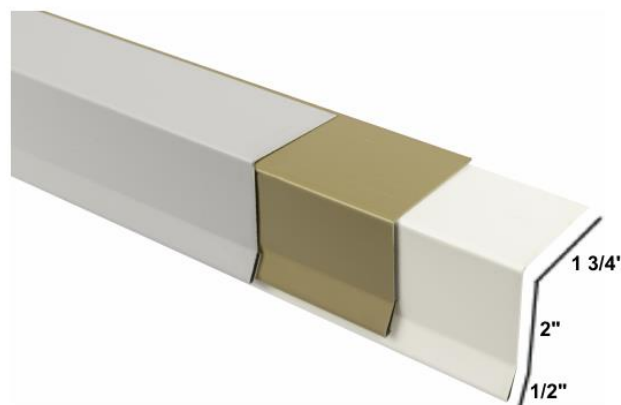

AVAILABLE COLORS

Gray	Tan	White
------	-----	-------

PRODUCT & PACKAGING DATA

PROPERTY	VALUE
Length / profile	1-3/4 in. x 2 in. x 10 ft
Total thickness	0.052 in.
Weight per 10-ft stick	5 lb
Shipping tube	6 in. x 6 in. x 10 ft
Shipping weight	40 lb per tube

STORAGE

Store indoors and out of direct sunlight. Keep the drip edge clean and dry before installation.

APPLICATION / INSTALLATION

- Do not install PVC coated drip edge in direct contact with asphalt.
- Suitable for mechanically fastened and fully adhered PVC single-ply installations.
- Hot-air weld the PVC membrane to the coated surface using approved welding procedures.

PRECAUTIONS

- Wear appropriate personal protective equipment, including gloves and eye protection.

Follow current DeckRite installation requirements and applicable safety procedures for the project conditions.