

ENGINEERED PERFORMANCE

DeckRite 500 & 600 Series

Three-ply reinforced vinyl membrane - available in 50 mil and 60 mil thicknesses.

AVAILABLE COLORS



Slate Gray
50/60 mil



Lakewood Marble
50 mil




Sahara Tan
50/60 mil



Tuscany Sand
50 mil



Tropical Cream
50 mil



Riverstone
60 mil



Gray Storm
50/60 mil



Harvest
60 mil

Color representations are approximate. Request physical samples before final selection.

PHYSICAL PROPERTY	UNIT	TEST	500	600
Width	inches	-	68"	68"
Length	yards	-	30 yds	30 yds
Thickness	mils	ASTM D751	50 (1.25 mm)	60 (1.5 mm)
Elongation at break - warp	%	ASTM D751	32	32
Elongation at break - fill	%	ASTM D751	38	38
Abrasion resistance Tabor cs10, 1000g, 1500 cycles	visual	-	Pass	Pass
Low-temp impact -22°F (-30°C)	-	ASTM D1790	Pass	Pass
UV exposure 5,000 hours	-	ASTM G53	No change	No change
Heat aging 7 days @ 158°F (70°C)	visual	ASTM D751	No change	No change
Dimensional stability	%	CAN/CGSB 37.54-94	-	Machine -0.08% Cross -0.14%

Special-order colors may be available.
Fade resistant: no appreciable color change after accelerated exposure of 5,000 hours using a Weatherometer and/or fade meter.

This information is intended as a general specification guideline. Properties may vary or change without notice.
*As with most exterior materials, colors may change with time; consult warranty details. 1 mil = 0.001 inch.

WARRANTY & SERVICE

DeckRite offers a 7-year limited warranty for 50 mil and a 10-year limited warranty for 60 mil against manufacturing defects. Consult the current DeckRite warranty for complete terms and conditions. Our customer service team shares one commitment: helping customers complete successful projects.



Request samples. Find a distributor. Plan your project.

DeckRite support can help connect homeowners, contractors and property managers with product information, installation resources and distributors.



SCAN FOR TECHNICAL DATA

Installation instructions, technical bulletins, standard details and product data.

www.DeckRite.com

888.450.DECK (3325)

501.945.1919

DeckRiteSupport@DeckRite.com

Send orders/Freight Quote Req./PO's to: Orders@DeckRite.com

3912 E. Progress St.
North Little Rock, AR 72114

 DeckRite LLC

 @deckritellc



DeckRite

INNOVATIVE DECKING SOLUTIONS



WATERPROOF DECKING.

FINISHED FOR LIVING.

A durable, slip-resistant vinyl membrane that combines the waterproofing surface and walking surface in one clean system.

DECKS • BALCONIES • WALKWAYS • ROOFTOPS • DOCKS

ONE SURFACE. TWO JOBS.



CHOICE

DeckRite is a durable, low-maintenance flexible vinyl covering for wood or concrete decks, patios, balconies, breezeways and exterior walkways. It is slip-resistant, mildew-resistant, waterproof and engineered for long-term performance in all climates.

VALUE

The membrane can be installed over living areas or on raised decks to help keep the space below dry. It is also well suited to multiple-deck applications on apartments, condominiums, retirement communities, hotels and other commercial properties.




WHY DECKRITE

- Enhances the look of exterior walkways and decks
- Eliminates yearly painting or staining of wood decks
- Can be applied to most properly prepared surfaces
- Durable and slip-resistant
- Easy to install and easy to keep clean

BUILT FOR THE OUTDOORS

REINFORCED THREE-PLY CONSTRUCTION

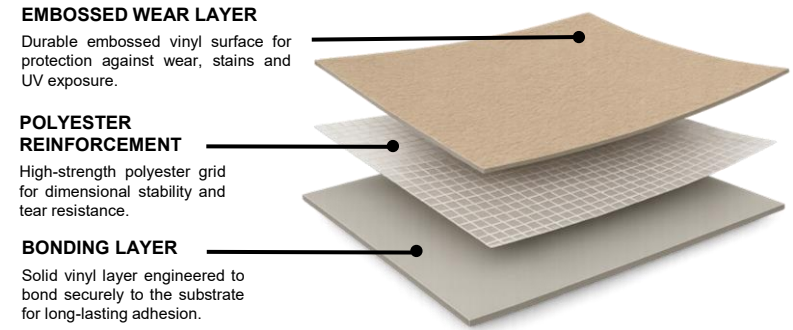

DeckRite is formulated to withstand exposure to sun, water, common household chemicals and foot traffic. The membrane's reinforced design is engineered for durability and longevity.



LOW-MAINTENANCE LIVING

Traditional wood decks require sanding, power washing, staining or sealing. With DeckRite, routine care is generally little more than an occasional spray from a garden hose and cleaning appropriate for the soil. The surface resists staining from most common household products.

- Waterproofing system
- Resists mildew, chemicals and ultraviolet rays
- Eliminates wood splinters and helps cover unsightly concrete spalling or cracking
- Complies with ADA requirements for slip resistance

INSTALLATION & SUPPORT



1 PREPARE

2 ADHERE

3 HOT-AIR WELD

A COMPLETE INSTALLATION SYSTEM

Installation is designed to be clean and efficient. DeckRite can recommend installers in many areas, and experienced general contractors can complete the process. Customer service can also guide do-it-yourselfers through product selection and installation resources.



SYSTEM COMPONENTS

- Water-based adhesive for wood; solvent-based adhesive for concrete or sealed wood
- Color-coordinated accessories.
- Hot-air welding guns available for rental or purchase
- Installation videos, written instructions and technical data available online



BEFORE



AFTER