GH4 COUPON / SUBMISSION CANDIDATE

Fabrication drawing - top view, all dimensions in mm; do not scale

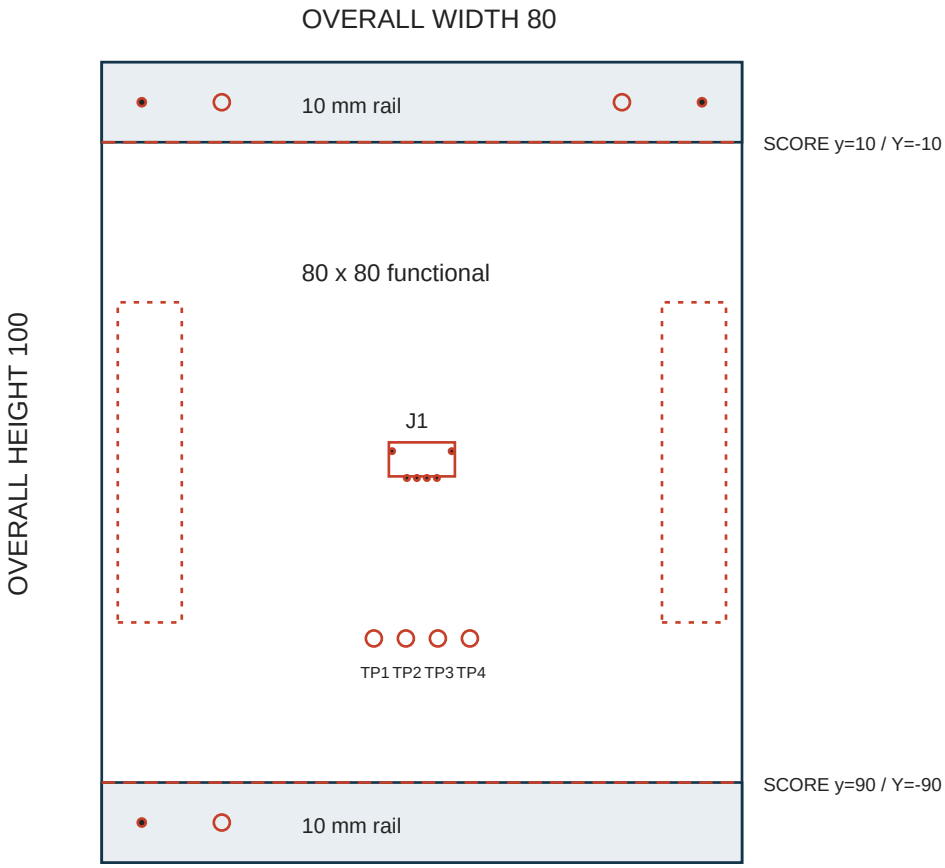

1. GM1 is the closed outer routing profile, 80 x 100. No internal routed slots.
2. GM2 contains exactly TWO full-span V-scores: x=0..80 at y=10 and y=90.
   Score from both faces as the fabricator process requires; retain rails for assembly.
   Score stroke width is annotation only, not a slot or cutter width.
3. One functional board per unit; two integral 10 mm rails. No additional array/rails.
4. Three NPTH tooling holes: diameter 2 at (15,5), (65,5), (15,95).
5. Three fiducials: diameter 1 copper / 2 mask at (5,5), (75,5), (5,95).
6. Dashed side boxes: clamp reservations x=2..10 / 70..78, y=30..70, both faces.
7. Coordinates above use upper-left origin, X right / y down. Manufacturing Y=-y.
8. FR-4, 2 layers, 1.6 mm, 1 oz outer copper, green mask, white silk, lead-free HASL.
9. Standard Assembly, TOP only; one exact JST BM04B-GHS-TBT(LF)(SN) at J1.
10. GM2 recognition and score interpretation must be confirmed in supplier CAM.
    No material, scoring tolerance or assembly acceptance is established by this PDF.

GH4 COUPON / SUBMISSION CANDIDATE

Assembly datum and continuity inspection - top view

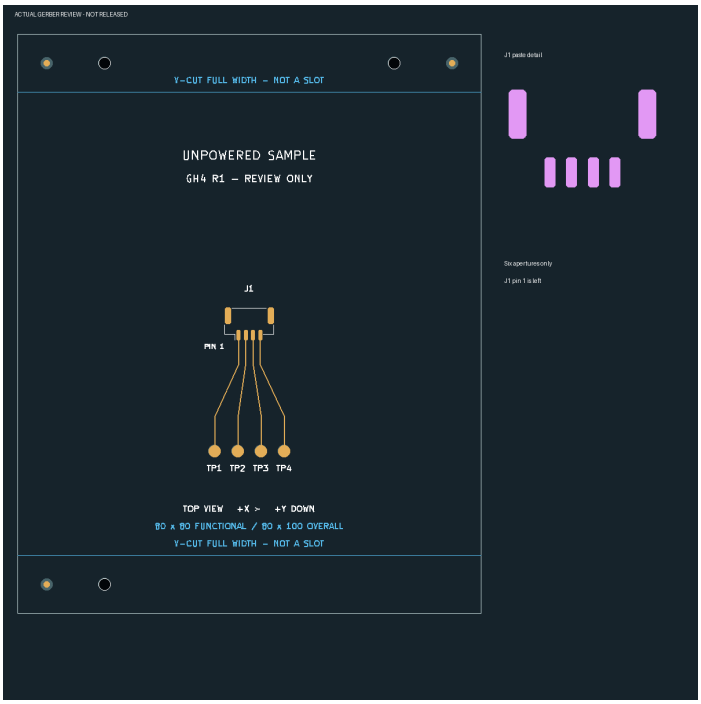

CPL: J1 / top / 0 degrees

X = 40.000000 mm

Y = -50.000000 mm

No mirror, inversion or offset.

Pin 1 is LEFT in this view.

Signal row below header body.

MP lands above signal row.

Body center: X40, Y-49.625.

CPL uses footprint datum,

not a measured pickup point.

The image above is the retained actual-Gerber review render, not a 3D assembly.

Its V-cut annotations come from the original review layer; candidate GM2 has only lines.

Signal	Gerber X / Y (mm)	Continuity endpoint (Gerber X / Y)	
J1.1	38.125 / -51.950	TP1 34.000 / -72.000	net GH1
J1.2	39.375 / -51.950	TP2 38.000 / -72.000	net GH2
J1.3	40.625 / -51.950	TP3 42.000 / -72.000	net GH3
J1.4	41.875 / -51.950	TP4 46.000 / -72.000	net GH4

Signal lands 0.6 x 1.7; MP lands 1.0 x 2.8 at (36.275,-48.6), (43.725,-48.6).

Only J1 is fitted. TP/fiducial/tooling features are bare PCB features, not BOM items.

At upload: check exact MPN C161692, pin 1, body, both MP lands and all four signal lands.

If supplier model datum/rotation differs, resolve in preview; do not flip Y in isolation.

Unpowered only. Physical fit, soldering, continuity and durability remain untested.