





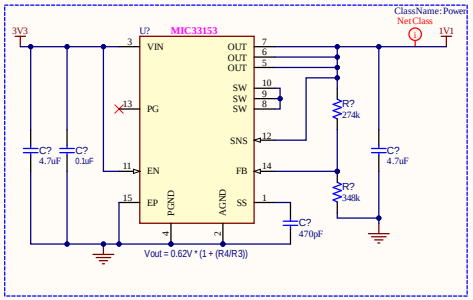



LABEL?
Product number/revision
Serial number
PCBA LABEL 18X6mm

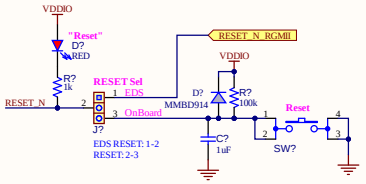





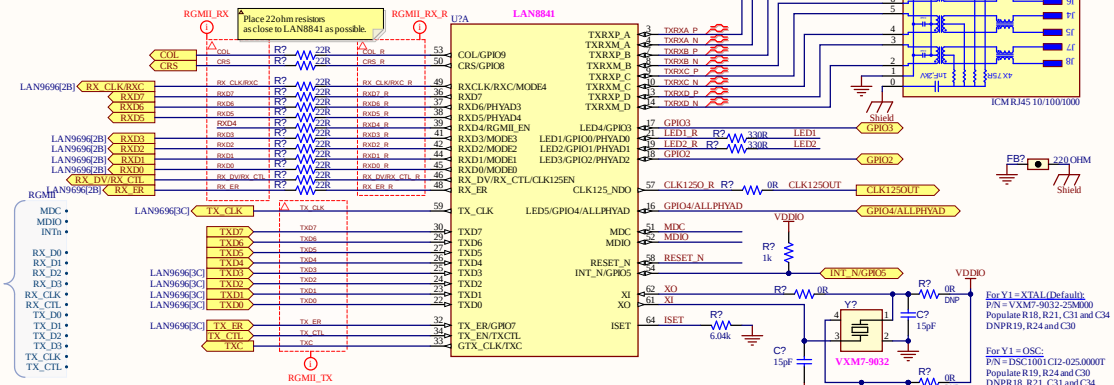

















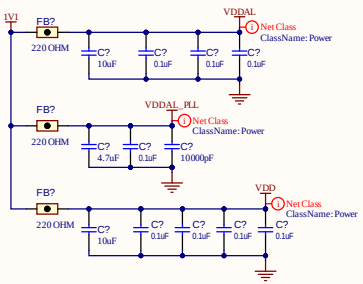


PHYAD[4:0] Straps

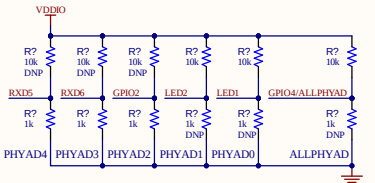

NOTE: PHY Address is 03h to align with SAMA5D3 EDS

MODE[4:0] Straps




Mode [4:1]	Description
1000	Auto-Negotiation Enabled, 10/100 Full and Half, 1000BT Full, EEE Disabled
1100	Auto-Negotiation Enabled, 10/100 Full and Half, 1000BT Full, EEE Enabled

For Y1 = XTAL (Default):
P/N = VXM7-9032-25M000
Populate R18, R21, C31 and C34
DNPR19, R24 and C30


For Y1 = OSC:
P/N = DSC1001CI2-025.0000T
Populate R19, R24 and C30
DNPR18, R21, C31 and C34

Configuration Straps

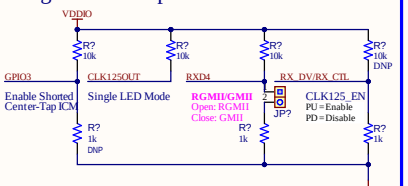


ICM/MAGJACK: 0 = ICM with separate center taps, 1 = ICM with shorted center taps


Title			
Size: C	Number		Revision
Date: 7/23/2026		Sheet of	
File: D:\Fiverr\..\8841.SchDoc		Drawn By:	

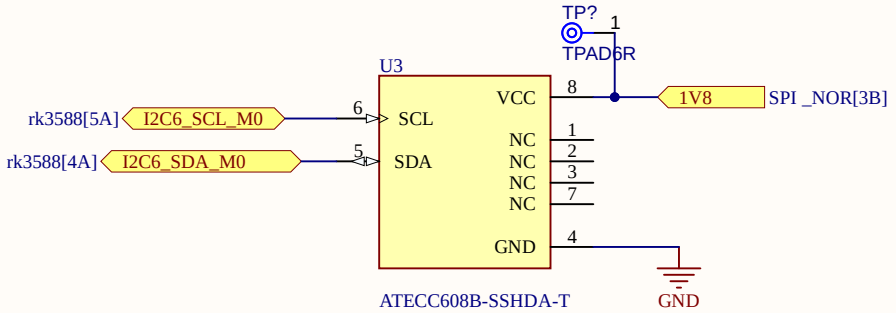


Title			
Size A	Number		Revision
Date:	7/23/2026	Sheet of	
File:	D:\Fiverr\..\ATE_Safety.SchDoc	Drawn By:	

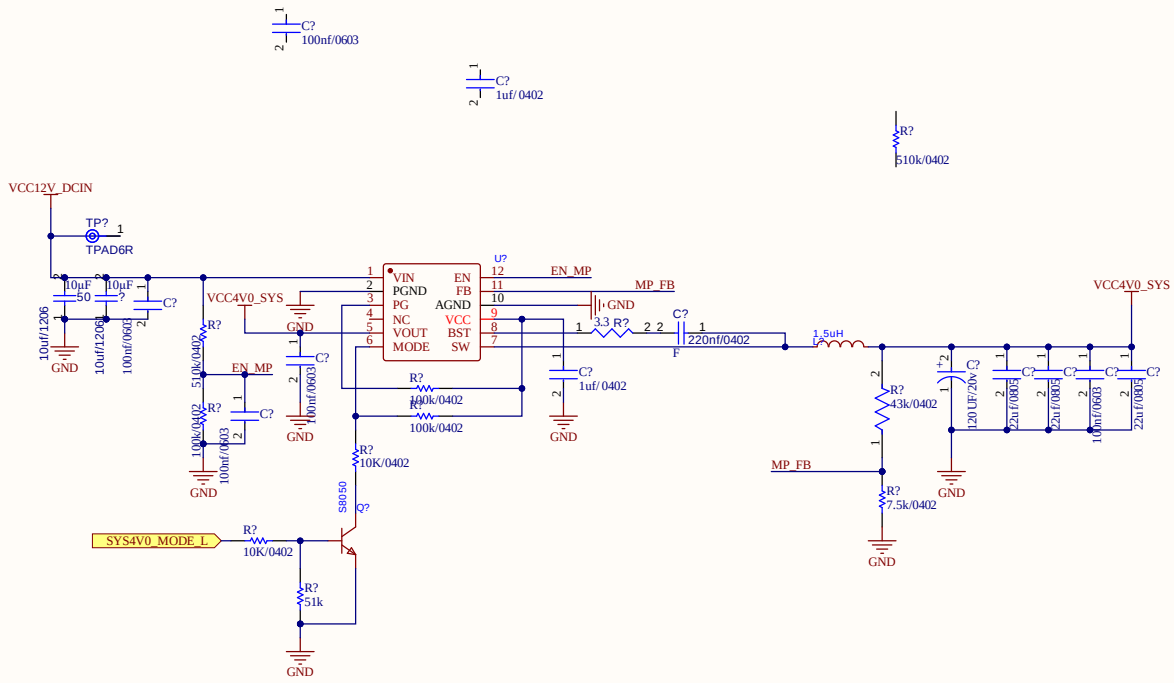



Title			
Size: B	Number		Revision
Date: 7/23/2026		Sheet of	
File: D:\Fiverr\..\BoardSupply.SchDoc		Drawn By:	

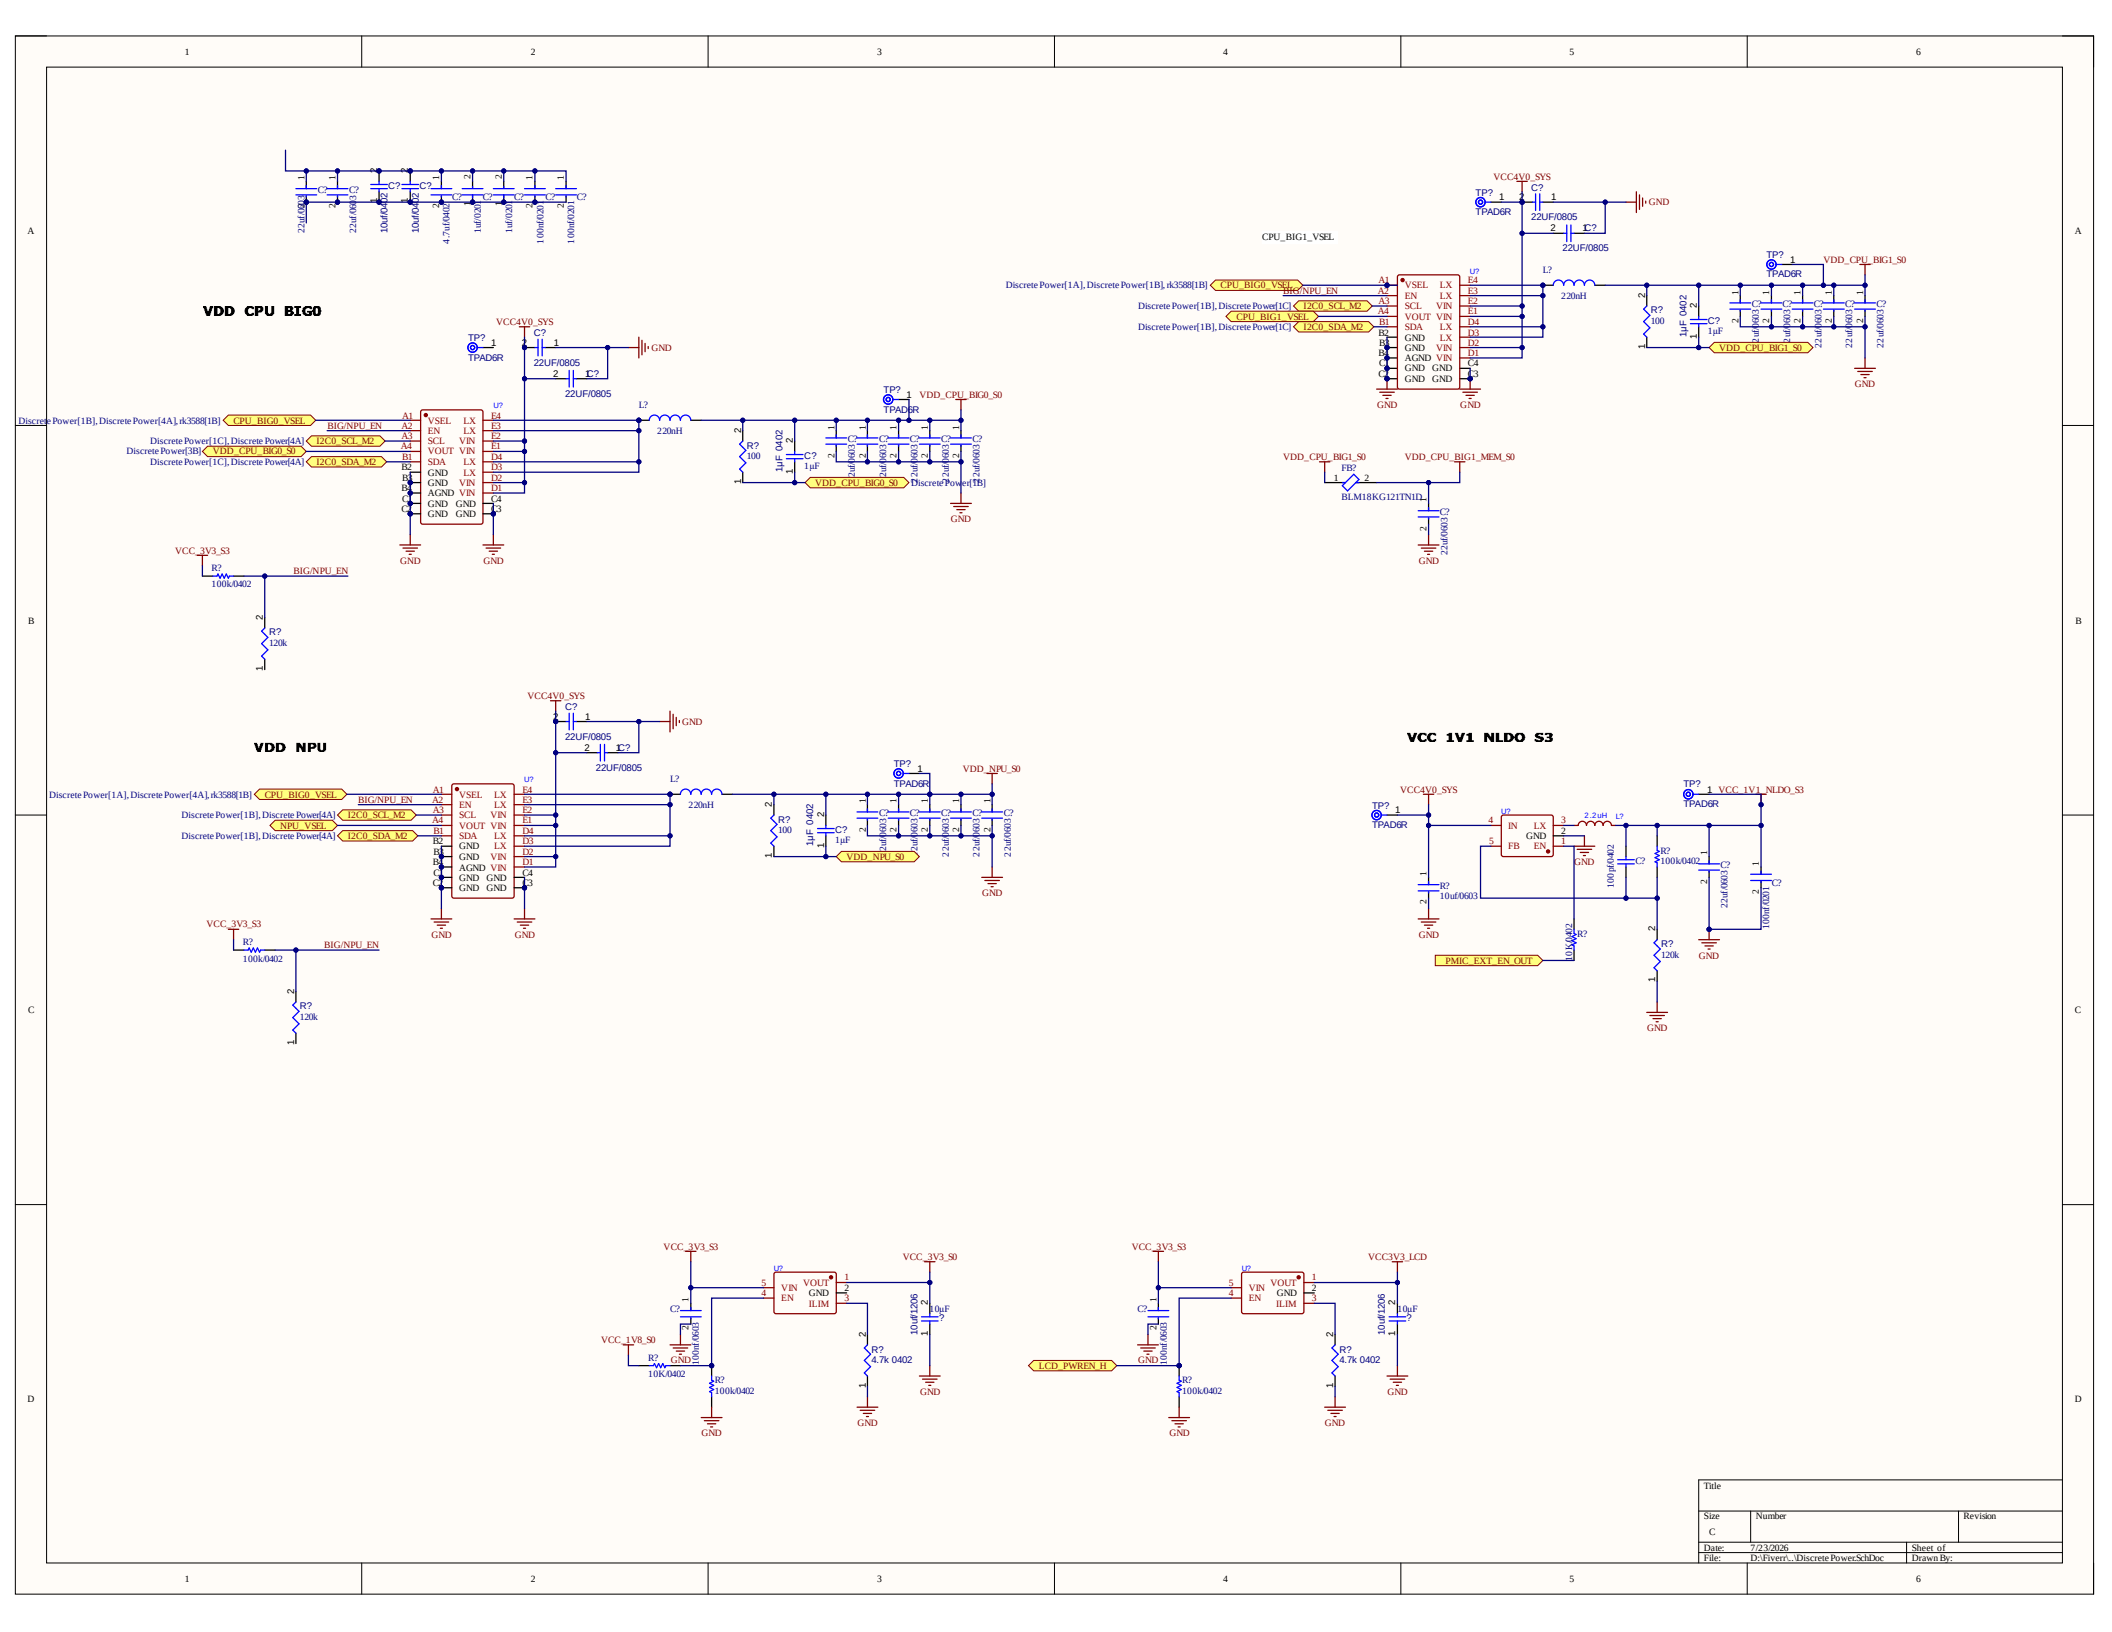


Title		
Size: C	Number	Revision
Date: 7/23/2026		Sheet of
File: D:\Fiverr\...\Discrete Power.SchDoc		Drawn By:

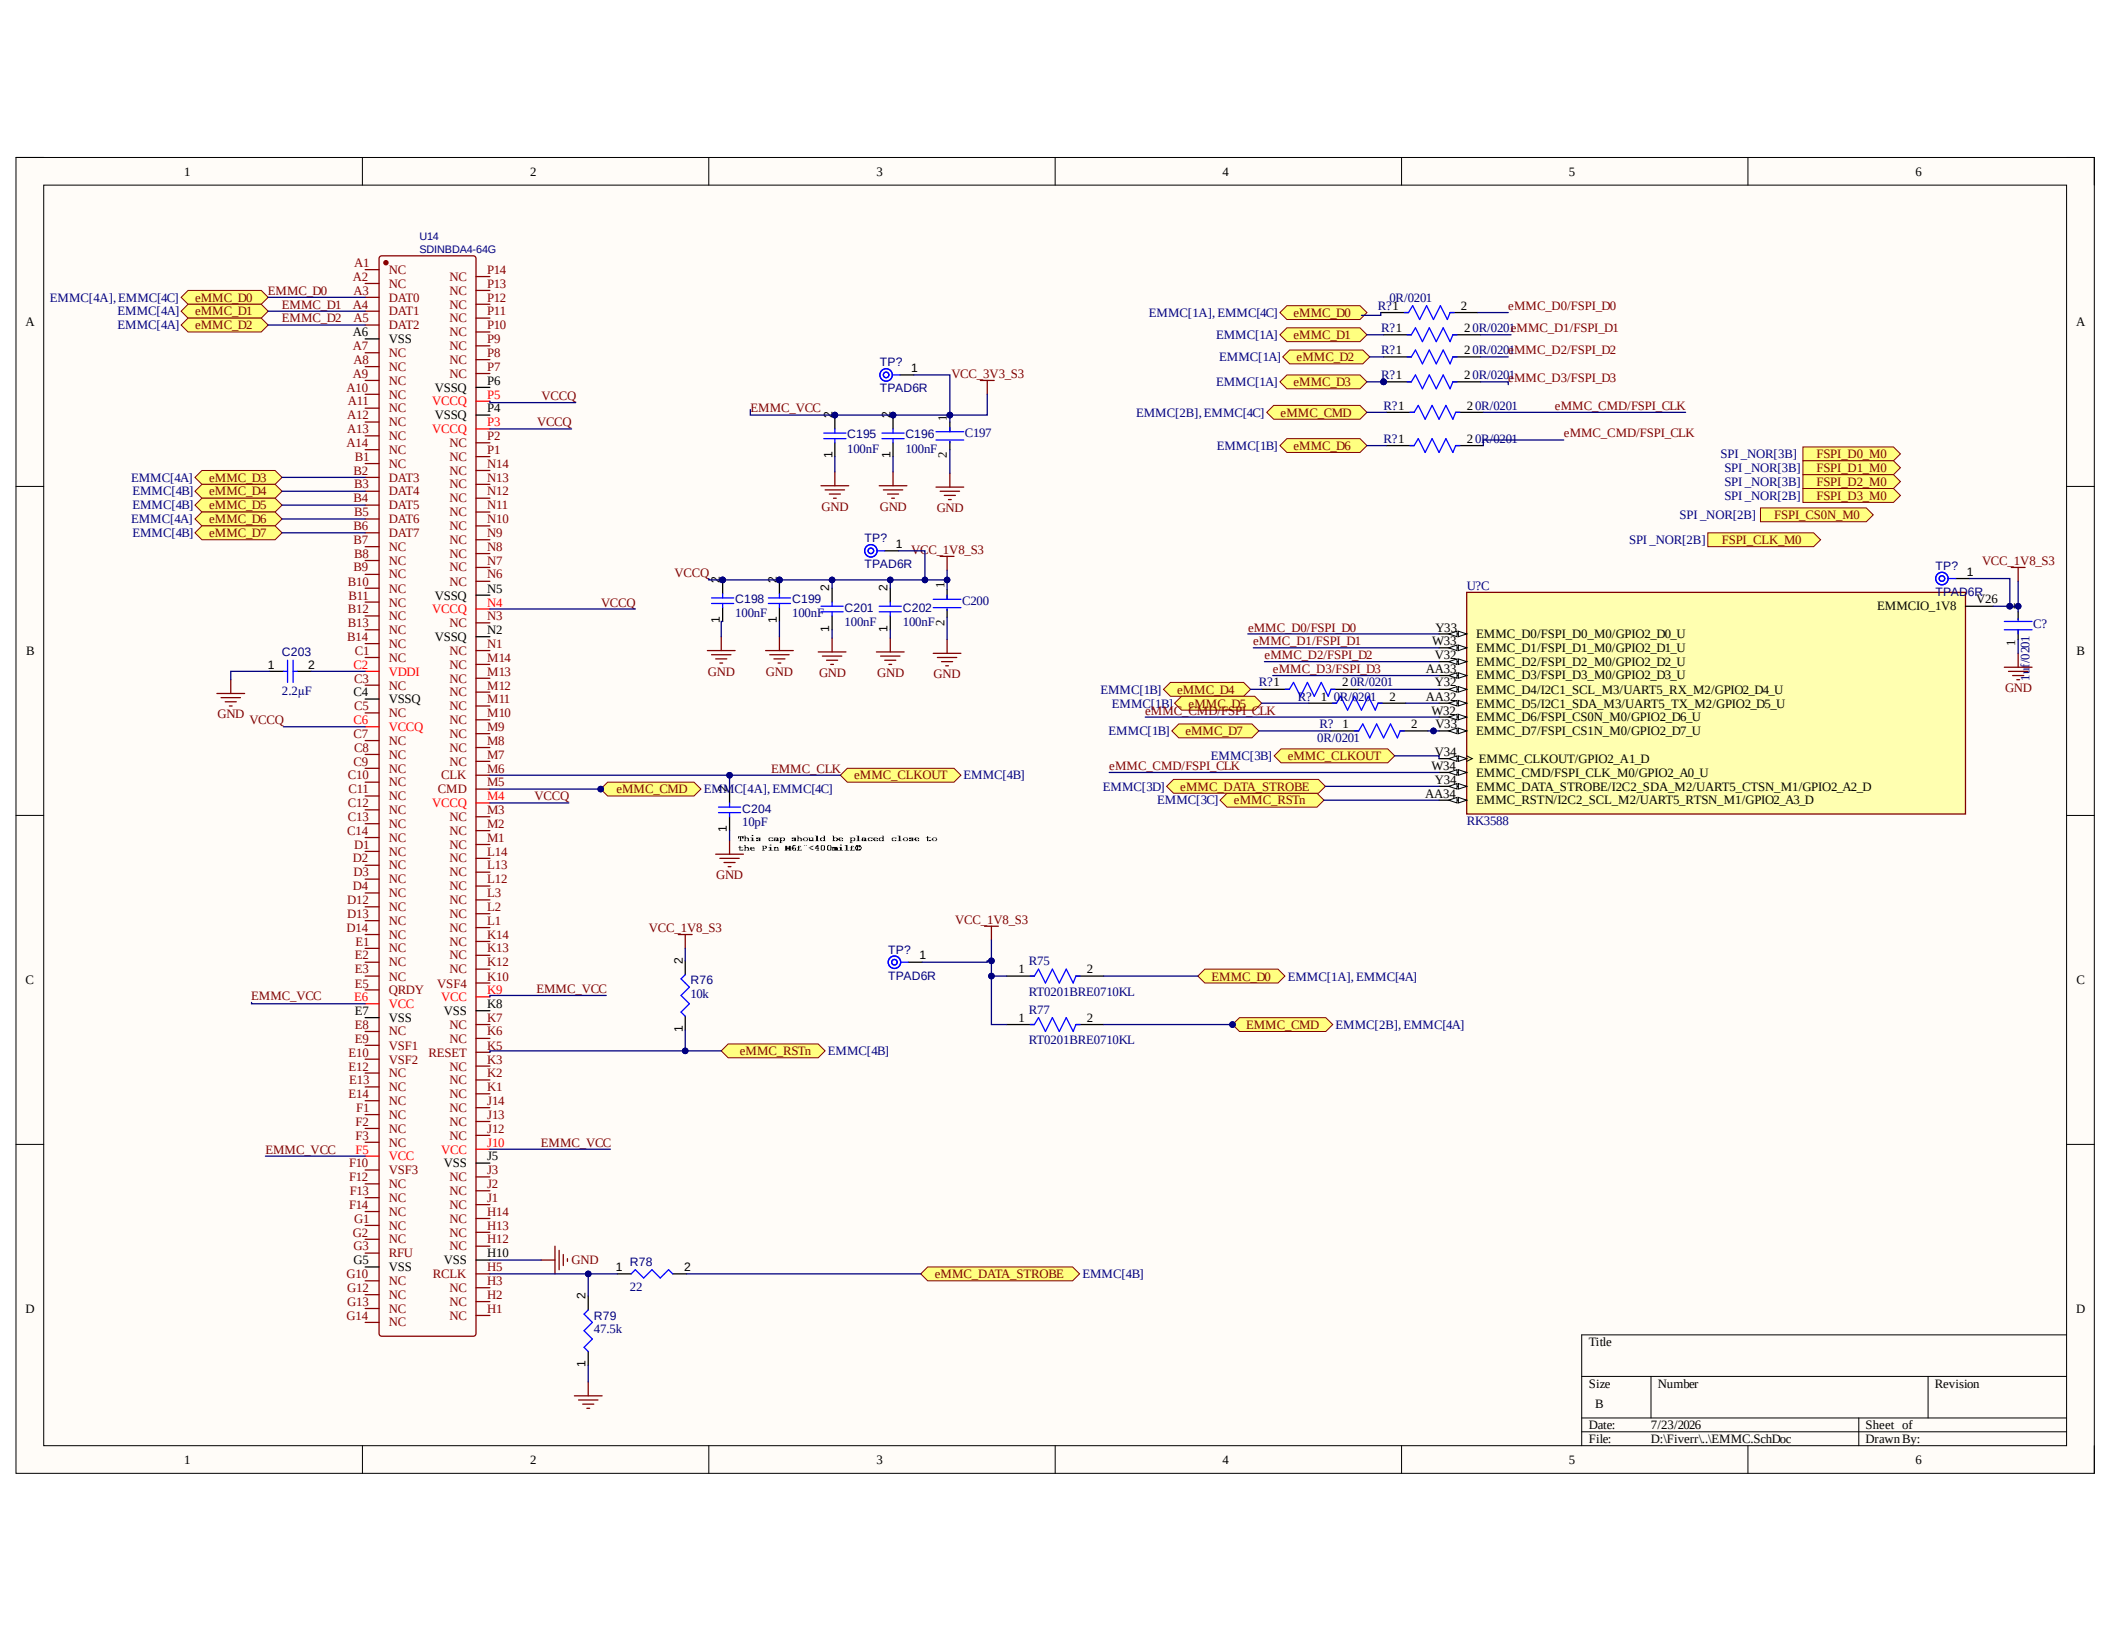
U14
SDINBDA4-64G
C203
2.2μF
C204
10pF
This cap should be placed close to the Pin M6: <400mil
R76
10k
R78
22
R79
47.5k
R75
RT0201BRE0710KL
R77
RT0201BRE0710KL
C195
C196
C197
C198
C199
C200
C201
C202
100nF
U?C
EMMCIO_1V8
RK3588
EMMC_D0/FSPI_D0_M0/GPIO2_D0_U
EMMC_D1/FSPI_D1_M0/GPIO2_D1_U
EMMC_D2/FSPI_D2_M0/GPIO2_D2_U
EMMC_D3/FSPI_D3_M0/GPIO2_D3_U
EMMC_D4/I2C1_SCL_M3/UART5_RX_M2/GPIO2_D4_U
EMMC_D5/I2C1_SDA_M3/UART5_TX_M2/GPIO2_D5_U
EMMC_D6/FSPI_CS0N_M0/GPIO2_D6_U
EMMC_D7/FSPI_CS1N_M0/GPIO2_D7_U
EMMC_CLKOUT/GPIO2_A1_D
EMMC_CMD/FSPI_CLK_M0/GPIO2_A0_U
EMMC_DATA_STROBE/I2C2_SDA_M2/UART5_CTSN_M1/GPIO2_A2_D
EMMC_RSTN/I2C2_SCL_M2/UART5_RTSN_M1/GPIO2_A3_D
Title
Size
B
Number
Revision
Date: 7/23/2026
File: D:\Fiverr\..\EMMC.SchDoc
Sheet of
Drawn By:

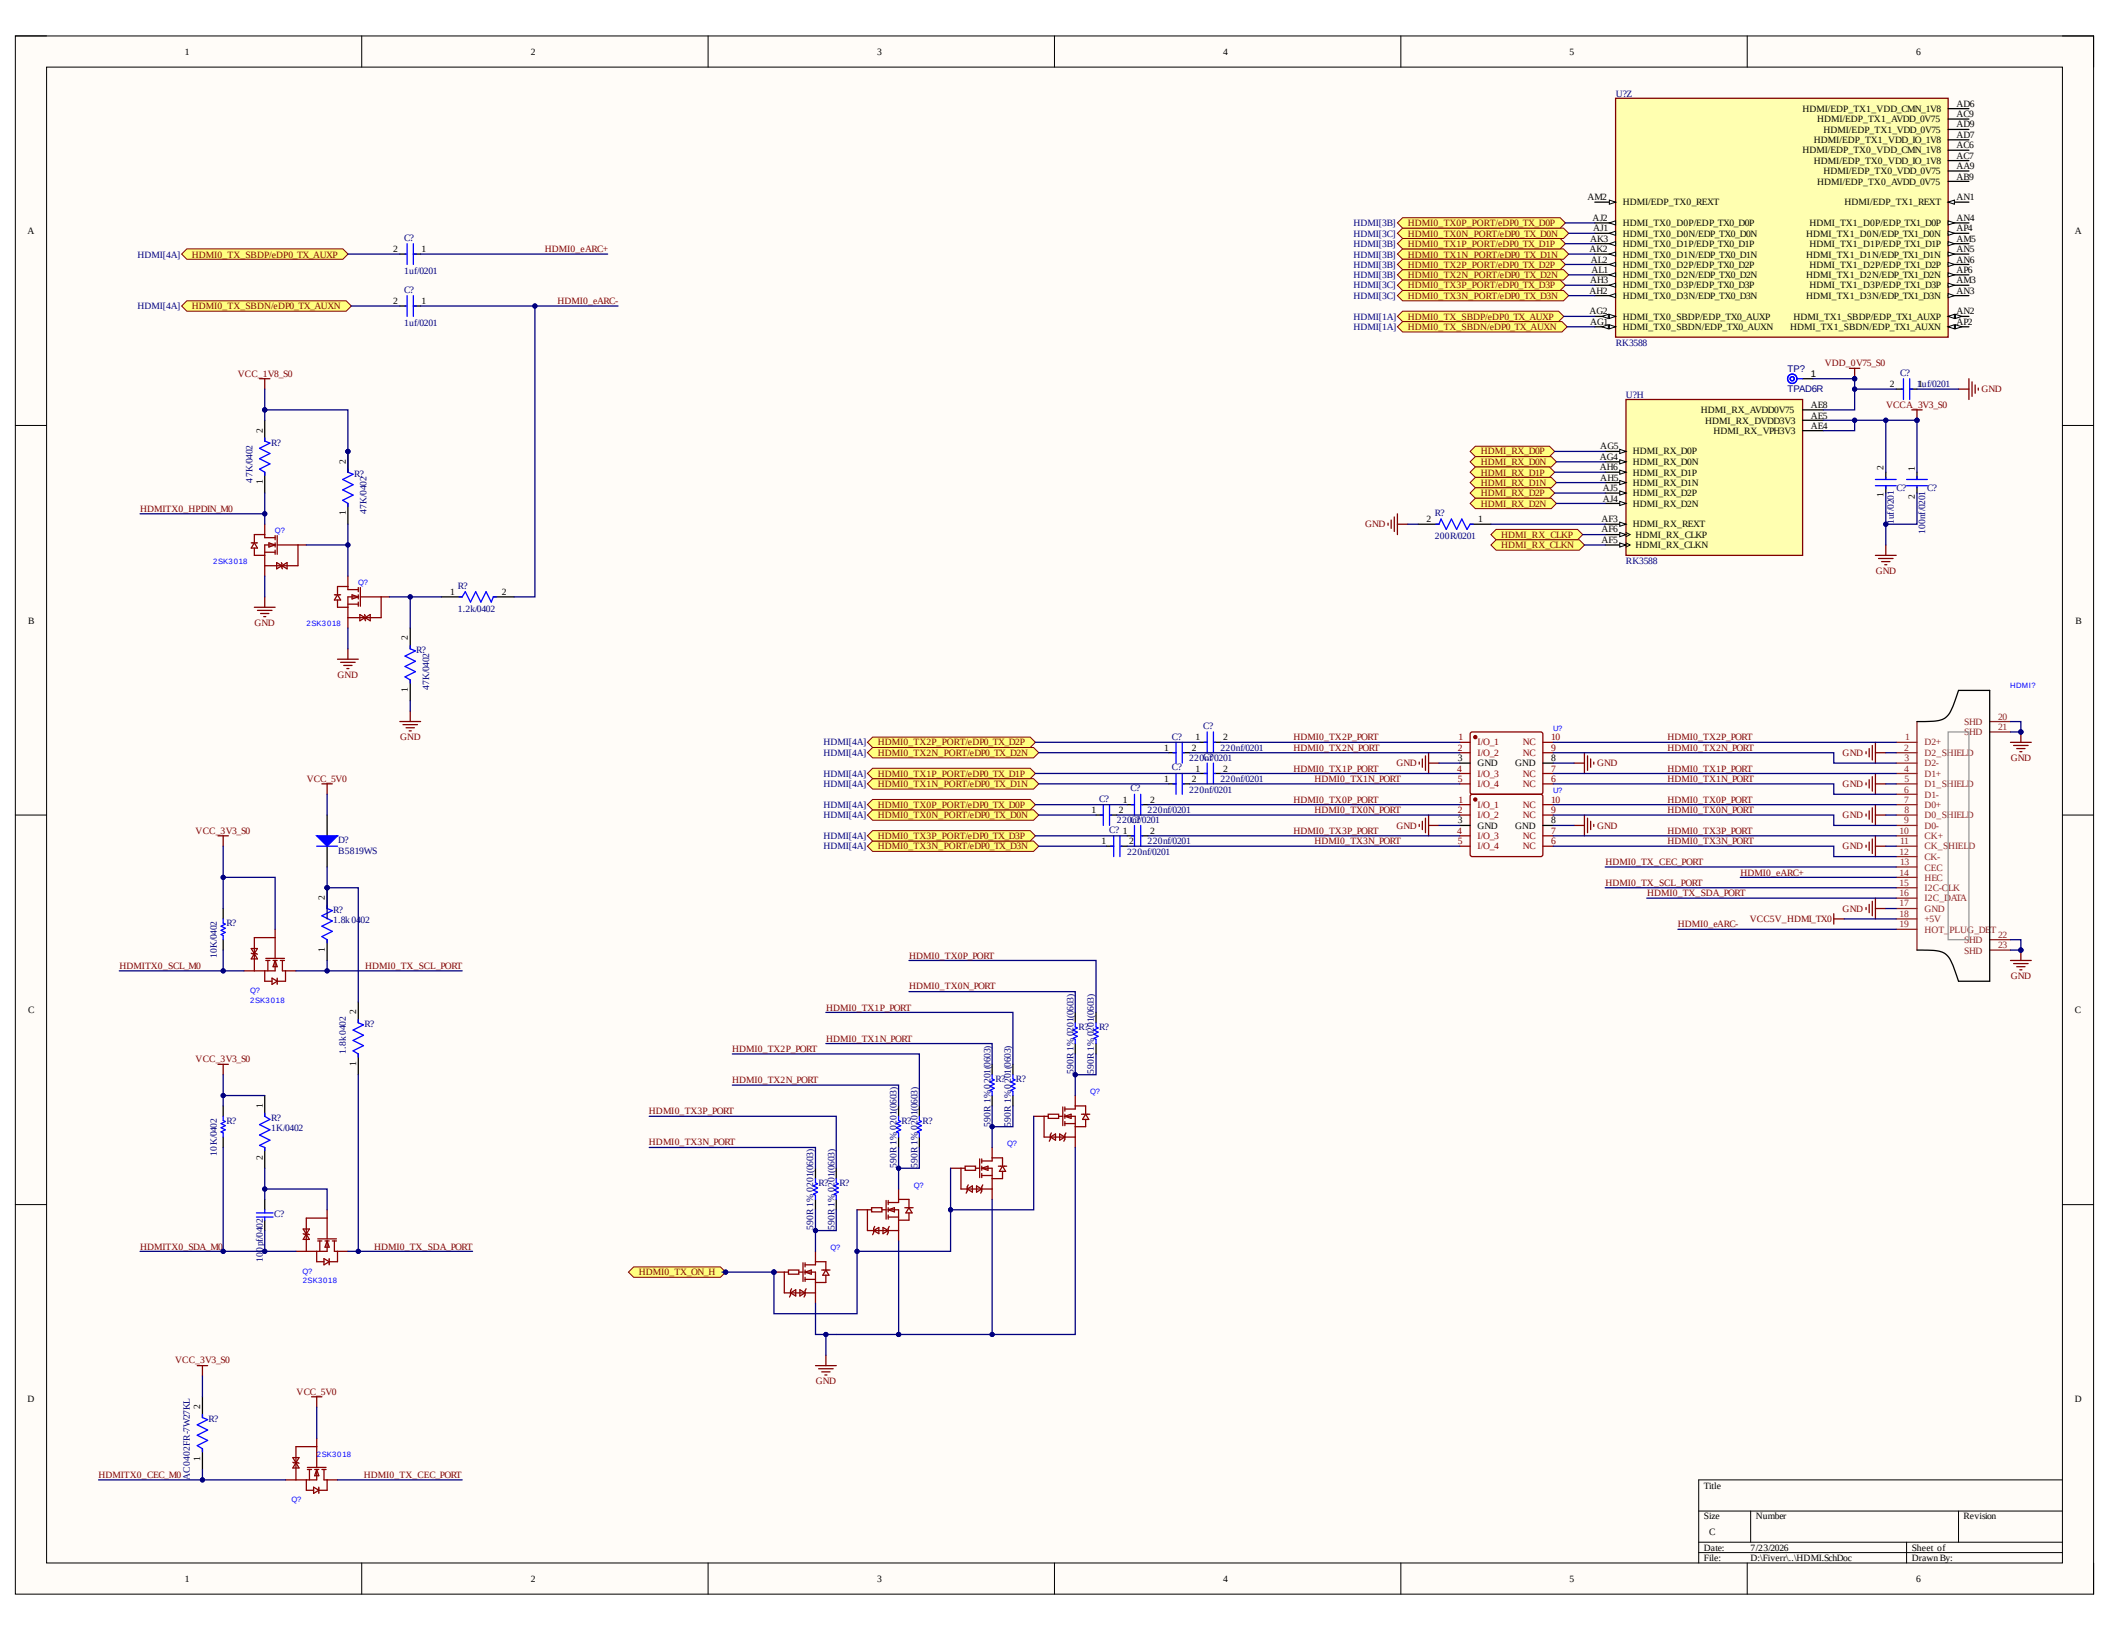

U7Z
RK3588
U7H
RK3588
HDMI?
HDMI_TX0_D0P/EDP_TX0_D0P
HDMI_TX0_D0N/EDP_TX0_D0N
HDMI_TX0_D1P/EDP_TX0_D1P
HDMI_TX0_D1N/EDP_TX0_D1N
HDMI_TX0_D2P/EDP_TX0_D2P
HDMI_TX0_D2N/EDP_TX0_D2N
HDMI_TX0_D3P/EDP_TX0_D3P
HDMI_TX0_D3N/EDP_TX0_D3N
HDMI_TX0_SBDP/EDP_TX0_AUXP
HDMI_TX0_SBDN/EDP_TX0_AUXN
HDMI_RX_D0P
HDMI_RX_D0N
HDMI_RX_D1P
HDMI_RX_D1N
HDMI_RX_D2P
HDMI_RX_D2N
HDMI_RX_CLKP
HDMI_RX_CLKN
HDMI0_TX_SBDP/eDP0_TX_AUXP
HDMI0_TX_SBDN/eDP0_TX_AUXN
HDMI0_eARC+
HDMI0_eARC-
HDMITX0_HPDIN_M0
HDMITX0_SCL_M0
HDMITX0_SDA_M0
HDMITX0_CEC_M0
HDMI0_TX_SCL_PORT
HDMI0_TX_SDA_PORT
HDMI0_TX_CEC_PORT
HDMI0_TX_ON_H
HDMI0_TX0P_PORT
HDMI0_TX0N_PORT
HDMI0_TX1P_PORT
HDMI0_TX1N_PORT
HDMI0_TX2P_PORT
HDMI0_TX2N_PORT
HDMI0_TX3P_PORT
HDMI0_TX3N_PORT
VCC_1V8_S0
VCC_3V3_S0
VCC_5V0
VCCA_3V3_S0
VDD_0V75_S0
VCC5V_HDMI_TX0
2SK3018
B5819WS
GND
Title
Size
C
Number
Revision
Date:
7/23/2026
File:
D:\Fiverr\..\HDMI.SchDoc
Sheet of
Drawn By:

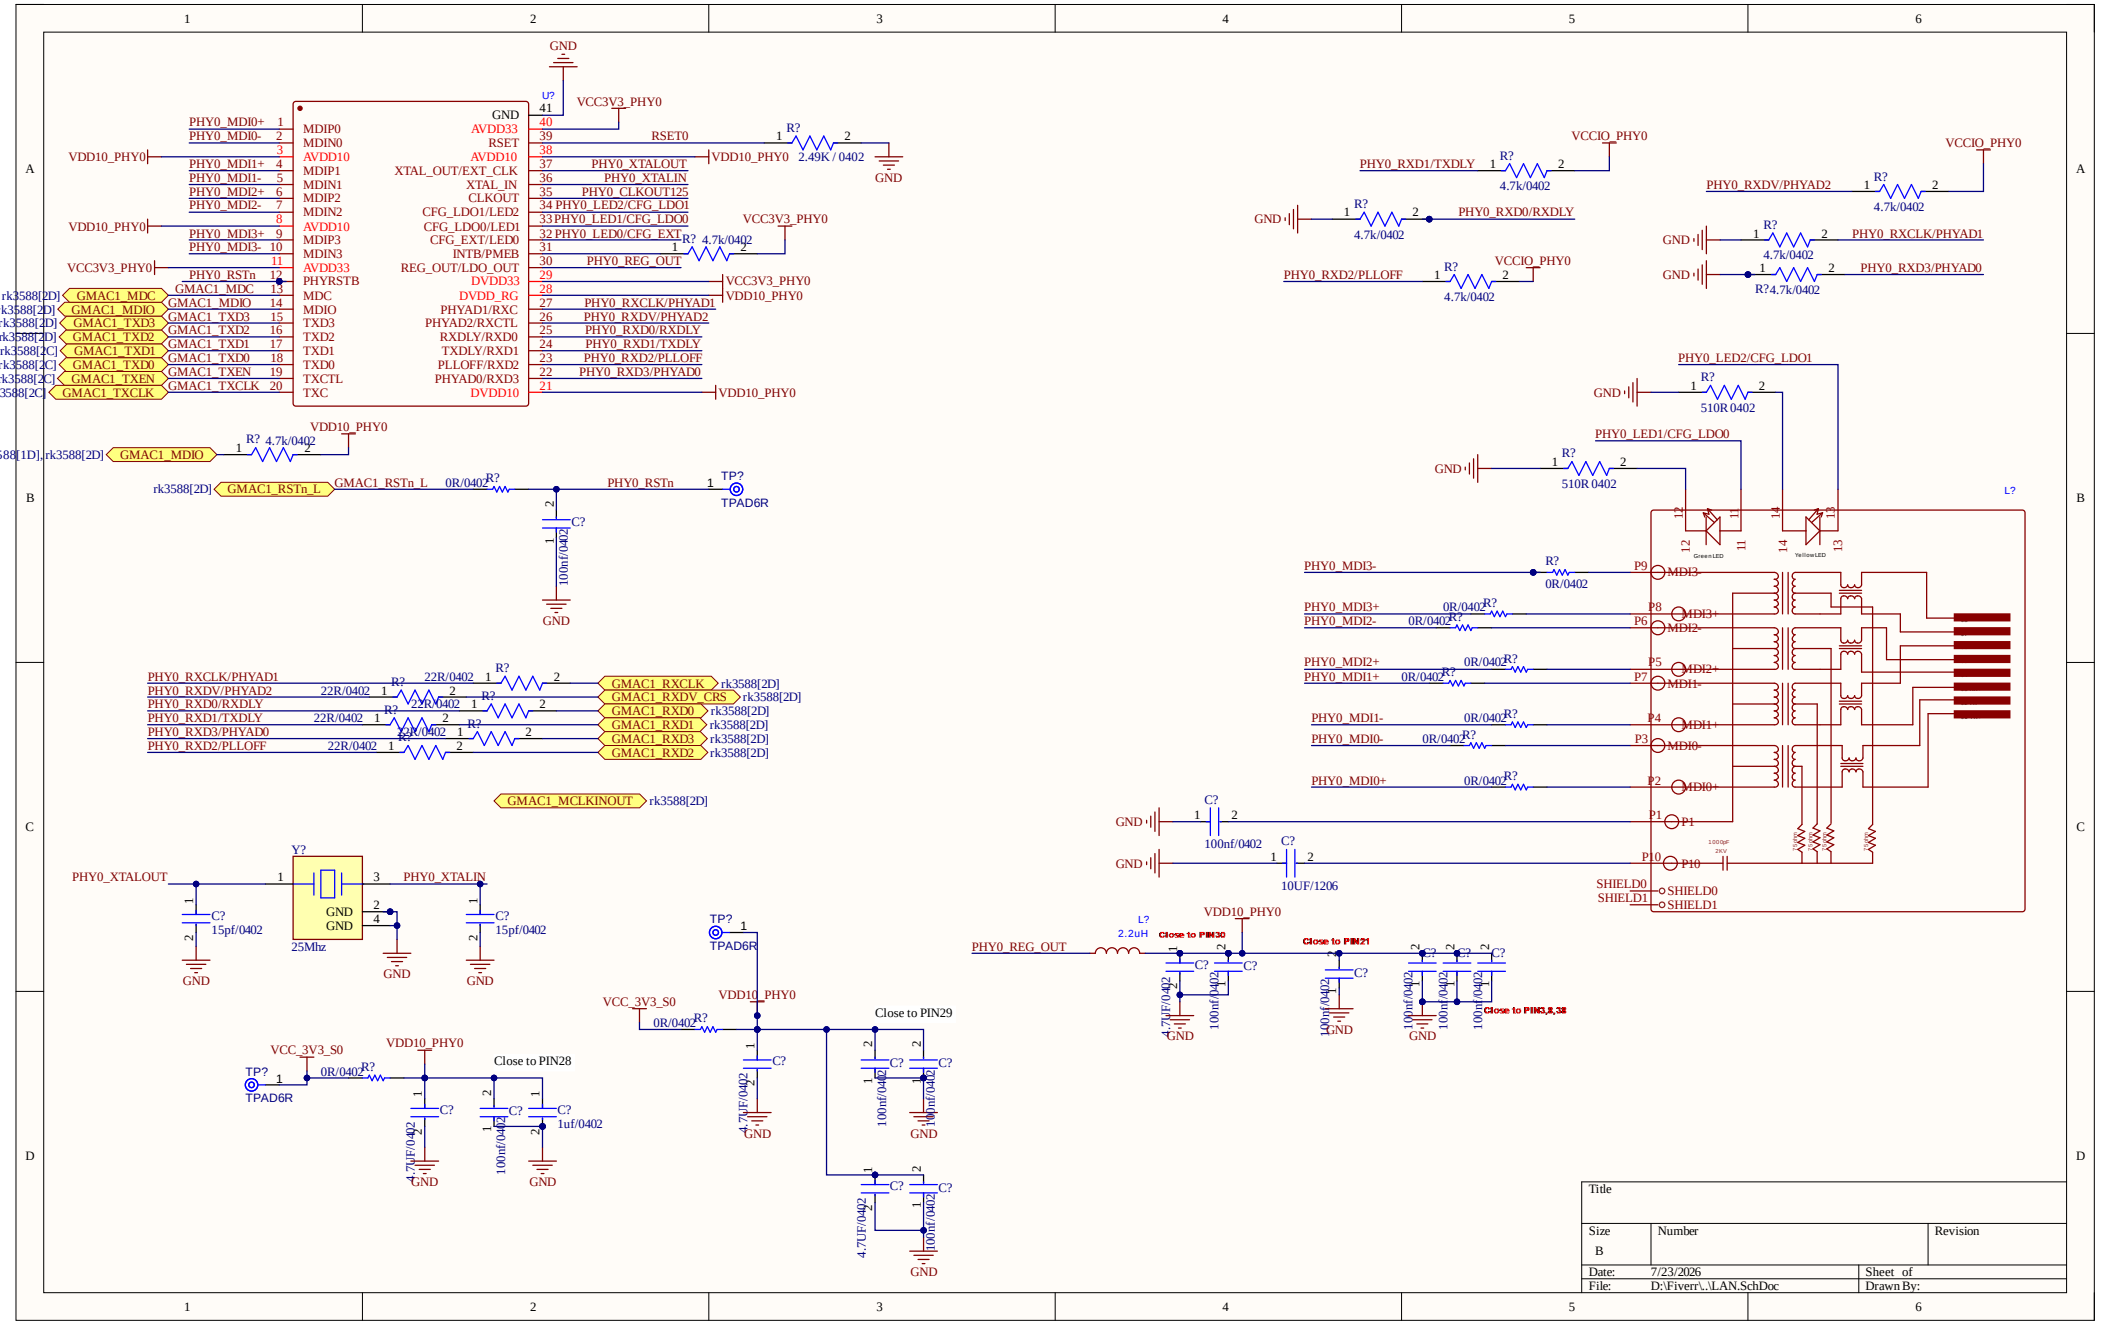
GND
VCC3V3_PHY0
VDD10_PHY0
VCCIO_PHY0
PHY0_MDI0+
PHY0_MDI0-
PHY0_MDI1+
PHY0_MDI1-
PHY0_MDI2+
PHY0_MDI2-
PHY0_MDI3+
PHY0_MDI3-
PHY0_RSTn
GMAC1_MDC
GMAC1_MDIO
GMAC1_TXD3
GMAC1_TXD2
GMAC1_TXD1
GMAC1_TXD0
GMAC1_TXEN
GMAC1_TXCLK
GMAC1_RSTn_L
PHY0_RXCLK/PHYAD1
PHY0_RXDV/PHYAD2
PHY0_RXD0/RXDLY
PHY0_RXD1/TXDLY
PHY0_RXD2/PLLOFF
PHY0_RXD3/PHYAD0
GMAC1_MCLKINOUT
PHY0_XTALOUT
PHY0_XTALIN
PHY0_REG_OUT
PHY0_LED2/CFG_LDO1
PHY0_LED1/CFG_LDO0
SHIELD0
SHIELD1
MDIP0
MDIN0
AVDD10
MDIP1
MDIN1
MDIP2
MDIN2
AVDD10
MDIP3
MDIN3
AVDD33
PHYRSTB
MDC
MDIO
TXD3
TXD2
TXD1
TXD0
TXCTL
TXC
AVDD33
RSET
AVDD10
XTAL_OUT/EXT_CLK
XTAL_IN
CLKOUT
CFG_LDO1/LED2
CFG_LDO0/LED1
CFG_EXT/LED0
INTB/PMEB
REG_OUT/LDO_OUT
DVDD33
DVDD_RG
PHYAD1/RXC
PHYAD2/RXCTL
RXDLY/RXD0
TXDLY/RXD1
PLLOFF/RXD2
PHYAD0/RXD3
DVDD10
2.49K / 0402
4.7k/0402
510R 0402
0R/0402
22R/0402
100nf/0402
10UF/1206
15pf/0402
25Mhz
2.2uH
1uf/0402
4.7UF/0402
Close to PIN30
Close to PIN21
Close to PIN28
Close to PIN29
Close to PIN3,8,38
TPAD6R
Green LED
Yellow LED
Title
Size
B
Number
Revision
Date:
7/23/2026
Sheet of
File:
D:\Fiverr\..\LAN.SchDoc
Drawn By:


15V-56V in, 12V @ 4A (5A)

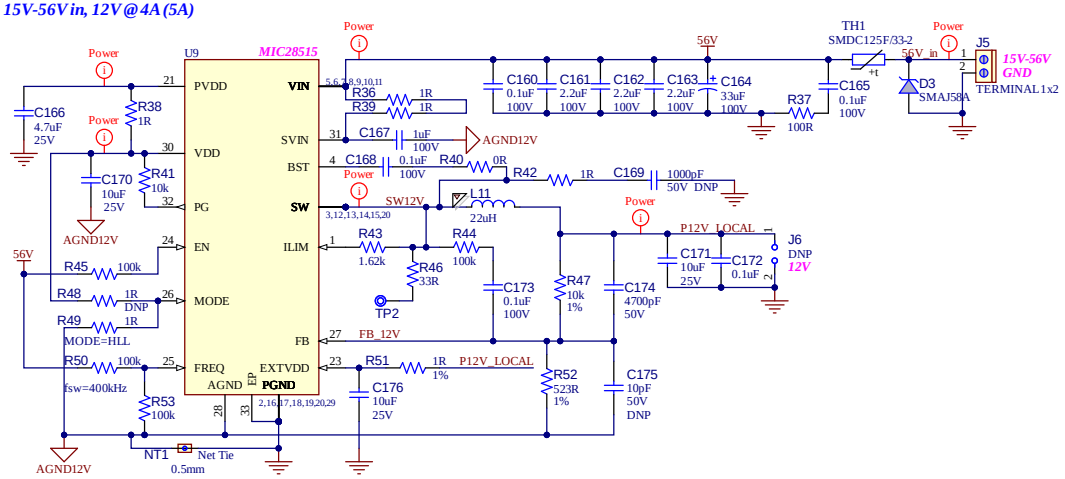


SW3 selects J19 or J23 as power source

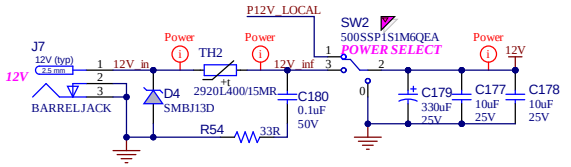



5V @ 1.2A (2A)

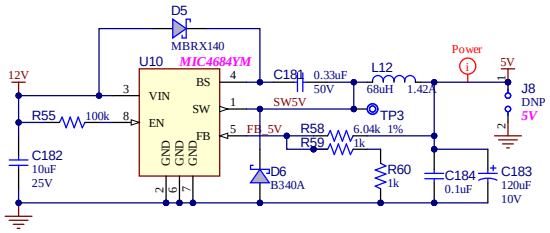


2V5 @ 25mA

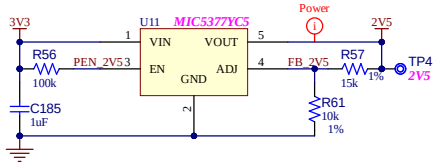

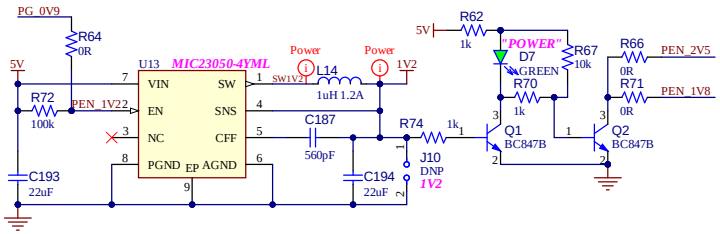


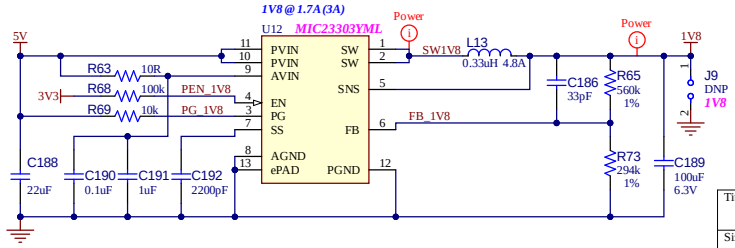


Title		
Size A3	Number	Revision
Date: 7/23/2026		Sheet of
File: D:\Fiverr\..\LAN_Supply.SchDoc		Drawn By:

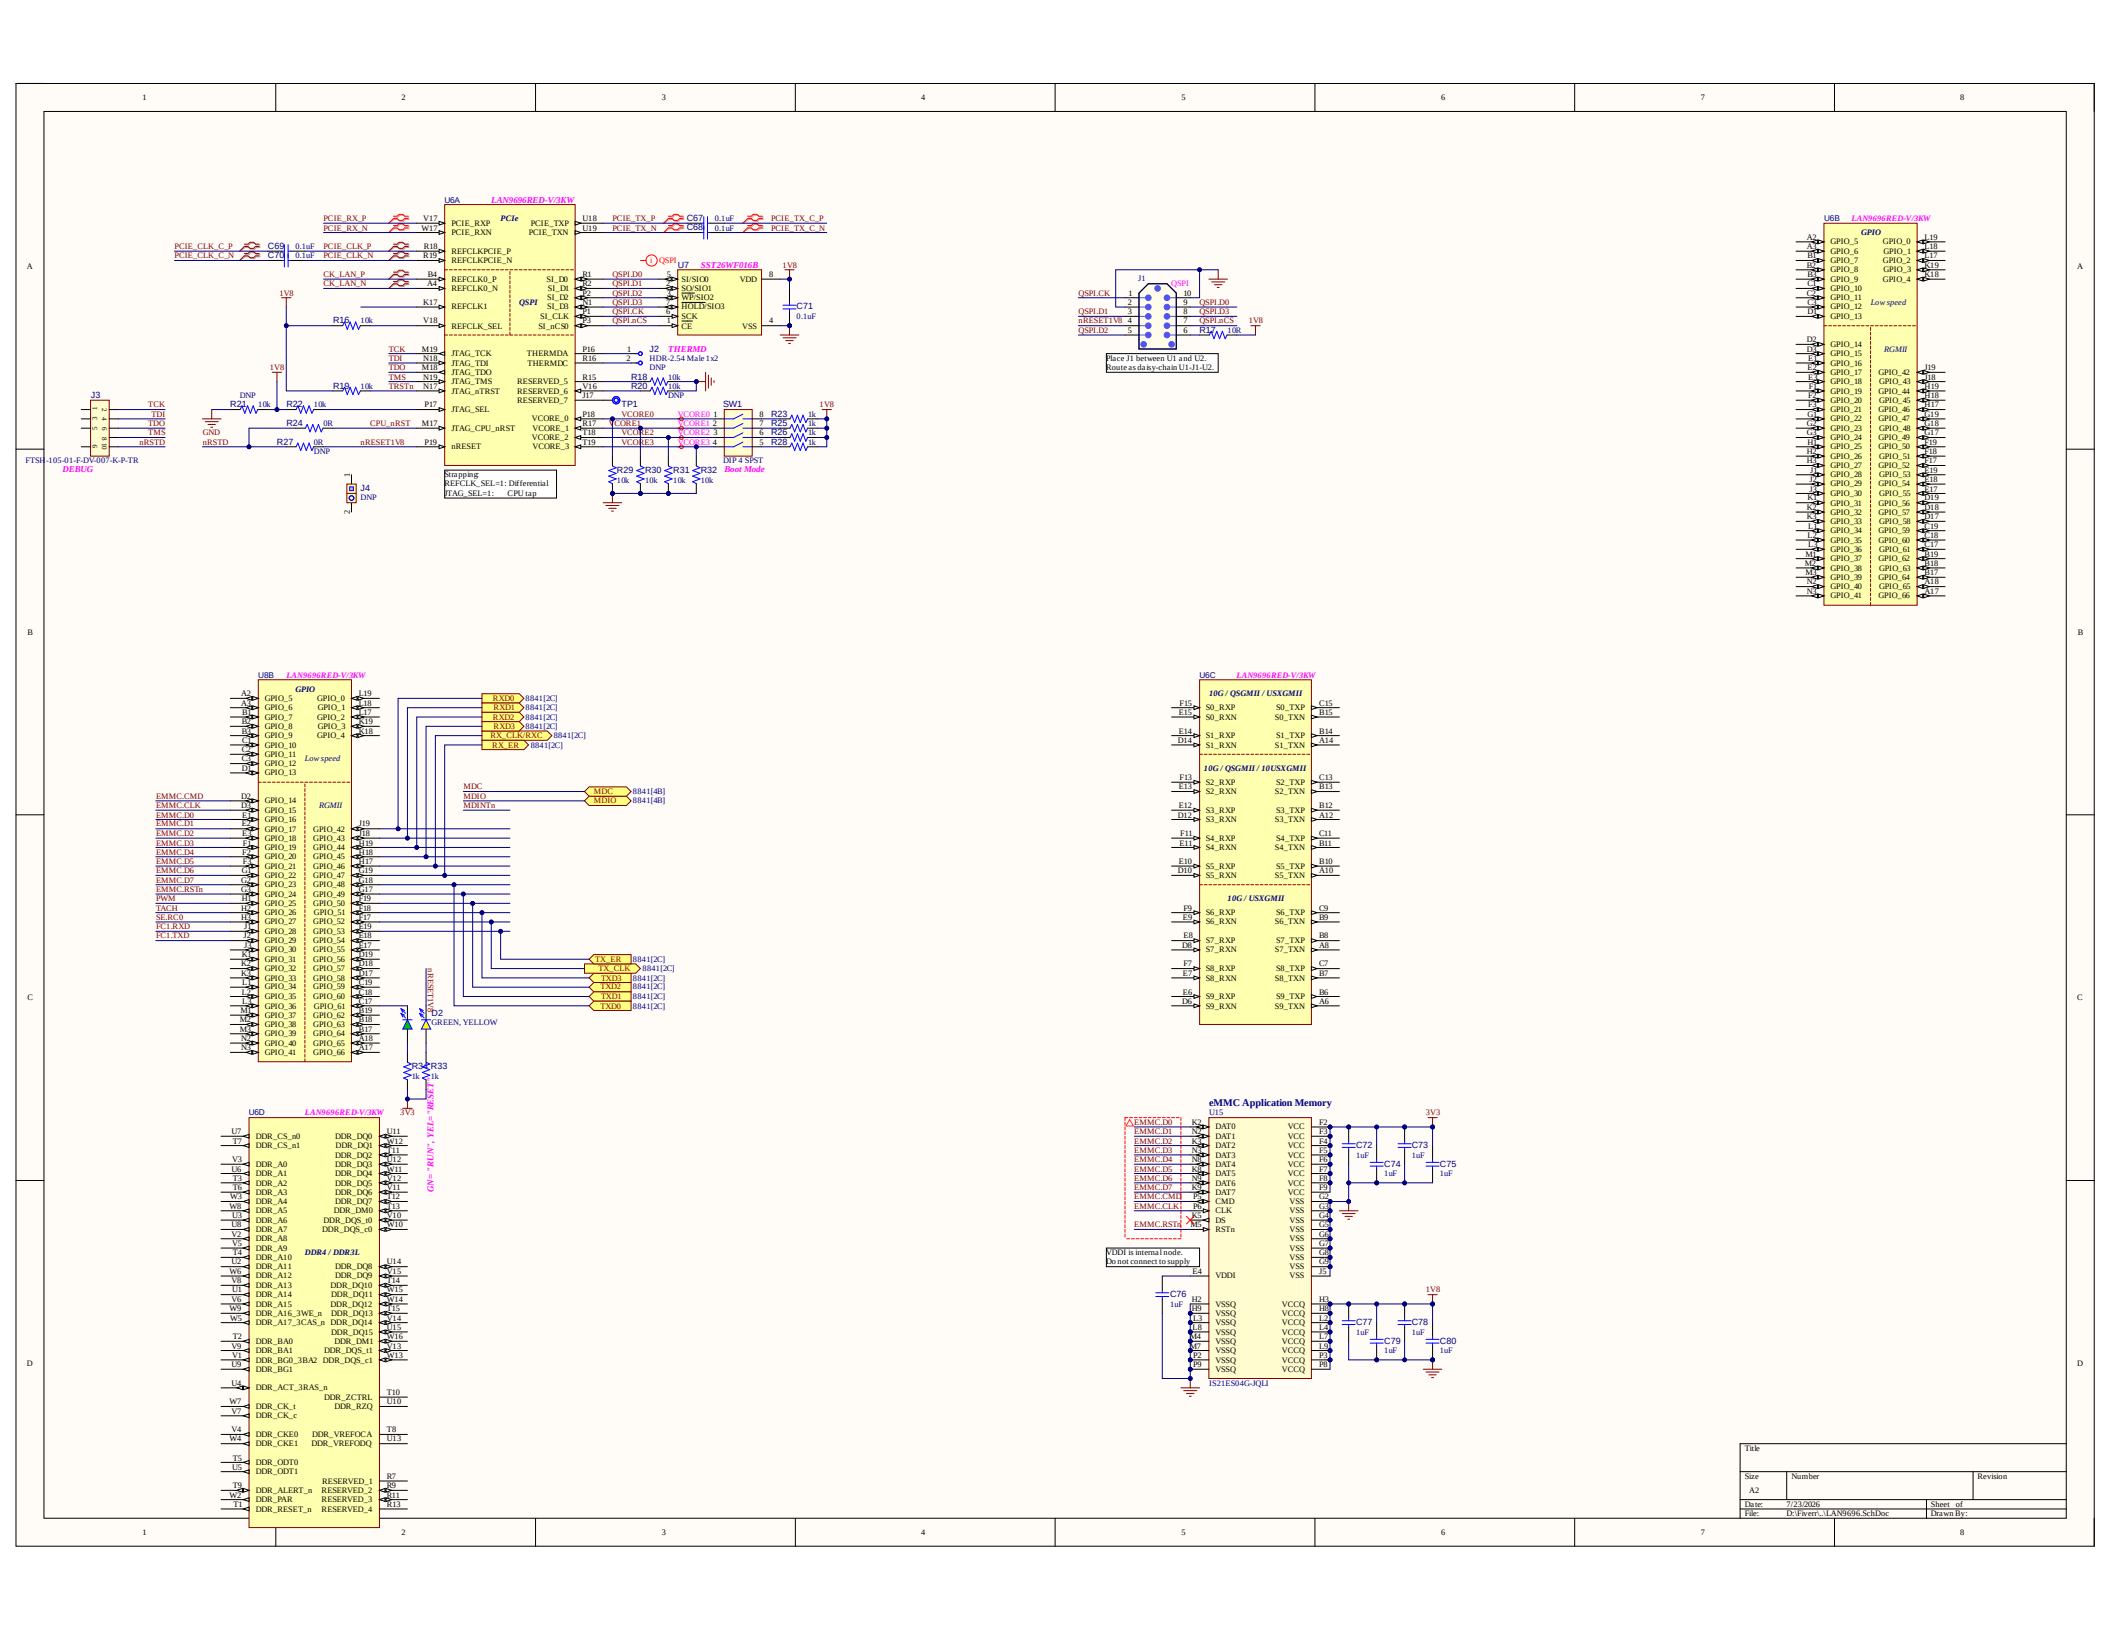



Title		
Size: A2	Number	Revision
Date: 7/23/2026		Sheet of
File: D:\Fiverr\...\LAN9696.SchDoc		Drawn By:

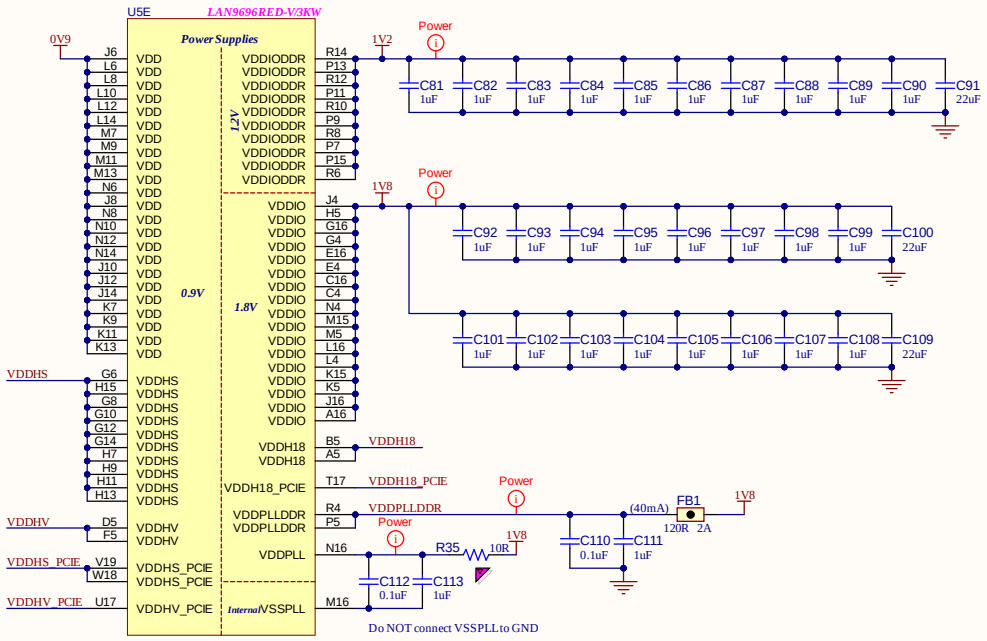


Power supplies:
0.9V 6.7A : LAN9698 VDD(5A)+VDDHS(1.6A)+VDDHV(0.1A)
1.2V 0.5A : LAN9698 VDDIODDR(0.2A)+DDR VDDQ(0.3A)
1.8V 1.7A : LAN9698 VDDH(0.3A)+VDDIO(0.5A)+ZL30732(0.5A)+Other(0.4A)

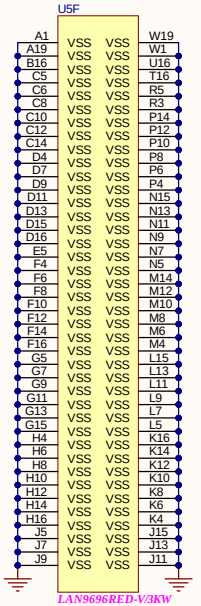


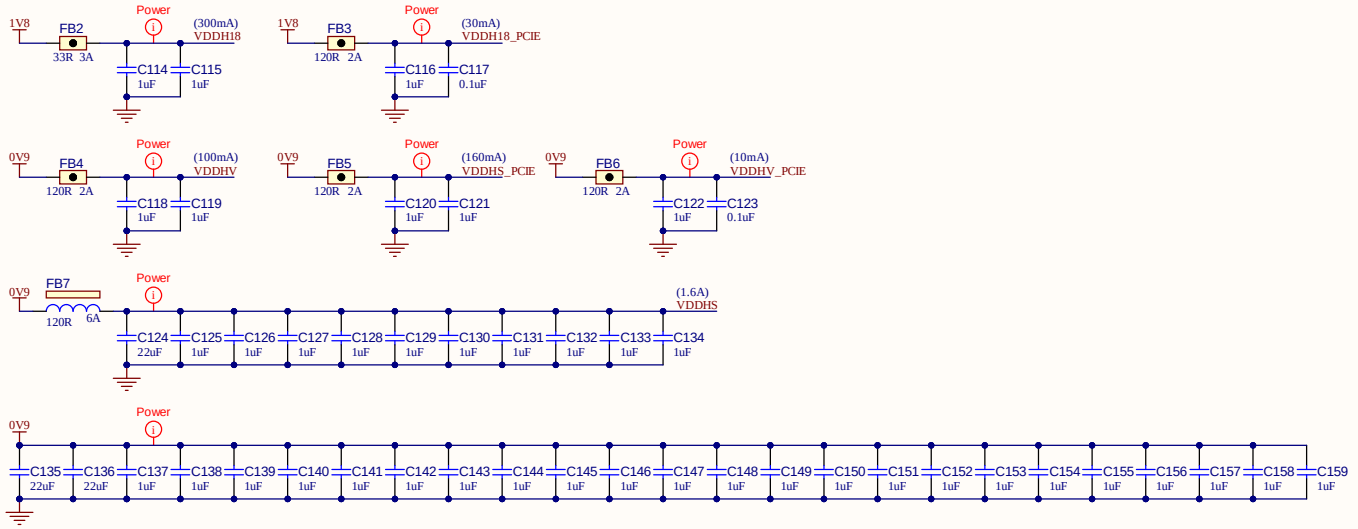


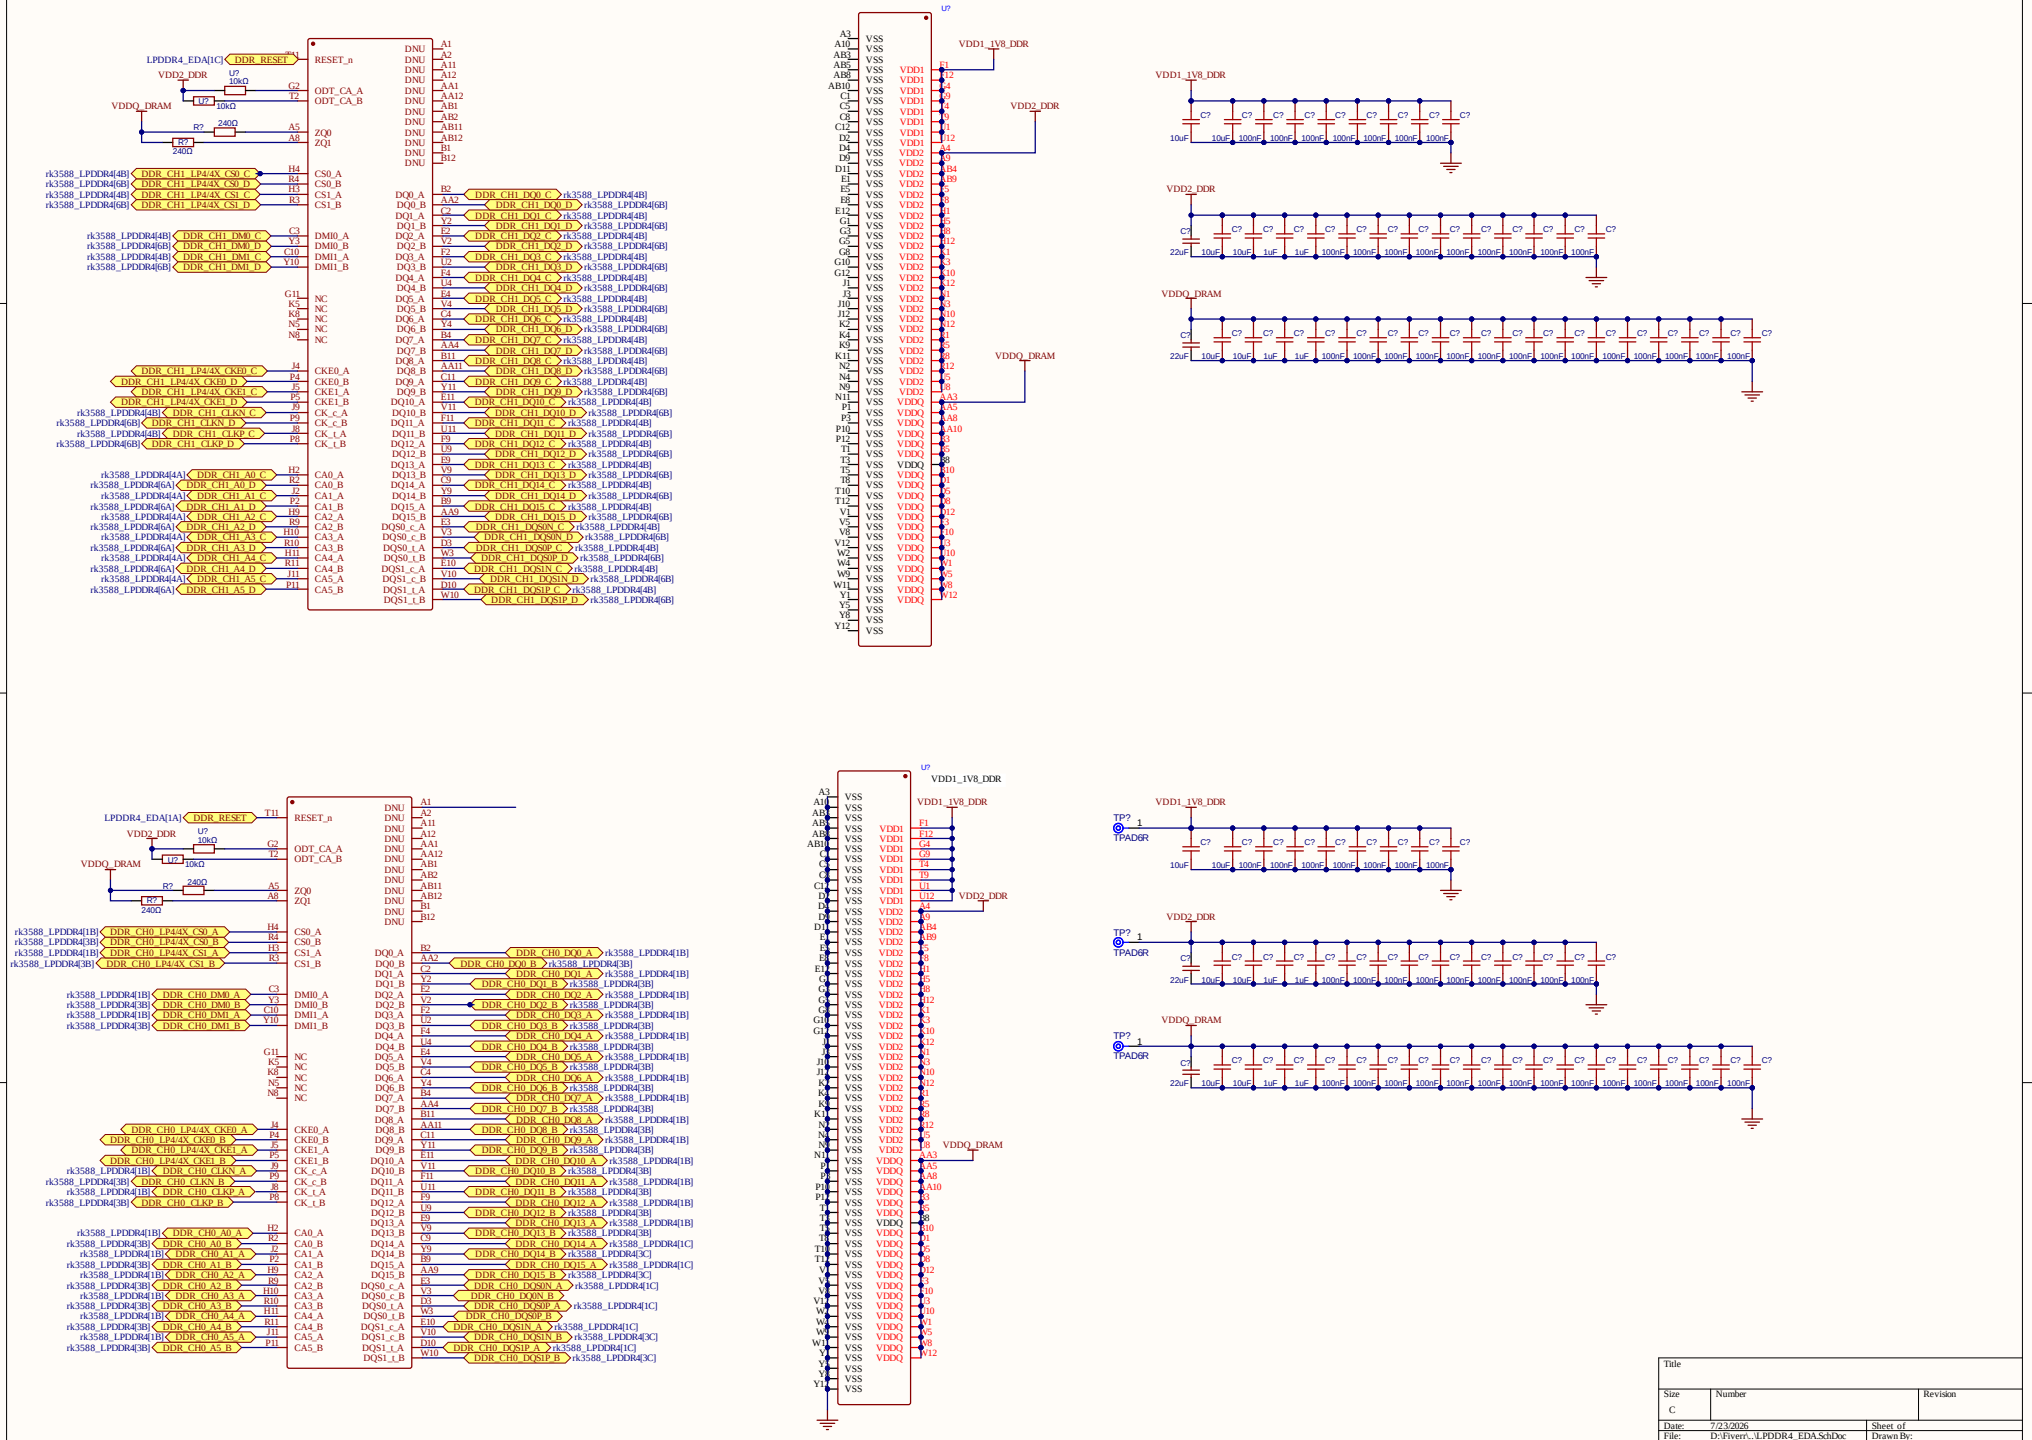

Title		
Size: C	Number	Revision
Date: 7/23/2026	Sheet of	
File: D:\Fiverr\..\LPDDR4_EDA.SchDoc	Drawn By:	

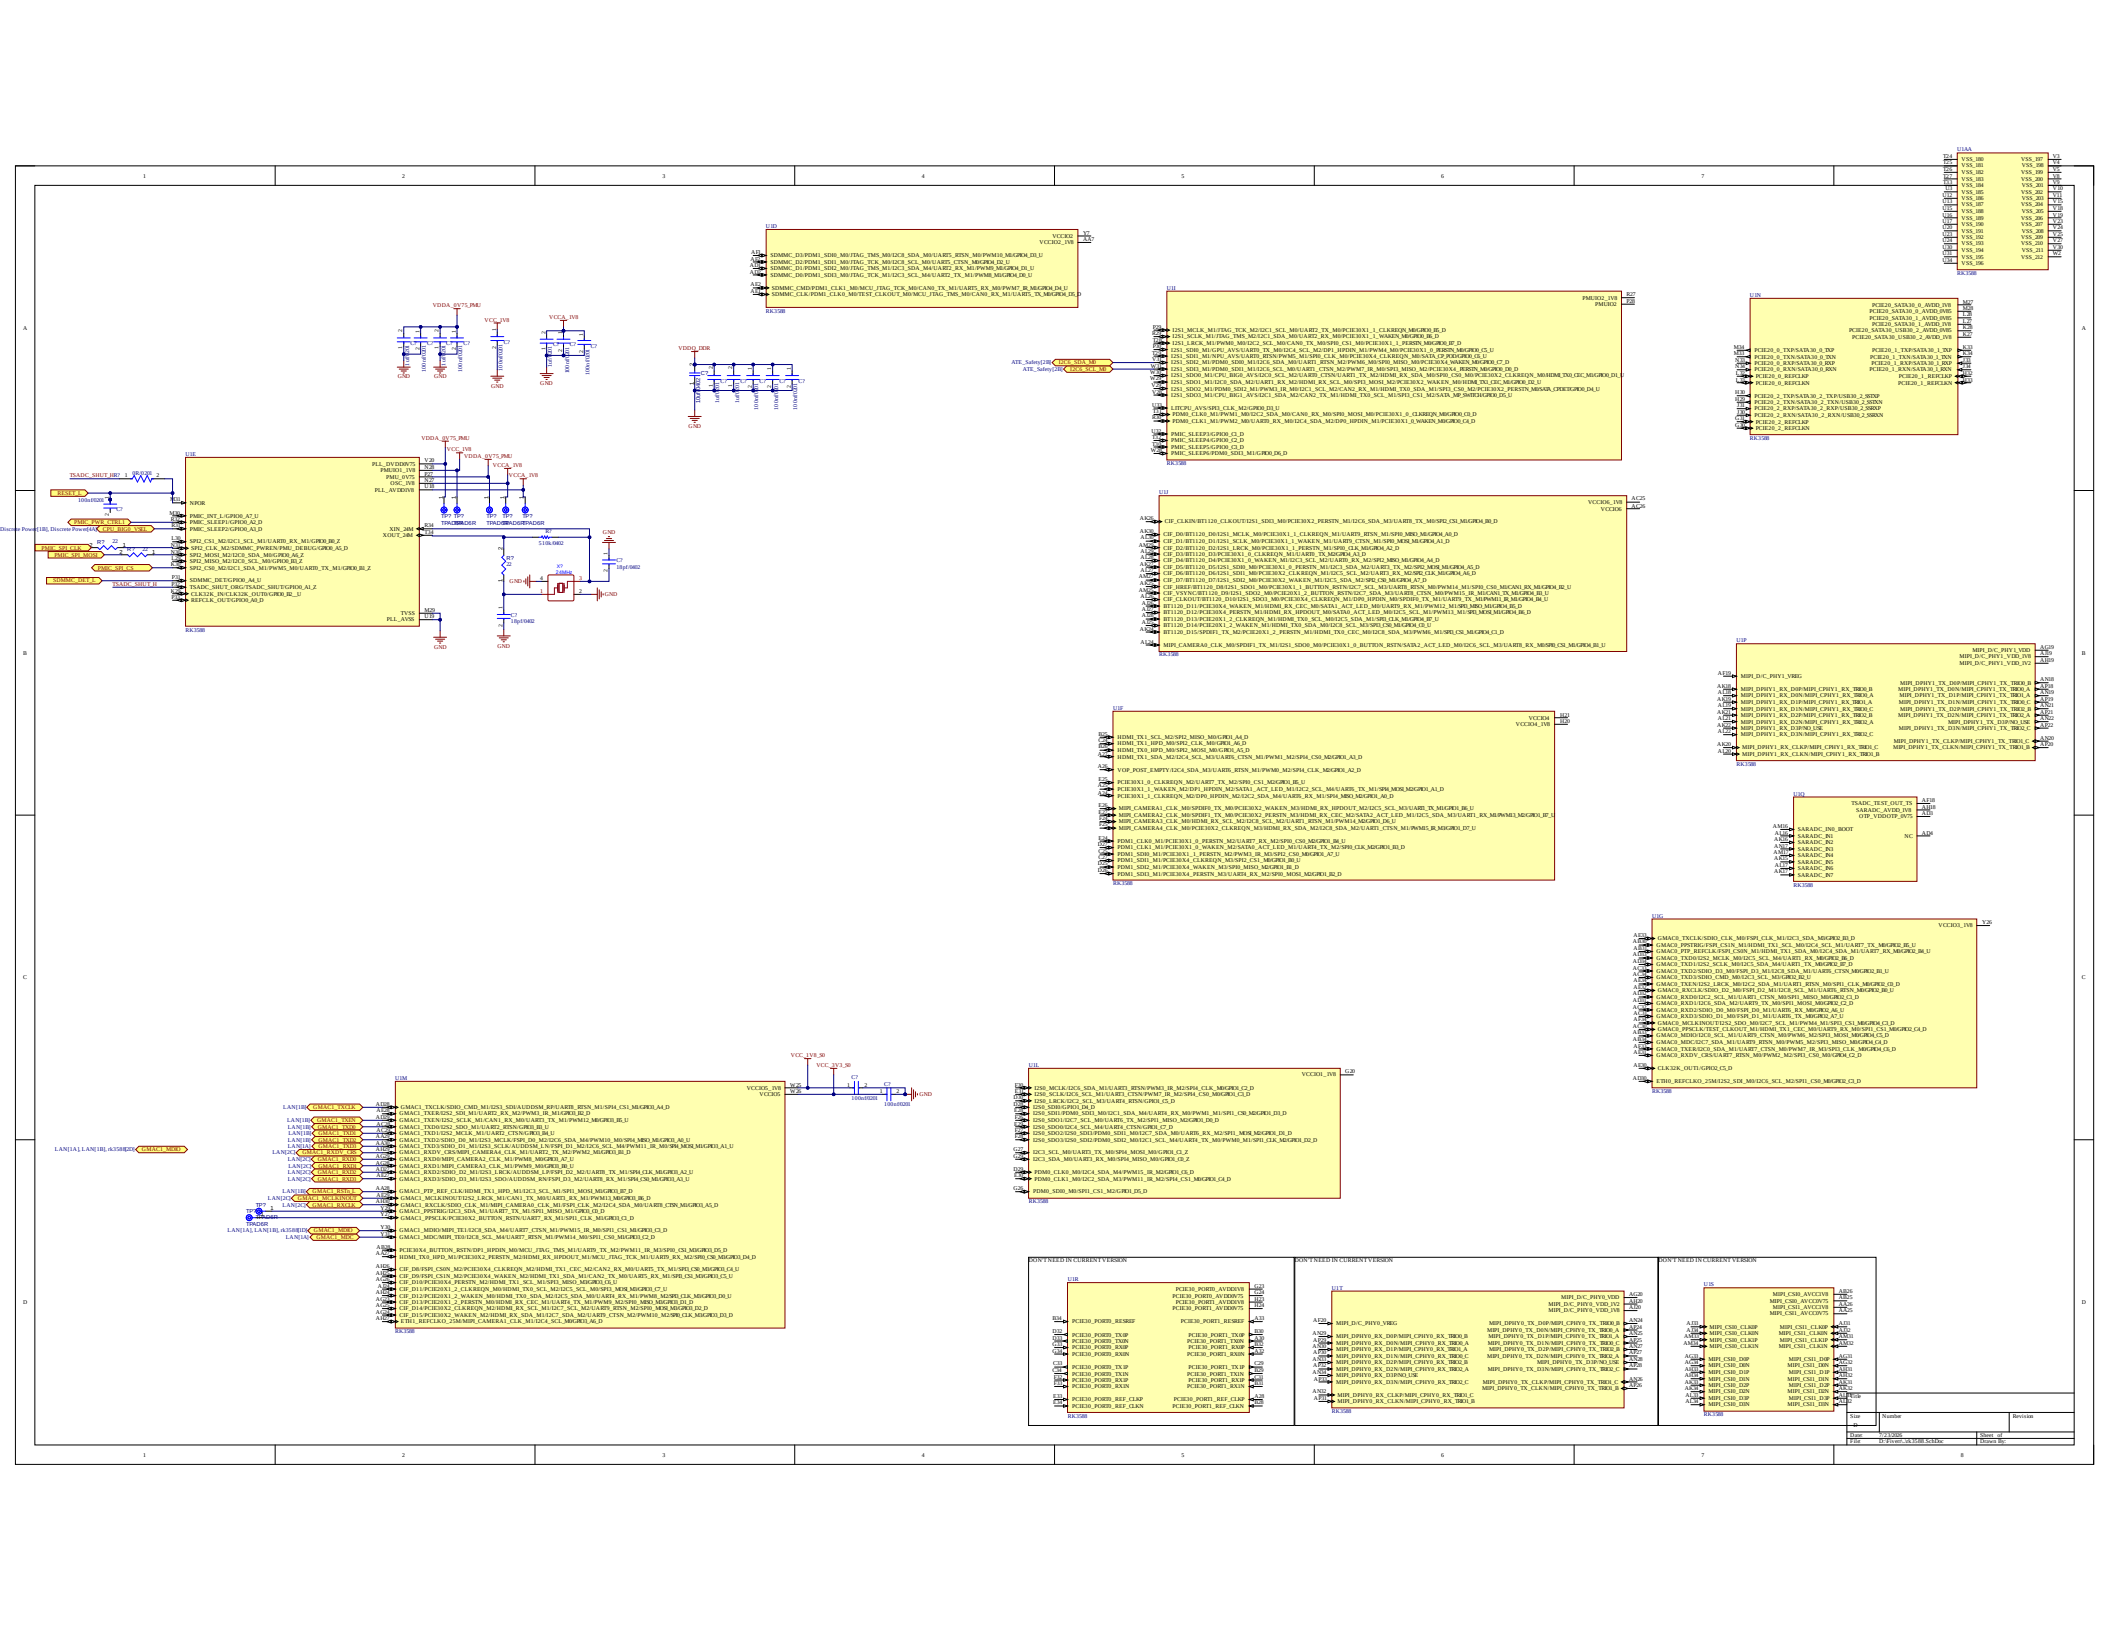
U1AA
U3D
U1U
U1T
U1N
U1P
U1Q
U1F
U1G
U1M
U1R
U1S
U1E
DON'T NEED IN CURRENT VERSION
DON'T NEED IN CURRENT VERSION
DON'T NEED IN CURRENT VERSION

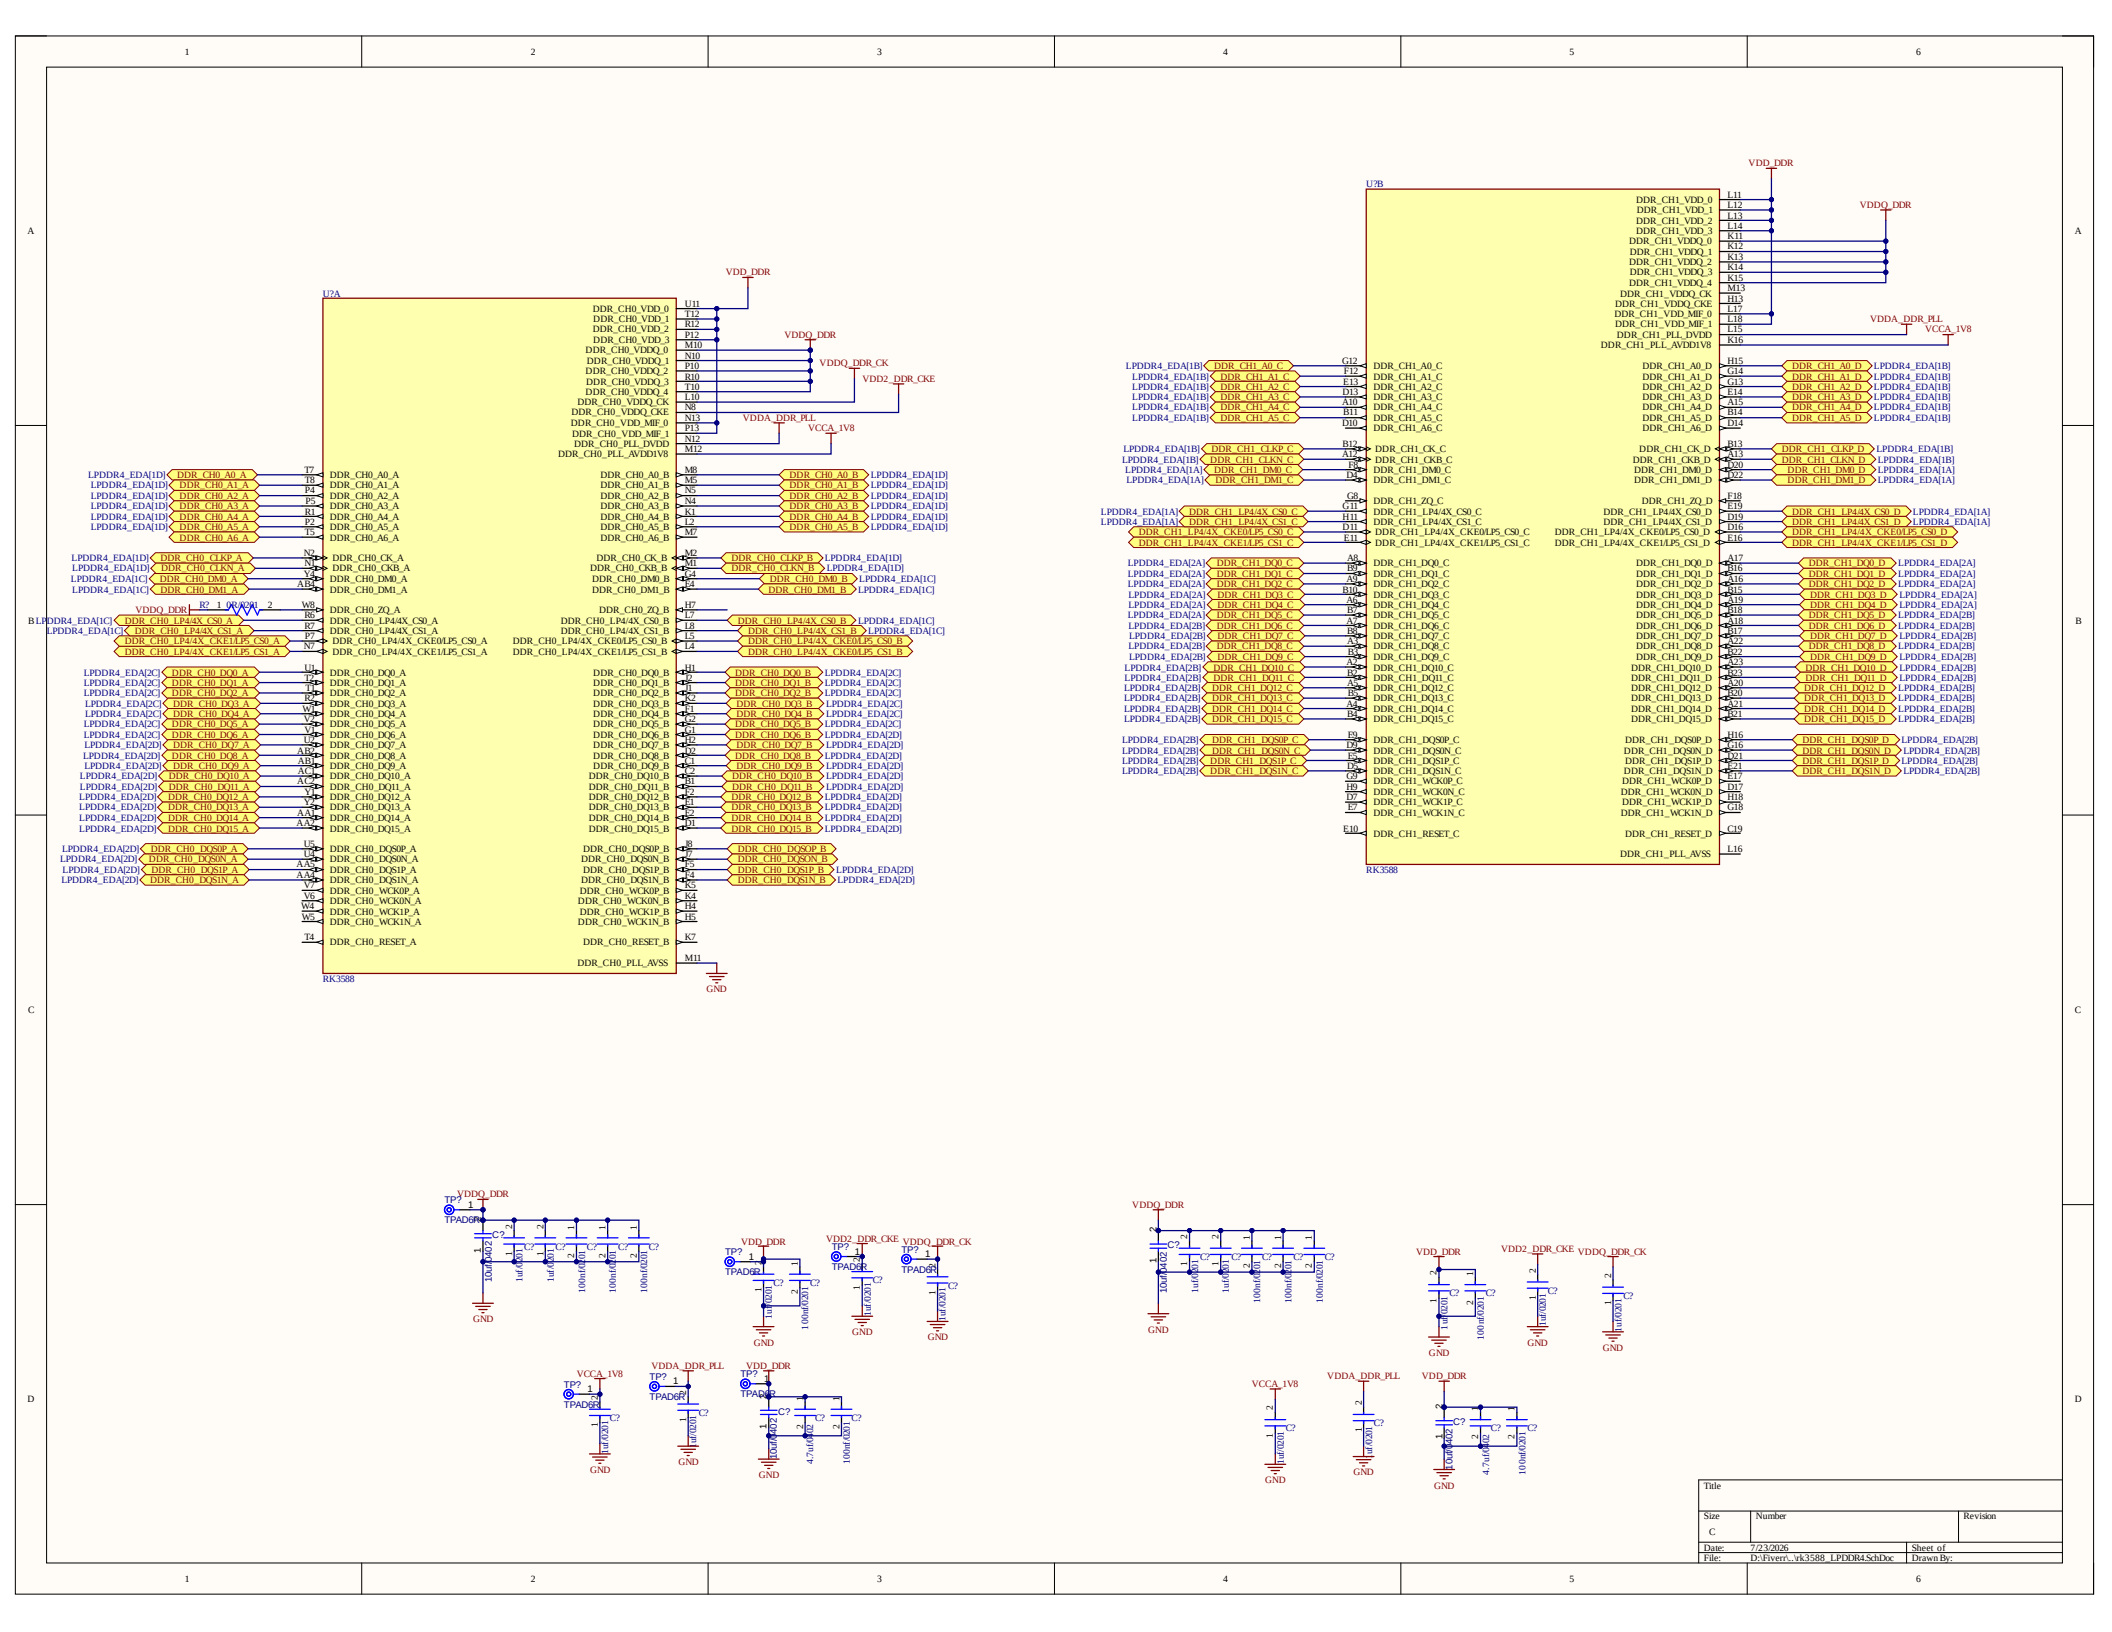
U2A
RK3588
U7B
RK3588
VDD_DDR
VDDQ_DDR
VDDQ_DDR_CK
VDD2_DDR_CKE
VDDA_DDR_PLL
VCCA_1V8
GND
Title
Size
C
Number
Revision
Date: 7/23/2026
Sheet of
File: D:\Fiverr\...\rk3588_LPDDR4.SchDoc
Drawn By:

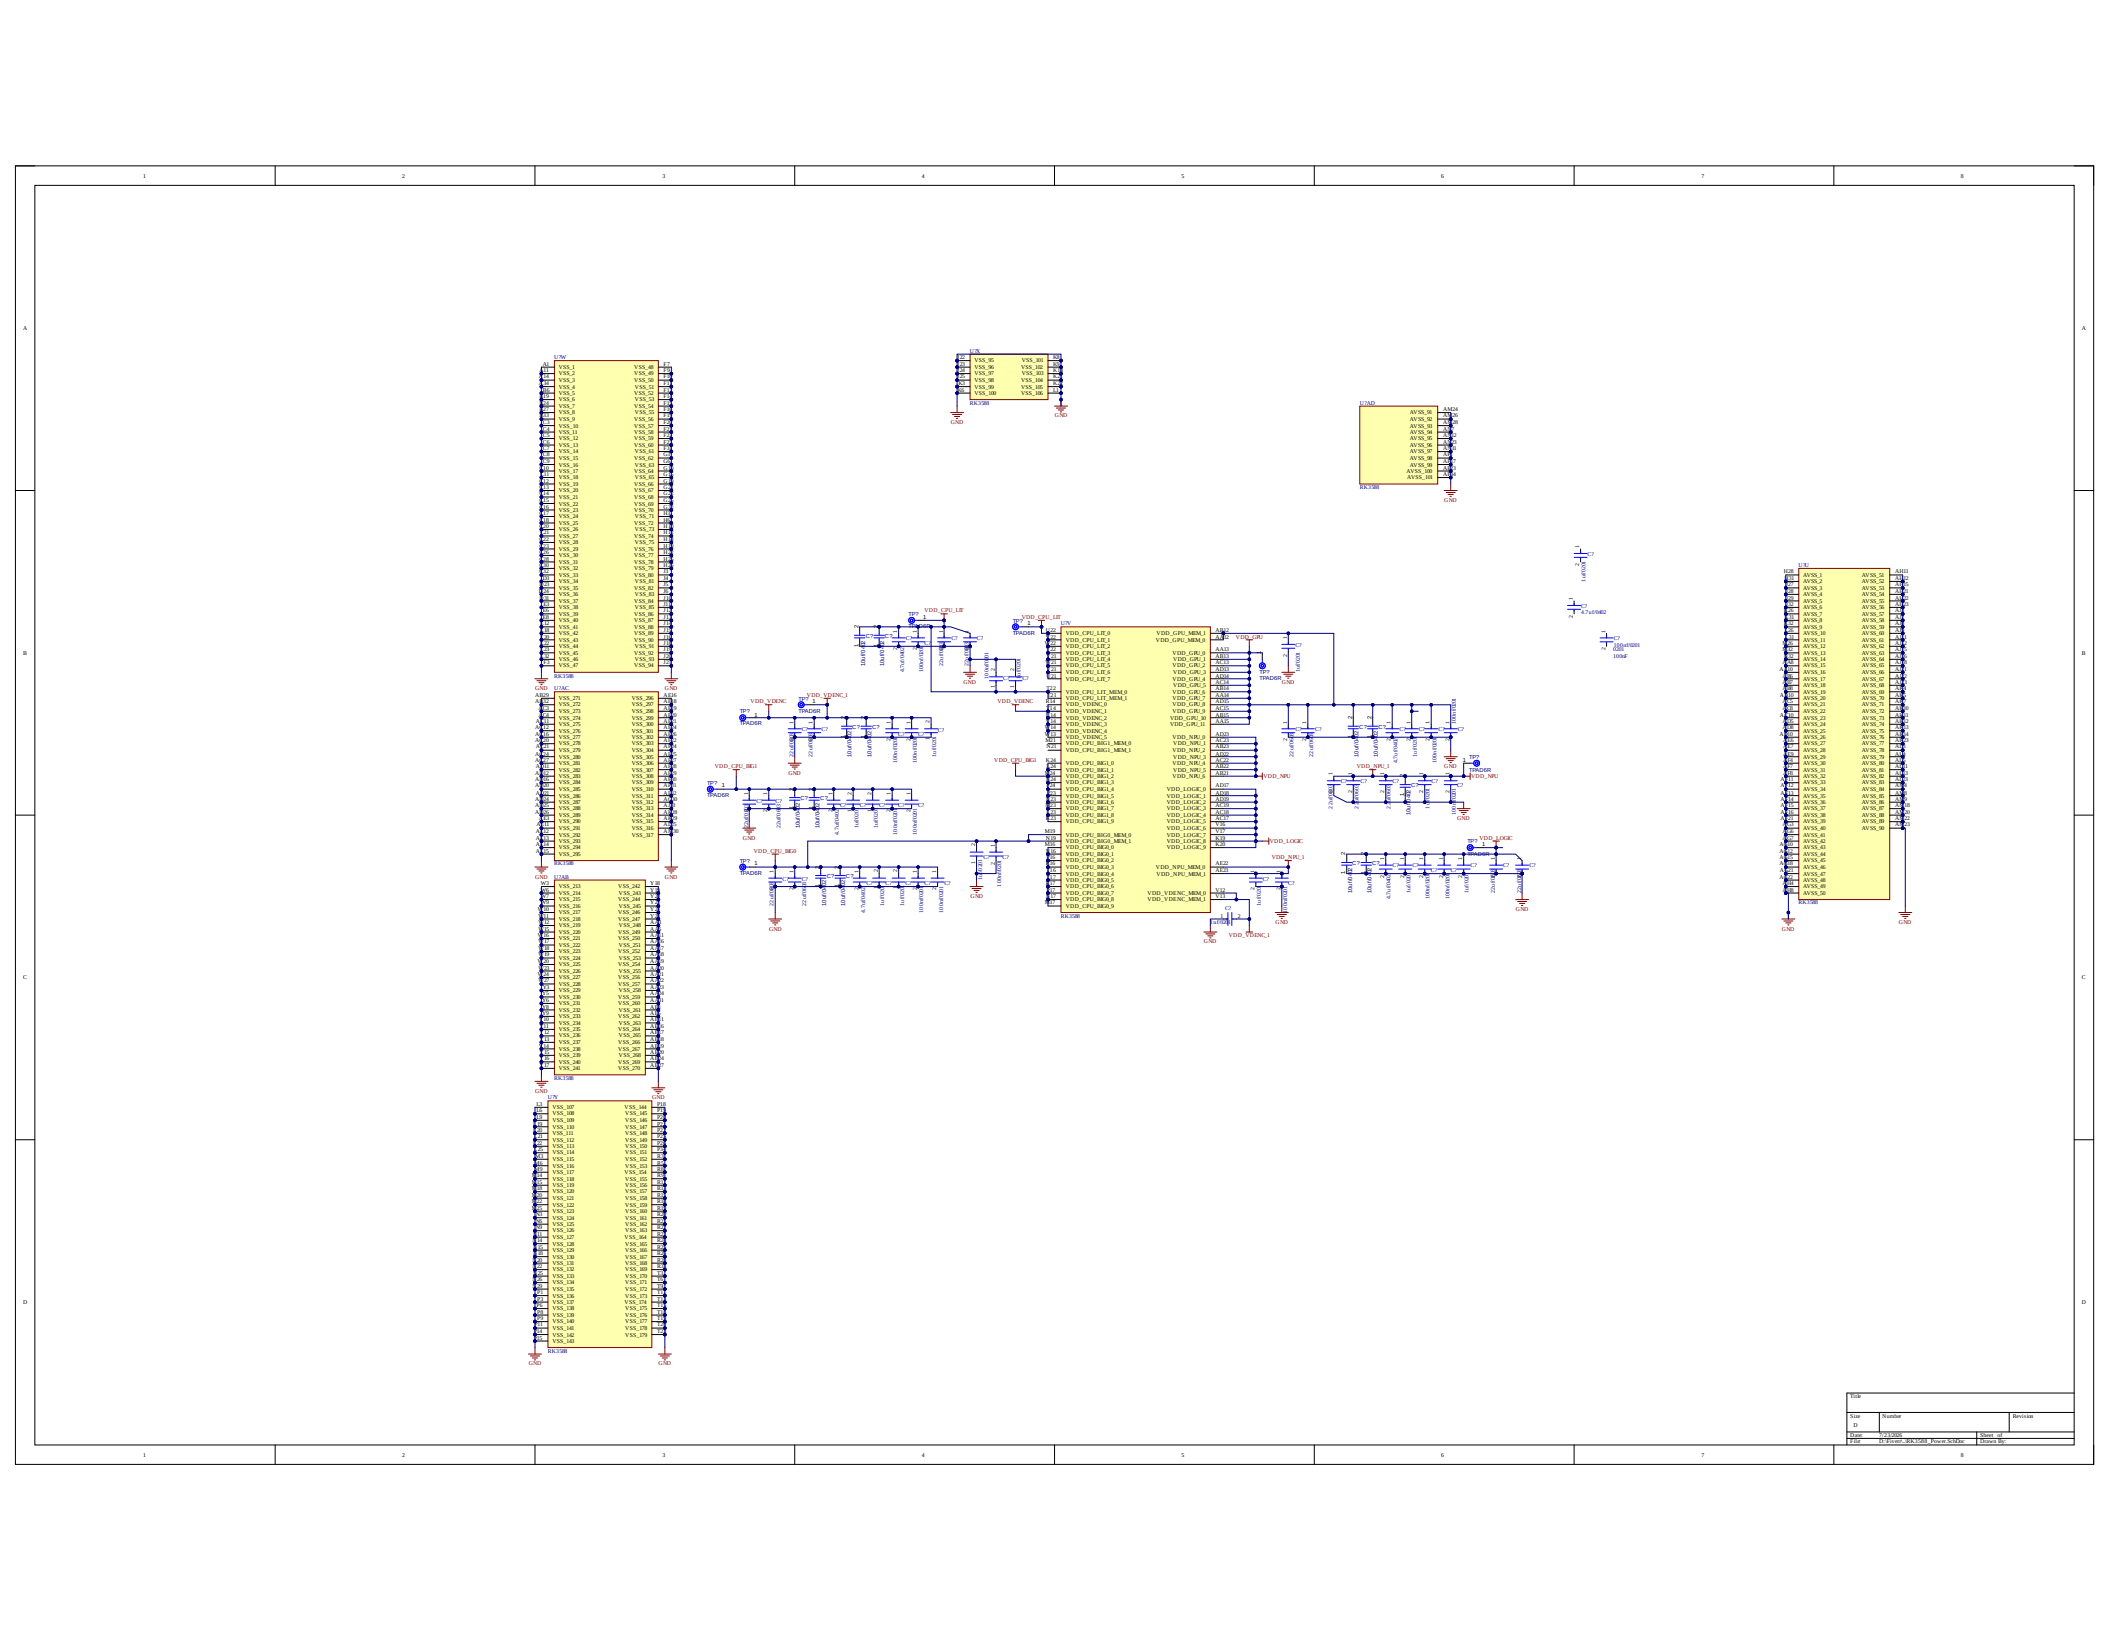
U3W
U3AC
U3AB
U3N
U2N
U2AD
U3U
U7N
RK3588
VDD_CPU_LIT
VDD_CPU_BIG1
VDD_CPU_BIG0
VDD_VDENC
VDD_VDENC_1
VDD_NPU
VDD_NPU_1
VDD_LOGIC
VDD_LOGIC_1
TPADSR
GND
Title
Size
D
Number
Revision
Date: 7/13/2026
File: D:\Project...RK3588_Power.SchDoc
Sheet of
Drawn By:

Note:
TYPEC0_USB20_OTG:

DP/DM:Must used for download
ID:According to demand,if not used,Leave floating
VBUSDET:Must provide
REXT:200ohm 1% resistor must be connected externally
Power: Must supply power

TYPEC1_USB20_OTG:


If not used:
DP/DM:Leave floating
ID:Leave floating
VBUSDET:Leave floating
REXT:Leave floating

USB20_HOST0/USB20_HOST1:


If not used:
DP/DM:Leave floating
REXT:Leave floating

Note:


The USB20_VBUSDET pin internal has a pull-down resistance(40K ohm) to ground,The resistance creates a voltage with the external series 30K ohm resistor.The VBUSDETpin voltage range <=3.3V.

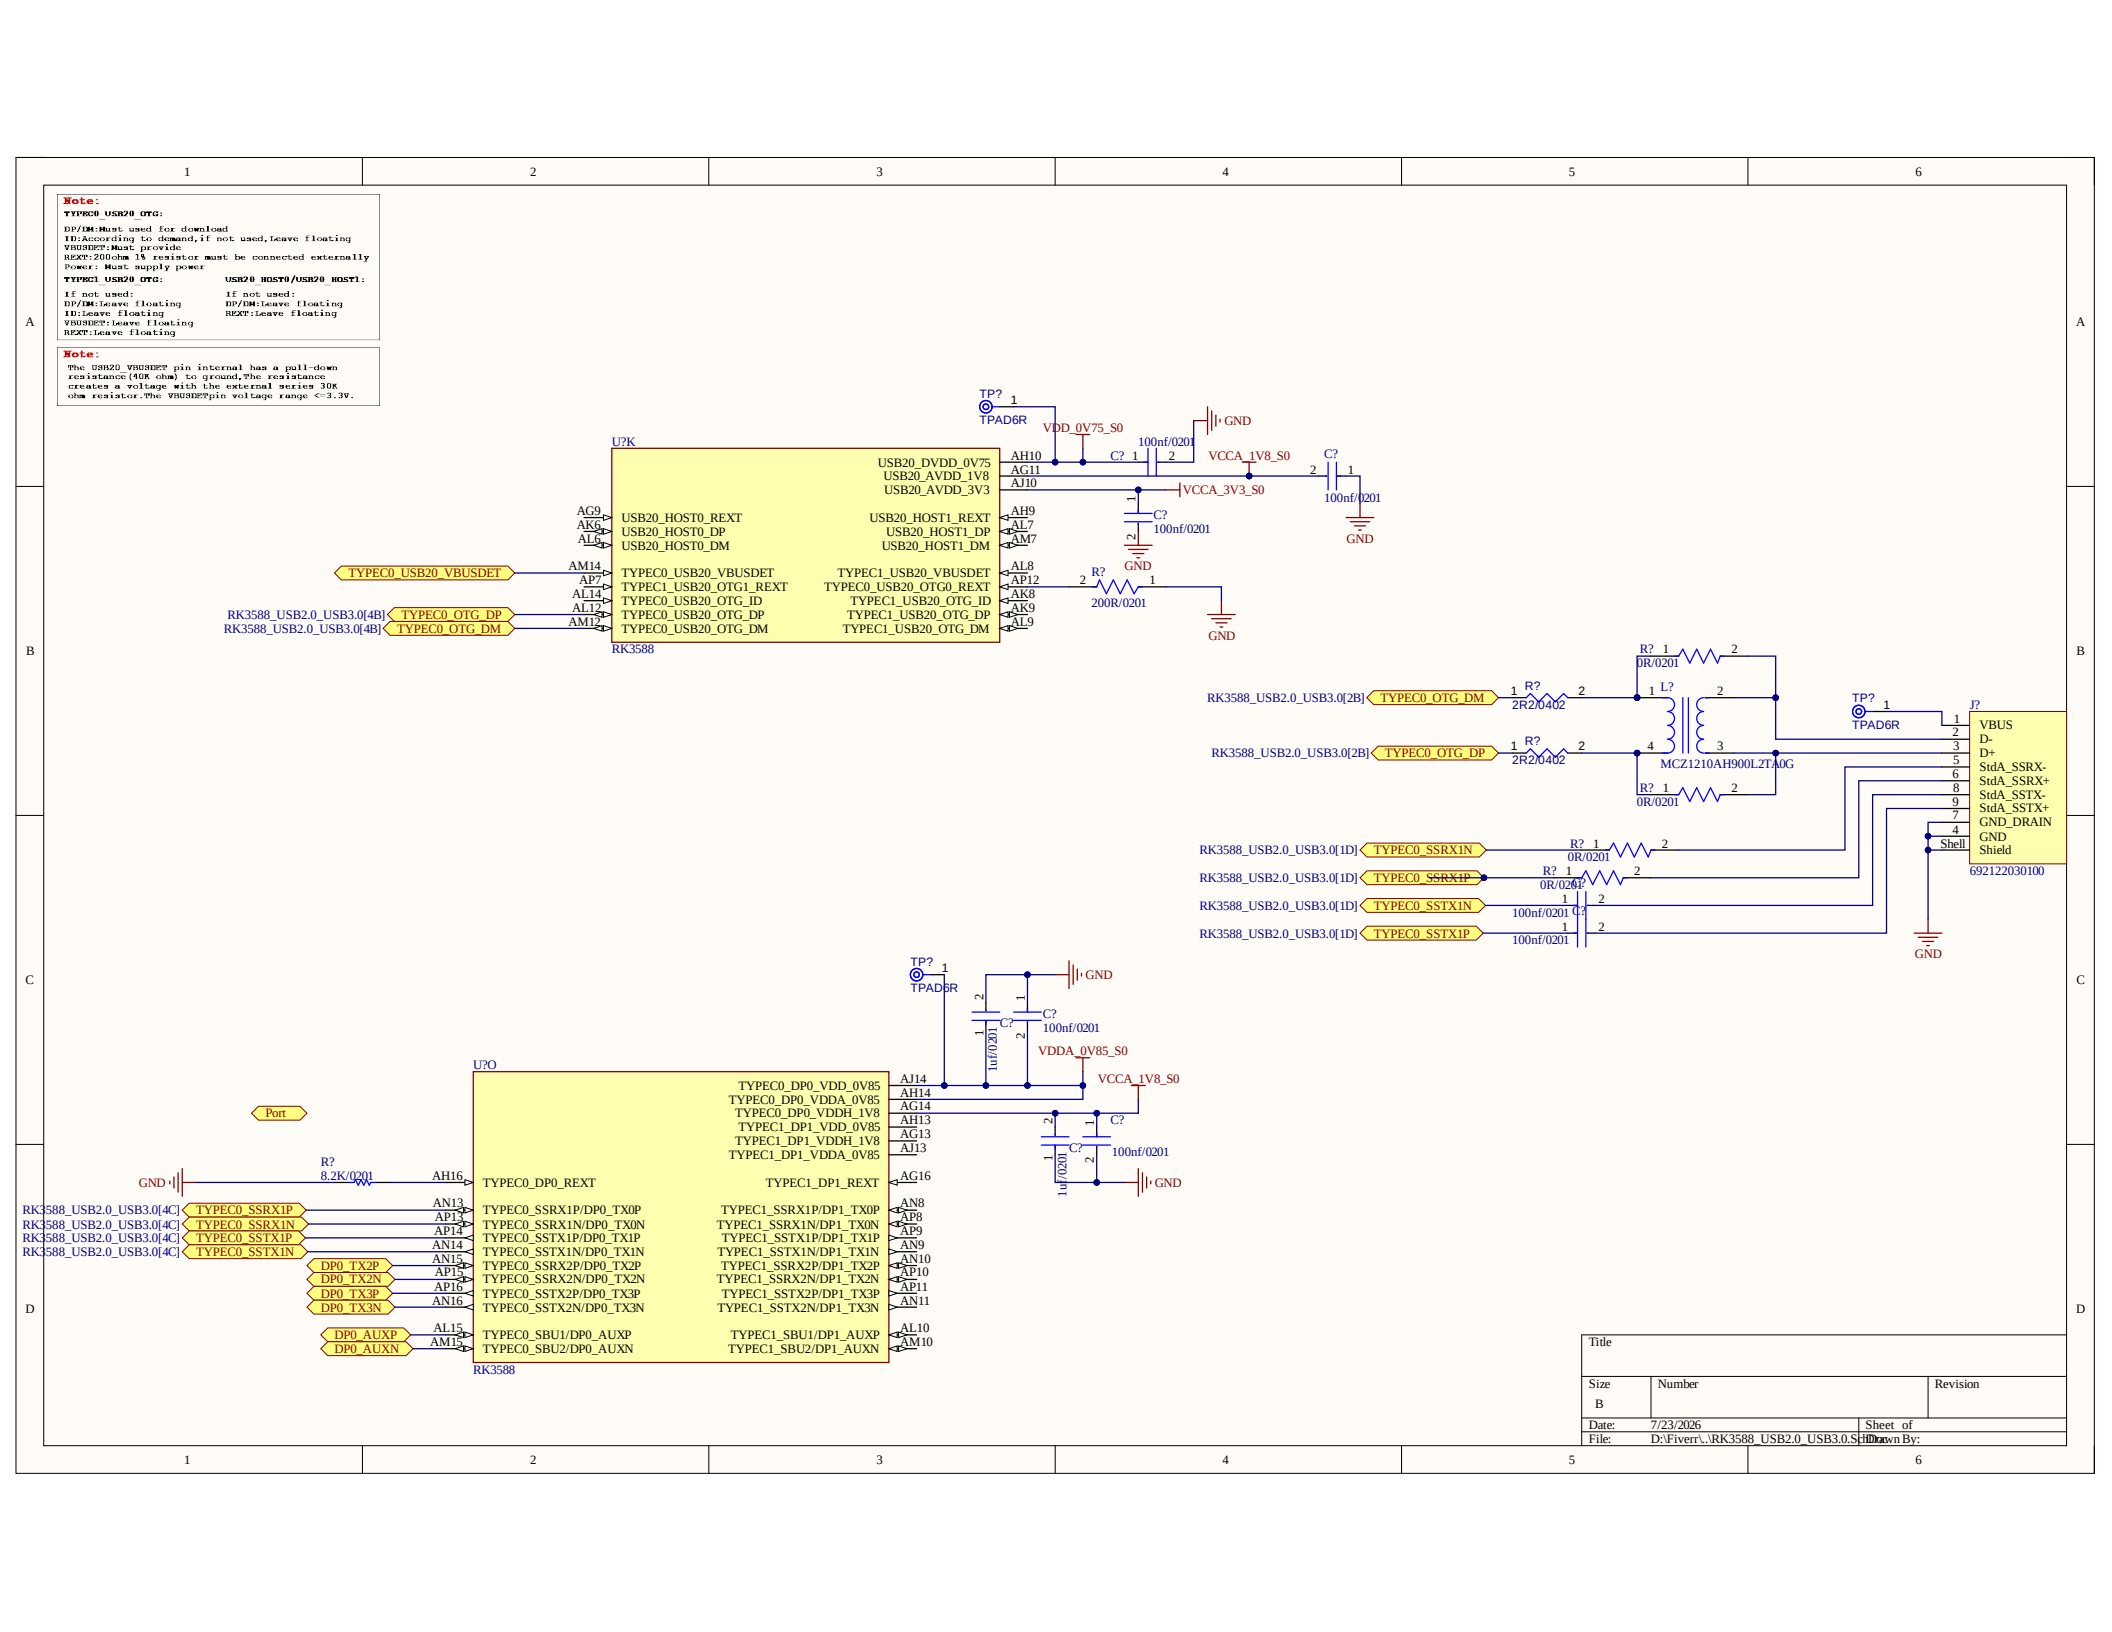

Title		
Size: B	Number	Revision
Date: 7/23/2026		Sheet of
File: D:\Fiverr\..\RK3588_USB2.0_USB3.0.SchDoc		Drawn By:

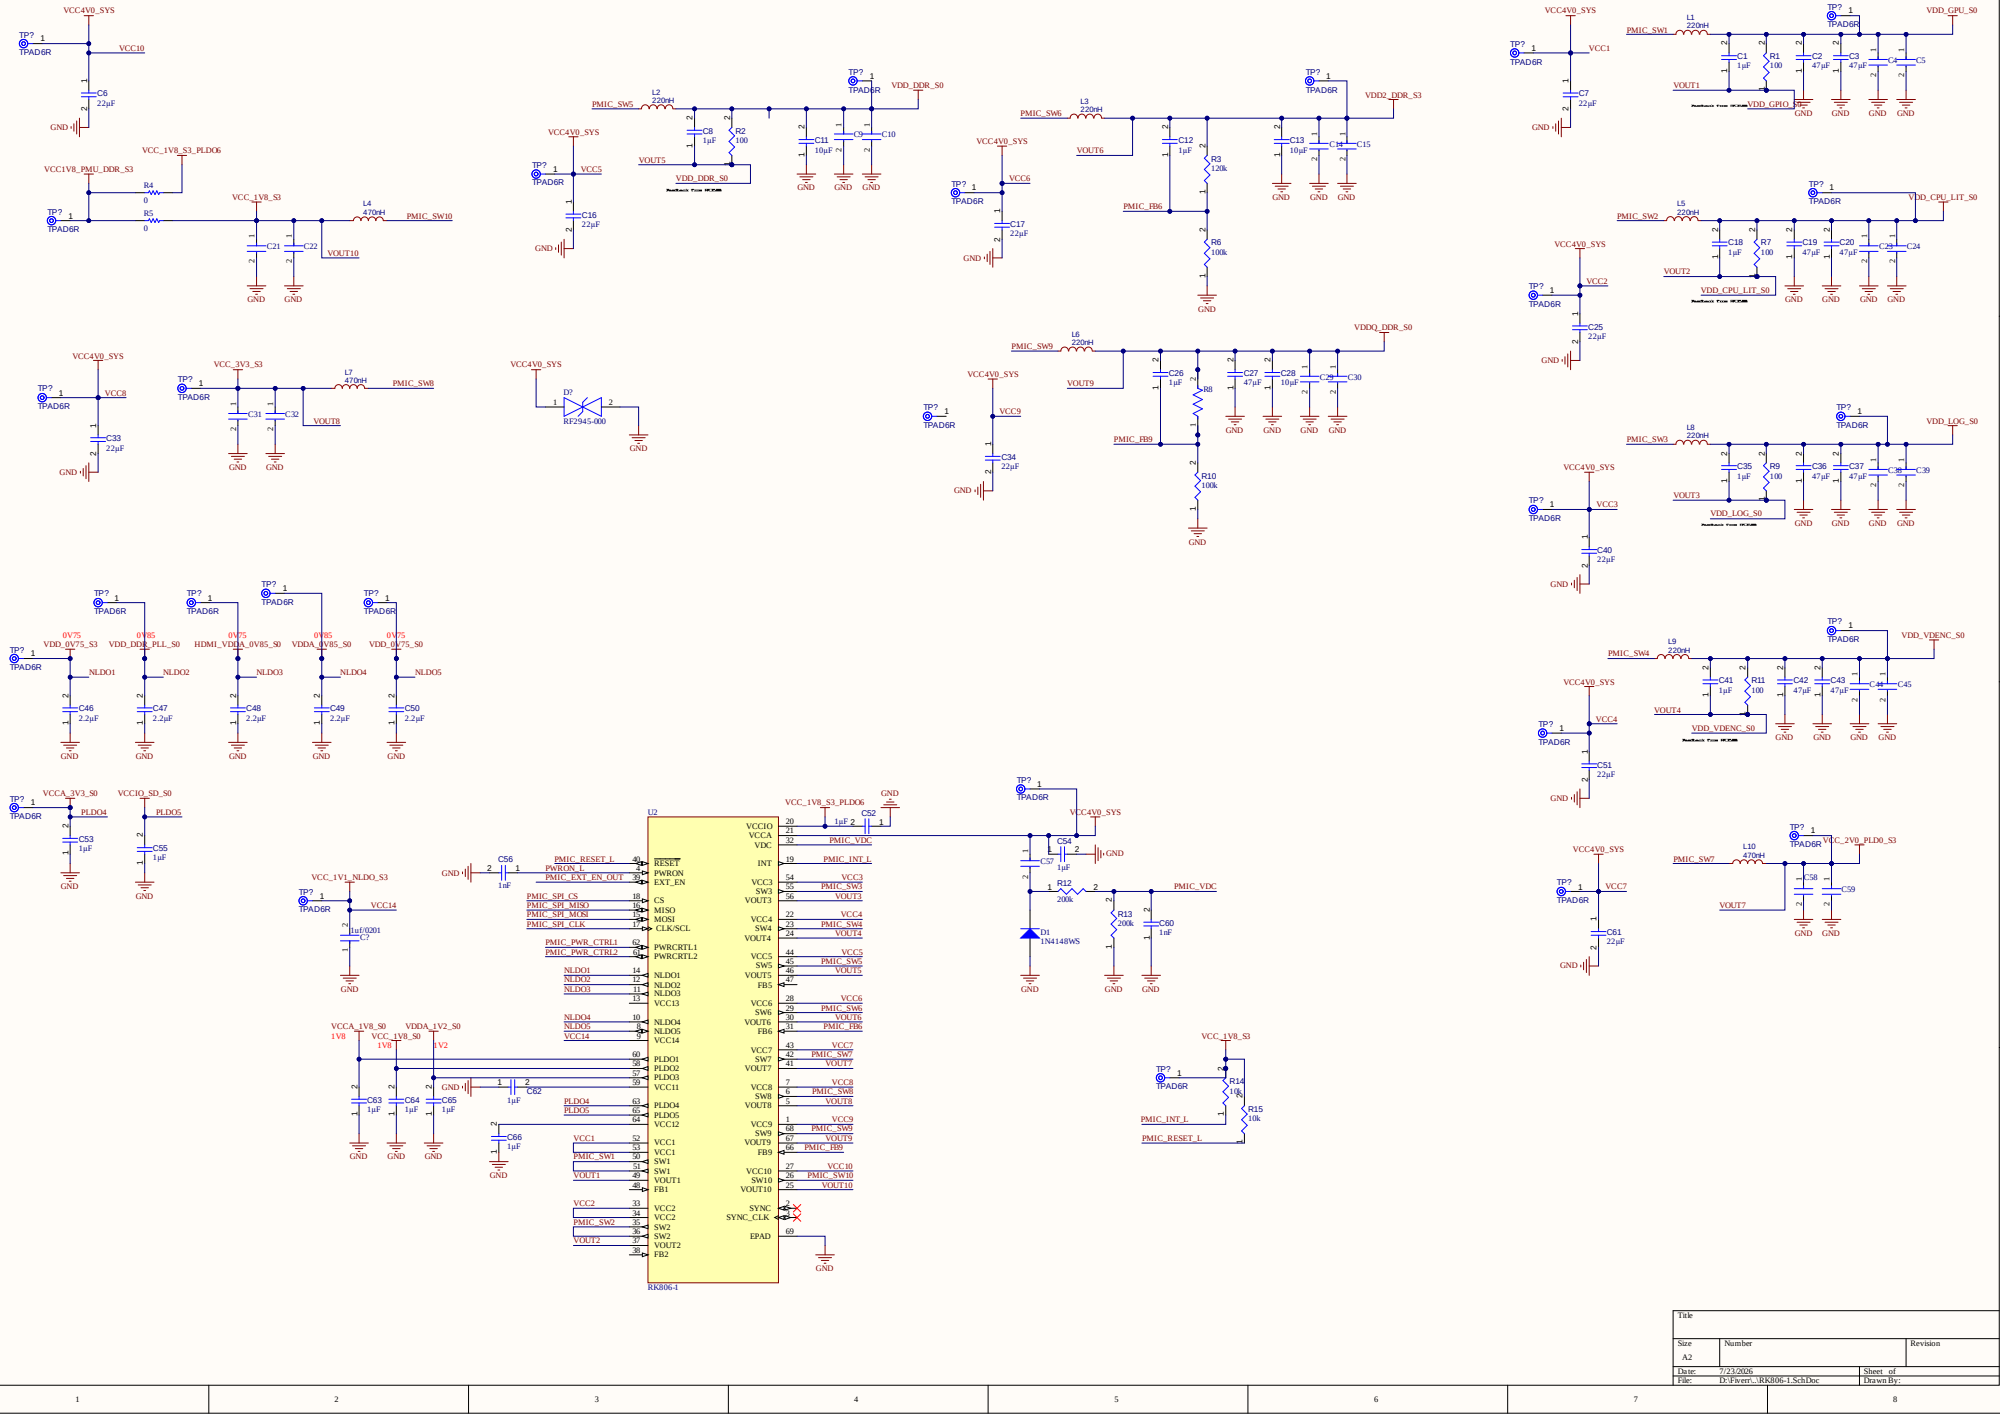

Title		
Size: A2	Number	Revision
Date: 7/23/2026		Sheet of
File: D:\Fiverr\...\RK806-1.SchDoc		Drawn By:

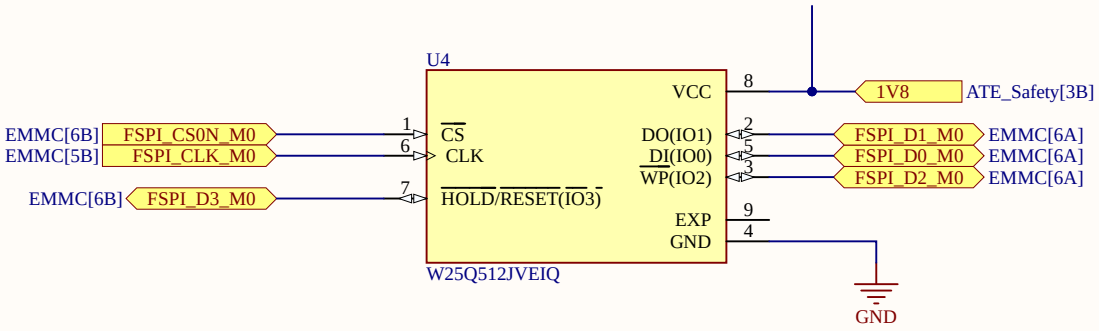

Title		
Size: A	Number	Revision
Date: 7/23/2026		Sheet of
File: D:\Fiverr\..\SPI _NOR.SchDoc		Drawn By: