

UNIVERSITY OF WAH(UOW)
DEPARTMENT OF COMPUTER
SCIENCE



Lab Task # 05

COURSE: Computer Networks Lab_241L


SUBMITTED TO: Mr. Hassan Shafaqat

SUBMITTED BY: Muhammad Talha_CS.3ndB


Registration NO: UW-24-CS-BS-101

Task


- Adding switching to screen

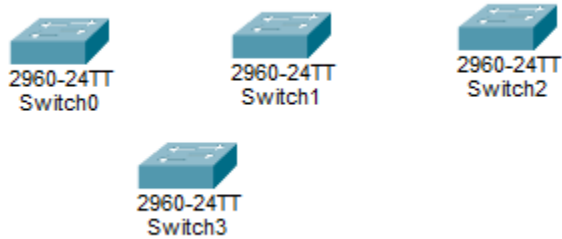

- Adding computer and laptops to screen

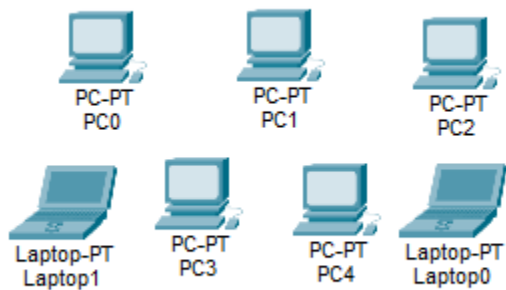

- Arranging in given format

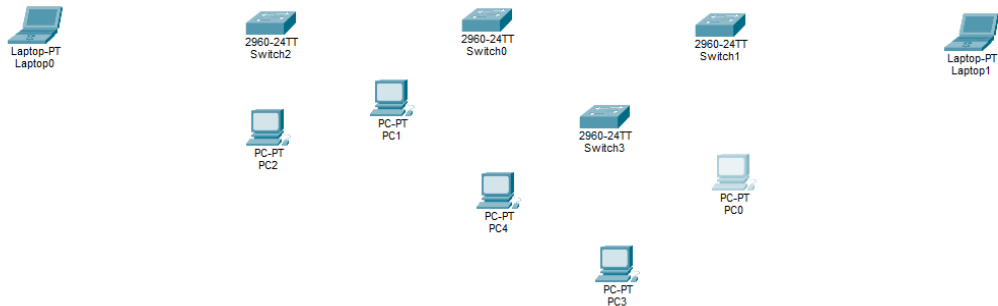

- Now giving IP Address to PC and Laptops according to Reg no

Lap 1

IP Configuration	
☐ DHCP	☒ Static
IPv4 Address	192.168.1.101
Subnet Mask	255.255.255.0
Default Gateway	0.0.0.0

Lap 2

IPv4 Address	192.168.1.102
Subnet Mask	255.255.255.0

Computer 1

IP Configuration

☐ DHCP ☒ Static

IPv4 Address

Subnet Mask

Computer 2

IP Configuration

☐ DHCP ☒ Static

IPv4 Address

Subnet Mask

Computer 3

IP Configuration

☐ DHCP ☒ Static

IPv4 Address

Subnet Mask

Computer 4

IP Configuration

☐ DHCP ☒ Static

IPv4 Address

Subnet Mask

Computer 5

IP Configuration

☐ DHCP ☒ Static


IPv4 Address

Subnet Mask


- Connecting Laptops to switches with straight wires



- Connecting PC to Switches with straight wires

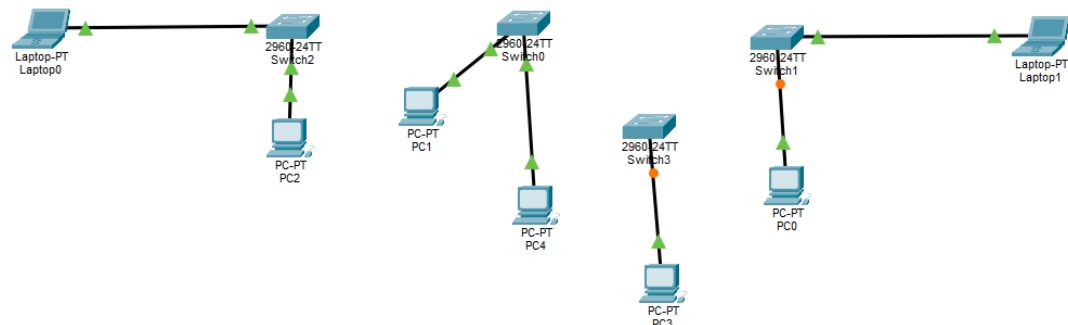

- Connecting Switches to switches with copper cross wire

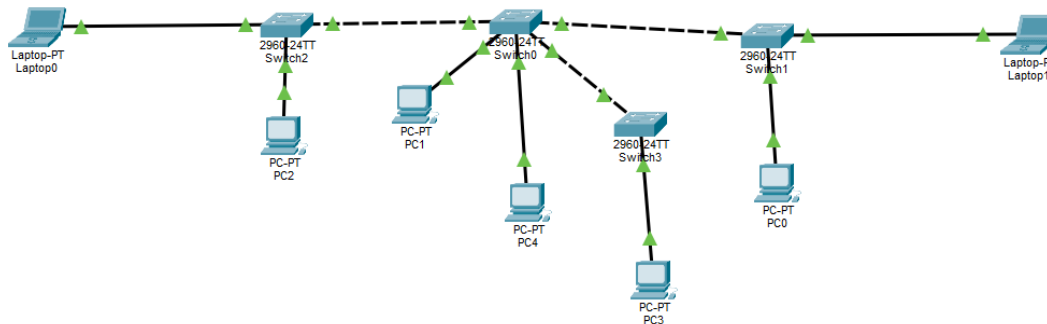

Now sending messaging using ping command line

- From Lap 1(192.168.1.101) to all devices

```

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.102

Pinging 192.168.1.102 with 32 bytes of data:

Reply from 192.168.1.102: bytes=32 time=10ms TTL=128
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128
Reply from 192.168.1.102: bytes=32 time=1ms TTL=128
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.102:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2ms
  
```

```

Pinging 192.168.1.103 with 32 bytes of data:

Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
Reply from 192.168.1.103: bytes=32 time=1ms TTL=128
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.103:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
  
```

```

Pinging 192.168.1.104 with 32 bytes of data:

Reply from 192.168.1.104: bytes=32 time<1ms TTL=128
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.104:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
  
```

```

C:\>ping 192.168.1.105

Pinging 192.168.1.105 with 32 bytes of data:

Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.105:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
  
```

```
C:\>ping 192.168.1.106
```

```
Pinging 192.168.1.106 with 32 bytes of data:
```

```
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.106:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.107
```

```
Pinging 192.168.1.107 with 32 bytes of data:
```

```
Reply from 192.168.1.107: bytes=32 time=1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.107:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

- From Lap 2 (192.168.1.107) to all devices

```
C:\>ping 192.168.1.101
```

```
Pinging 192.168.1.101 with 32 bytes of data:
```

```
Reply from 192.168.1.101: bytes=32 time=13ms TTL=128  
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.101: bytes=32 time=1ms TTL=128
```

```
Ping statistics for 192.168.1.101:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 13ms, Average = 3ms
```

```
C:\>ping 192.168.1.103
```

```
Pinging 192.168.1.103 with 32 bytes of data:
```

```
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.103:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Pinging 192.168.1.104 with 32 bytes of data:
```

```
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.104:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.105
```

```
Pinging 192.168.1.105 with 32 bytes of data:
```

```
Reply from 192.168.1.105: bytes=32 time=11ms TTL=128  
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.105:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 0ms, Maximum = 11ms, Average = 2ms
```

```
C:\>ping 192.168.1.106
```

```
Pinging 192.168.1.106 with 32 bytes of data:
```

```
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.106:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.107
```

```
Pinging 192.168.1.107 with 32 bytes of data:
```

```
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.107:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

- From Computer 1 (192.168.1.103) to all devices

```
C:\>ping 192.168.1.101
```

```
Pinging 192.168.1.101 with 32 bytes of data:
```

```
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.101: bytes=32 time=2ms TTL=128
```

```
Ping statistics for 192.168.1.101:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 0ms, Maximum = 2ms, Average = 0ms
```

```
C:\>ping 192.168.1.102
```

```
Pinging 192.168.1.102 with 32 bytes of data:
```

```
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.102: bytes=32 time=1ms TTL=128
```

```
Ping statistics for 192.168.1.102:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\>ping 192.168.1.104

Pinging 192.168.1.104 with 32 bytes of data:

Reply from 192.168.1.104: bytes=32 time<1ms TTL=128
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.104:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.105

Pinging 192.168.1.105 with 32 bytes of data:

Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.105:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.106

Pinging 192.168.1.106 with 32 bytes of data:

Reply from 192.168.1.106: bytes=32 time=10ms TTL=128
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128
Reply from 192.168.1.106: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.106:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 10ms, Average = 2ms
```

```
C:\>ping 192.168.1.107

Pinging 192.168.1.107 with 32 bytes of data:

Reply from 192.168.1.107: bytes=32 time<1ms TTL=128
Reply from 192.168.1.107: bytes=32 time=2ms TTL=128
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128
Reply from 192.168.1.107: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.107:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 2ms, Average = 0ms
```

- From Computer 2 (192.168.1.104) to all devices

```
C:\>ping 192.168.1.101

Pinging 192.168.1.101 with 32 bytes of data:

Reply from 192.168.1.101: bytes=32 time<1ms TTL=128
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.101:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.102
```

```
Pinging 192.168.1.102 with 32 bytes of data:
```

```
Reply from 192.168.1.102: bytes=32 time=1ms TTL=128  
Reply from 192.168.1.102: bytes=32 time=1ms TTL=128  
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.102:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\>ping 192.168.1.103
```

```
Pinging 192.168.1.103 with 32 bytes of data:
```

```
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.103:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.105
```

```
Pinging 192.168.1.105 with 32 bytes of data:
```

```
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.105: bytes=32 time=1ms TTL=128  
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.105:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\>ping 192.168.1.106
```

```
Pinging 192.168.1.106 with 32 bytes of data:
```

```
Reply from 192.168.1.106: bytes=32 time=1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.106:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\>ping 192.168.1.107
```

```
Pinging 192.168.1.107 with 32 bytes of data:
```

```
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time=1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.107:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

- From Computer 3 (192.168.1.105) to all devices

```
C:\>ping 192.168.1.101
```

```
Pinging 192.168.1.101 with 32 bytes of data:
```

```
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128
Reply from 192.168.1.101: bytes=32 time=1ms TTL=128
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.101:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\>ping 192.168.1.102
```

```
Pinging 192.168.1.102 with 32 bytes of data:
```

```
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128
Reply from 192.168.1.102: bytes=32 time=10ms TTL=128
Reply from 192.168.1.102: bytes=32 time=10ms TTL=128
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.102:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 10ms, Average = 5ms
```

```
C:\>ping 192.168.1.103
```

```
Pinging 192.168.1.103 with 32 bytes of data:
```

```
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.103:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.106
```

```
Pinging 192.168.1.106 with 32 bytes of data:
```

```
Reply from 192.168.1.106: bytes=32 time=11ms TTL=128
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.106:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 11ms, Average = 2ms
```

```
C:\>ping 192.168.1.107
```

```
Pinging 192.168.1.107 with 32 bytes of data:
```

```
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.107:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

- From Computer 4 (192.168.1.106) to all devices

```
C:\>ping 192.168.1.101
```

```
Pinging 192.168.1.101 with 32 bytes of data:
```

```
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.101:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.102
```

```
Pinging 192.168.1.102 with 32 bytes of data:
```

```
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128
Reply from 192.168.1.102: bytes=32 time=7ms TTL=128
Reply from 192.168.1.102: bytes=32 time=1ms TTL=128
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.102:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 7ms, Average = 2ms
```

```
C:\>ping 192.168.1.103
```

```
Pinging 192.168.1.103 with 32 bytes of data:
```

```
Reply from 192.168.1.103: bytes=32 time=10ms TTL=128
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.103:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 10ms, Average = 2ms
```

```
C:\>ping 192.168.1.104
```

```
Pinging 192.168.1.104 with 32 bytes of data:
```

```
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128
Reply from 192.168.1.104: bytes=32 time=1ms TTL=128
```

```
Ping statistics for 192.168.1.104:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\>ping 192.168.1.105
```

```
Pinging 192.168.1.105 with 32 bytes of data:
```

```
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
Reply from 192.168.1.105: bytes=32 time=1ms TTL=128
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.105:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\>ping 192.168.1.107
```

```
Pinging 192.168.1.107 with 32 bytes of data:
```

```
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time=1ms TTL=128  
Reply from 192.168.1.107: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.107:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

- From Computer 5 (192.168.1.107) to all devices

```
C:\>ping 192.168.1.101
```

```
Pinging 192.168.1.101 with 32 bytes of data:
```

```
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.101: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.101:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.102
```

```
Pinging 192.168.1.102 with 32 bytes of data:
```

```
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.102: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.102:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.103
```

```
Pinging 192.168.1.103 with 32 bytes of data:
```

```
Reply from 192.168.1.103: bytes=32 time=17ms TTL=128  
Reply from 192.168.1.103: bytes=32 time=1ms TTL=128  
Reply from 192.168.1.103: bytes=32 time=8ms TTL=128  
Reply from 192.168.1.103: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.103:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 0ms, Maximum = 17ms, Average = 6ms
```

```
C:\>ping 192.168.1.104
```

```
Pinging 192.168.1.104 with 32 bytes of data:
```

```
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.104: bytes=32 time=1ms TTL=128  
Reply from 192.168.1.104: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.104:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\>ping 192.168.1.105
```

```
Pinging 192.168.1.105 with 32 bytes of data:
```

```
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.105: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.105:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.1.106
```

```
Pinging 192.168.1.106 with 32 bytes of data:
```

```
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128  
Reply from 192.168.1.106: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 192.168.1.106:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```