

University of Wah

Department of Computer Science



Submit to:

Ms. Wasifa Kanwal

Submit by:

Muhammad Talha

Course:

Information and Security Lab - CS-251L



Reg No:

UW-24-CS-BS-101

Section:

BS-CS-3rd-B

Task 1

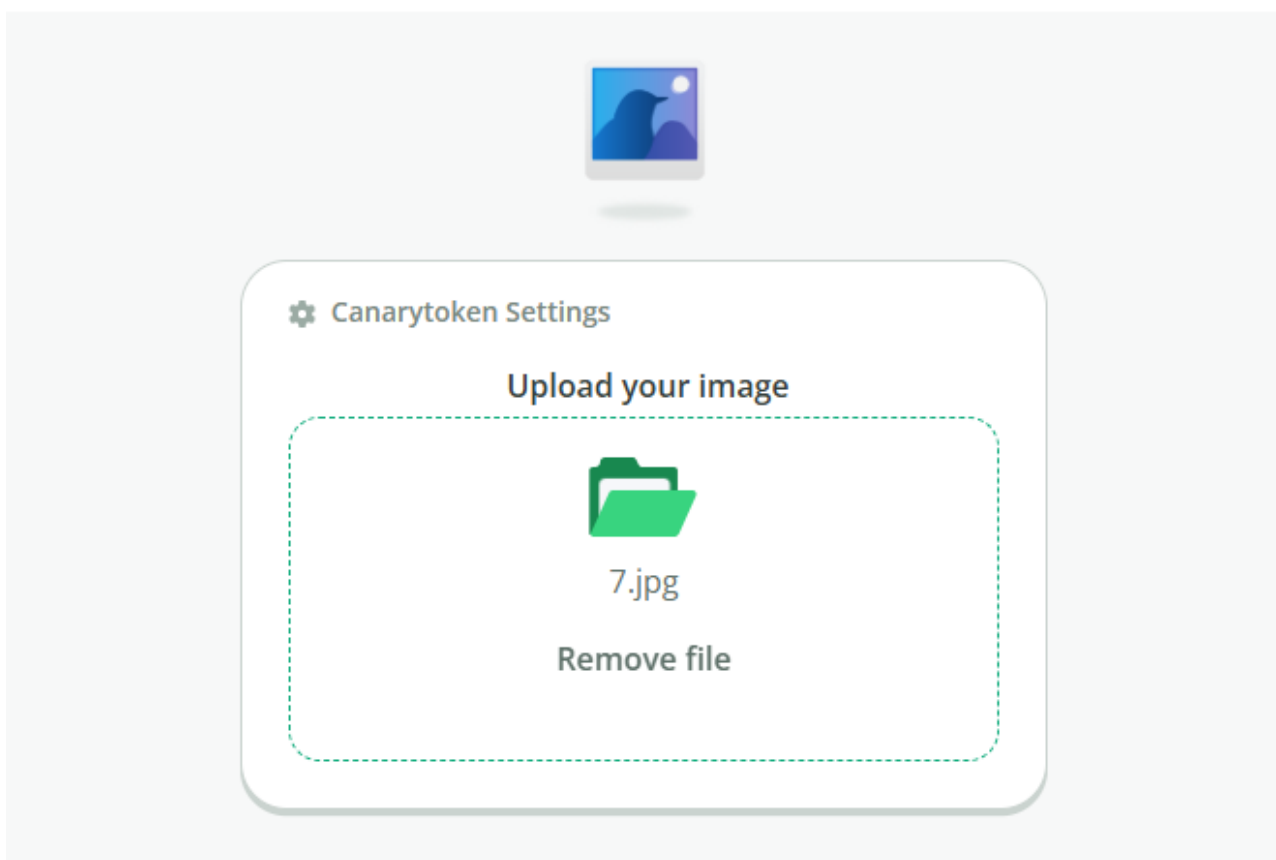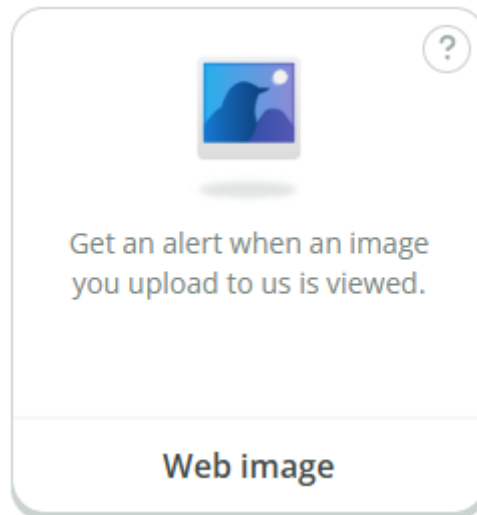

Mail me here when the alert fires

talha105th@gmail.com

Remind me of this when the alert fires

Alert Your Private image is viewed by
someone.

+ Add Webhook Notification

Create Canarytoken



Your Canarytoken was triggered

Custom image Canarytoken has been triggered by the Source IP
39.41.72.109



Reminder

Alert Your Private image is viewed by someone.



Source IP

39.41.72.109

Task # 02

● Rule Type

● Protocol and Ports

● Action

● Profile

● Name

What type of rule would you like to create?

☐ **Program**
Rule that controls connections for a program.

☒ **Port**
Rule that controls connections for a TCP or UDP port.

☐ **Predefined:**

@FirewallAPI.dll,-80200

Rule that controls connections for a Windows experience.

☐ **Custom**
Custom rule.

Steps:

● Rule Type

● Protocol and Ports

● Action

● Profile

● Name

Does this rule apply to TCP or UDP?

☐ **TCP**

☒ **UDP**

Does this rule apply to all remote ports or specific remote ports?

☐ **All remote ports**

☒ **Specific remote ports:**
Example: 80, 443, 5000-5010

☐ **Allow the connection**
This includes connections that are protected with IPsec as well as those are not.

☐ **Allow the connection if it is secure**
This includes only connections that have been authenticated by using IPsec. Connections will be secured using the settings in IPsec properties and rules in the Connection Security Rule node.

Customize...

☒ **Block the connection**

Rule Type

Protocol and Ports

Action

Profile


Name

Name:

Anti_Malware_DNS_Block.

Description (optional):

Result

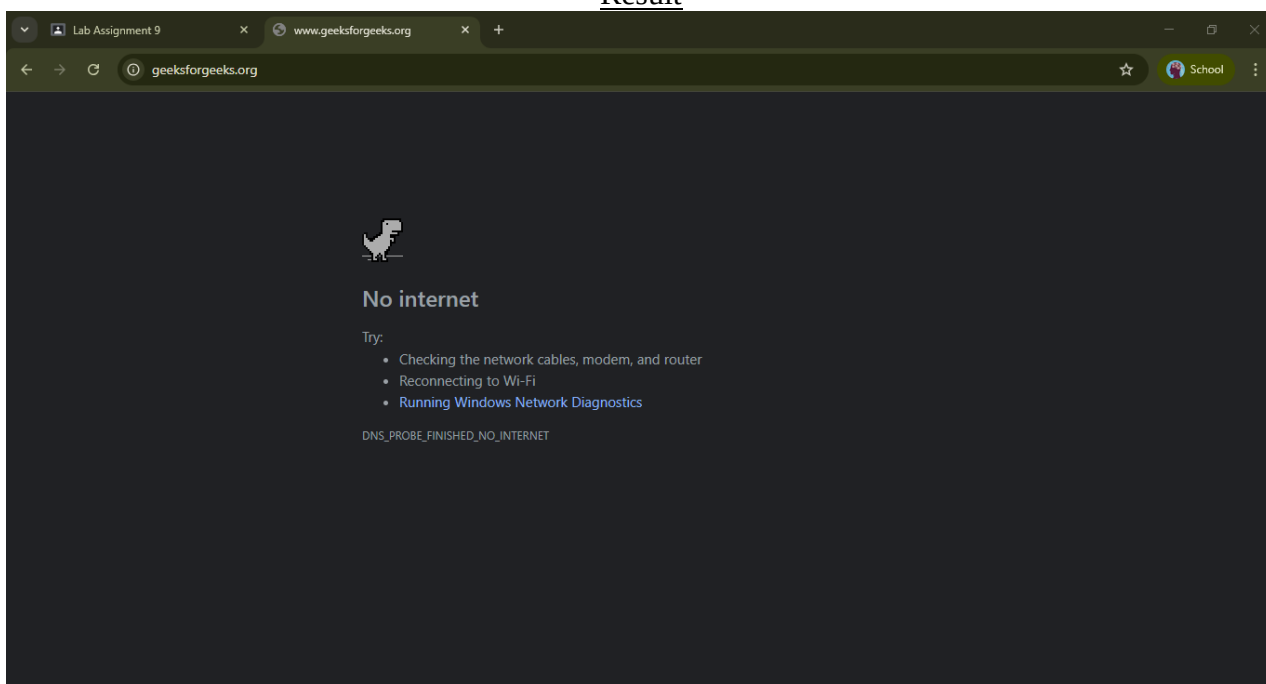

Task # 03

No.	Time	Source	Destination	Protocol	Length	Info
48783	43.268423	192.168.10.17	151.101.142.172	TCP	54	64424 → 80 [ACK] Seq=19621 Ack=3035482 Win=516 Len=0
48784	43.270262	151.101.142.172	192.168.10.17	TCP	1506	80 → 64430 [ACK] Seq=2974870 Ack=19801 Win=424 Len=1452
48785	43.270295	192.168.10.17	151.101.142.172	TCP	54	64430 → 80 [ACK] Seq=19801 Ack=2976322 Win=516 Len=0
48786	43.270608	151.101.142.172	192.168.10.17	TCP	1506	80 → 64430 [PSH, ACK] Seq=2976322 Ack=19801 Win=424 Len=1452
48787	43.274121	151.101.142.172	192.168.10.17	TCP	2958	80 → 64424 [PSH, ACK] Seq=3035482 Ack=19621 Win=424 Len=2904
48788	43.274160	192.168.10.17	151.101.142.172	TCP	54	64424 → 80 [ACK] Seq=19621 Ack=3038386 Win=516 Len=0
48789	43.274695	151.101.142.172	192.168.10.17	TCP	1506	80 → 64430 [ACK] Seq=2977774 Ack=19801 Win=424 Len=1452
48790	43.274713	192.168.10.17	151.101.142.172	TCP	54	64430 → 80 [ACK] Seq=19801 Ack=2979226 Win=516 Len=0
48791	43.275084	151.101.142.172	192.168.10.17	TCP	1506	80 → 64430 [PSH, ACK] Seq=2979226 Ack=19801 Win=424 Len=1452
48792	43.283095	151.101.142.172	192.168.10.17	TCP	2958	80 → 64424 [PSH, ACK] Seq=3038386 Ack=19621 Win=424 Len=2904
48793	43.283160	192.168.10.17	151.101.142.172	TCP	54	64424 → 80 [ACK] Seq=19621 Ack=3041290 Win=516 Len=0
48794	43.299200	151.101.142.172	192.168.10.17	TCP	1506	80 → 64424 [ACK] Seq=3041290 Ack=19621 Win=424 Len=1452
48795	43.299200	151.101.142.172	192.168.10.17	TCP	1506	80 → 64424 [PSH, ACK] Seq=3042742 Ack=19621 Win=424 Len=1452
48796	43.299325	192.168.10.17	151.101.142.172	TCP	54	64424 → 80 [ACK] Seq=19621 Ack=3044194 Win=516 Len=0
48797	43.299490	151.101.142.172	192.168.10.17	TCP	1506	80 → 64430 [ACK] Seq=2980678 Ack=19801 Win=424 Len=1452
48798	43.299510	192.168.10.17	151.101.142.172	TCP	54	64430 → 80 [ACK] Seq=19801 Ack=2982130 Win=516 Len=0
48799	43.299708	151.101.142.172	192.168.10.17	TCP	1506	80 → 64430 [PSH, ACK] Seq=2982130 Ack=19801 Win=424 Len=1452

> Frame 15716: Packet, 915 bytes on wire (7320 bits), 915 bytes captured (7320 bits) on interface

Ethernet II, Src: zte_71:76:d1 (a4:f3:3b:71:76:d1), Dst: Intel_06:42:4e (90:61:ae:06:42:4e)

Internet Protocol Version 4, Src: 151.101.142.172, Dst: 192.168.10.17

Transmission Control Protocol, Src Port: 80, Dst Port: 64438, Seq: 1058355, Ack: 7025, Len: 86

[36 Reassembled TCP Segments (66201 bytes): #15589(1452), #15590(4356), #15594(2904), #15599(2904)]

Hypertext Transfer Protocol

Data (65536 bytes)

0000 90 61 ae 06 42 4e a4 f3 3b 71 76 d1 08 00 45 08 a1 8N... jgv...E-

0010 03 85 26 37 40 00 3c 06 24 69 97 65 8e ac c0 a8 ..870<< \$!e....

0020 0a 11 00 50 fb b6 e0 ec 8c f4 5b 8d 96 1b 50 18 ...P....[...P-

0030 01 a8 8f d5 00 00 dc 3a 9a 99 bb 9e 1a 62 c4 d4:....b-M

0040 6c c2 13 50 f2 cb b3 5a 99 e4 9e 5c 64 17 4e a5 1...P...Z...d-N-

0050 e8 8f 21 69 0e db 7f 8b 8a a2 8a e2 92 a2 b2 8b ...i.....

0060 b0 8b 0d 57 82 5d 28 73 73 d4 53 cb 8c e1 8b e1 ...W.](s s-S.....

0070 14 a3 04 74 d6 5a 5e 39 16 c2 e2 a8 a2 a2 06 e1 ...t-Z?9.....

0080 ab fd d2 67 c9 21 eb 77 97 85 17 11 5b b1 49 55 ...g-l-w....[IU

0090 94 19 57 44 05 9c c6 94 46 df 7f c1 26 b4 9f 7f ..VD....F&....

Wireshark - Packet 24515 - Wi-Fi

> Frame 24515: Packet, 1506 bytes on wire (12048 bits), 1506 bytes captured (12048 bits) on interface \Device\NPF_{678EDE97-4355-445A-99D0-91AF072A6C05}

▼ Ethernet II, Src: zte_71:76:d1 (a4:f3:3b:71:76:d1), Dst: Intel_06:42:4e (90:61:ae:06:42:4e)

▼ Destination: Intel_06:42:4e (90:61:ae:06:42:4e)

.....0..... = LG bit: Globally unique address (factory default)

.....0..... = IG bit: Individual address (unicast)

> Source: zte_71:76:d1 (a4:f3:3b:71:76:d1)

Type: IPv4 (0x0800)

[Stream index: 0]

> Internet Protocol Version 4, Src: 151.101.142.172, Dst: 192.168.10.17

> Transmission Control Protocol, Src Port: 80, Dst Port: 64438, Seq: 1230790, Ack: 8326, Len: 1452

0000 90 61 ae 06 42 4e a4 f3 3b 71 76 d1 08 00 45 08 .a..BN..jqv...E..

0010 05 d4 45 9b 40 00 3c 06 02 b6 97 65 8e ac c0 a8 ..E.@<...e....

0020 0a 11 00 50 fb b6 e1 94 ab ee 5b 8e 97 25 50 18 ...P...[...%P...

0030 01 a8 85 c8 00 00 d1 25 d8 6c a0 10 23 5e 65 85%..1-#^e...

0040 5c a8 6c a0 16 01 62 50 10 64 cf a1 8f 0a cc bd \..-bP..d.....

0050 30 f8 80 38 8d 11 35 dc 2a 47 b7 22 89 80 1c 6e 0..8..5..*G..-..n

0060 1e ca a8 e2 07 b9 d2 e2 a8 0e d8 18 c1 22 a0 dd ..%P,..Se.....

0070 00 c4 25 50 80 2c 14 c4 cc 53 65 e2 90 c4 82 17 ..P,..Se.....

0080 7b 9e 6c 3c 29 2b ec a1 0c 2f 9f 12 ec 38 41 49 {...<)+.../...8AI

0090 17 3f 29 fd 47 55 d7 f9 49 be 91 56 b7 f7 51 d5 ->).GU..I..V..Q...

00a0 37 ca 1f 14 85 f7 87 55 d7 45 99 6f b2 b0 01 40 7.....U..E.o...@

00b0 05 47 fe 3c fe be 35 15 c7 e3 aa ab 70 1e d0 48 .G.<..5.....p...H

00c0 89 22 b2 52 83 ab 3e 08 75 39 11 b2 3c 86 fc 8d ..R..>..u9<....

00d0 11 c3 5b 35 53 b7 7d 1a 05 2b cd 8e e1 26 fc ec ..[5S]-..+...&...

00e0 58 e8 17 6f 07 fe 6e 04 1a 4b 09 c1 31 c5 57 79 X..o..n..K..1..My

00f0 58 f3 72 28 96 e7 74 27 0c 7e 68 75 b2 03 c9 1e X.r(..t)..~hu....

Specifies (if this is an individual (unicast) or group (broadcast/multicast) address (eth.dst.ig), 1 bit

☒ Show packet bytes Layout: Vertical (Stacked)

Close Help

tcp.flags.syn==1

No.	Time	Source	Destination	Protocol	Length	Info
6925	6.140939	192.168.10.17	157.255.4.39	TCP	66	64461 → 443 [SYN] Seq=0 Win=65535 Len=0 MSS=1460 WS=2 SACK_PERM
6926	6.186196	192.168.10.17	101.33.47.68	TCP	66	64462 → 8081 [SYN] Seq=0 Win=65535 Len=0 MSS=1460 WS=2 SACK_PERM
6927	6.186486	192.168.10.17	101.33.47.68	TCP	66	64463 → 8081 [SYN] Seq=0 Win=65535 Len=0 MSS=1460 WS=2 SACK_PERM
6936	6.310211	101.33.47.68	192.168.10.17	TCP	66	8081 → 64462 [SYN, ACK] Seq=0 Ack=1 Win=42340 Len=0 MSS=1424 SACK_PERM WS=512
6945	6.311396	101.33.47.68	192.168.10.17	TCP	58	8081 → 64463 [SYN, ACK] Seq=0 Ack=1 Win=42340 Len=0 MSS=1424
7397	6.570347	157.255.4.39	192.168.10.17	TCP	66	443 → 64461 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1424 SACK_PERM WS=512
19213	13.493654	192.168.10.17	216.239.34.157	TCP	66	64464 → 443 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 WS=256 SACK_PERM
19362	13.566176	216.239.34.157	192.168.10.17	TCP	66	443 → 64464 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1412 SACK_PERM WS=256

> Frame 19362: Packet, 66 bytes on wire (528 bits), 66 bytes captured (528 bits) on interface \Device\NPF_{678EDE97-4355-445A-99D0-91AF072A6C05}

▼ Ethernet II, Src: zte_71:76:d1 (a4:f3:3b:71:76:d1), Dst: Intel_06:42:4e (90:61:ae:06:42:4e)

▼ Destination: Intel_06:42:4e (90:61:ae:06:42:4e)

.....0..... = LG bit: Globally unique address (factory default)

.....0..... = IG bit: Individual address (unicast)

▼ Source: zte_71:76:d1 (a4:f3:3b:71:76:d1)

.....0..... = LG bit: Globally unique address (factory default)

.....0..... = IG bit: Individual address (unicast)

Type: IPv4 (0x0800)

[Stream index: 0]

> Internet Protocol Version 4, Src: 216.239.34.157, Dst: 192.168.10.17

> Transmission Control Protocol, Src Port: 443, Dst Port: 64464, Seq: 0, Ack: 1, Len: 0

0000 90 61 ae 06 42 4e a4 f3 3b 71 76 d1 08 00 45 08 .a..BN..jqv...E..

0010 00 34 00 00 00 00 7c 06 37 fe d8 ef 22 9d c0 a8 .4..@|..7...-...

0020 0a 11 01 bb fb d0 f3 df 76 48 ea 49 50 f8 80 12vH..IP....

0030 ff ff 05 f4 00 00 02 04 05 84 01 01 04 02 01 03

0040 03 00