
# Chapter 1 - Introduction and Overview

ch1

# **Computer System Organization**

- Computer-system operation
  - One or more CPUs, device controllers connect through common bus providing access to shared memory
  - Concurrent execution of CPUs and devices competing for memory cycles

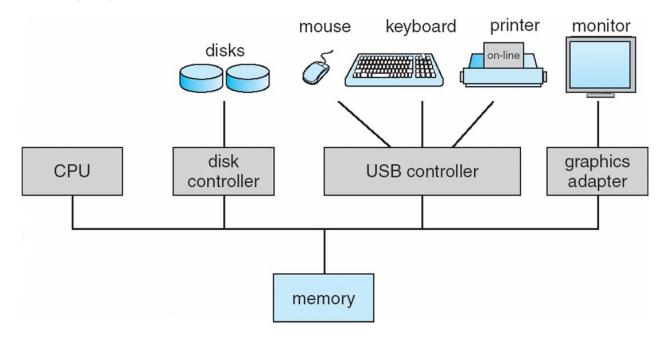

## **Computer System Structure**

- Computer system can be divided into four components:
  - Hardware provides basic computing resources
    - ▶ CPU, memory, I/O devices
  - Operating system
    - Controls and coordinates use of hardware among various applications and users
  - Application programs define the ways in which the system resources are used to solve the computing problems of the users
    - Word processors, compilers, web browsers, database systems, video games
  - Users
    - People, machines, other computers


## What is an Operating System?

- A program that acts as an intermediary between a user of a computer and the computer hardware
- Operating system goals:
  - Execute user programs and make solving user problems easier
  - Make the computer system convenient to use
  - Use the computer hardware in an efficient manner

#### **Computer-System Architecture**


- Most systems use a single general-purpose processor
  - Most systems have special-purpose processors as well
- Multiprocessors systems growing in use and importance
  - Also known as parallel systems, tightly-coupled systems
  - Advantages include:
    - 1. Increased throughput
    - 2. Economy of scale
    - 3. Increased reliability graceful degradation or fault tolerance
  - Two types:
    - Asymmetric Multiprocessing each processor is assigned a specie task.
    - 2. Symmetric Multiprocessing each processor performs all tasks

#### **Symmetric Multiprocessing Architecture**

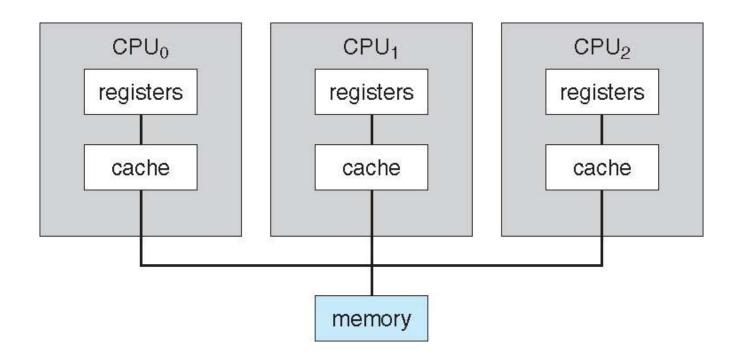

## A Dual-Core Design

- Multi-chip and multicore ■
- Systems containing all chips
- Chassis containing multiple separate systems •

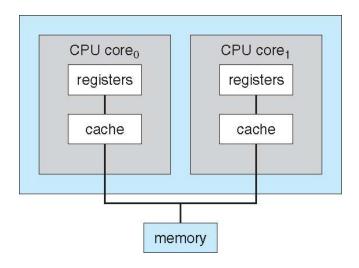

#### **Operating-System Operations**


- Interrupt driven (hardware and software)
  - Hardware interrupt by one of the devices
  - Software interrupt (exception or trap):
    - Software error (e.g., division by zero)
    - Request for operating system service
    - Other process problems include infinite loop, processes modifying each other or the operating system

# **Operating-System Operations (cont.)**

- Dual-mode operation allows OS to protect itself and other system components
  - User mode and kernel mode
  - Mode bit provided by hardware
    - Provides ability to distinguish when system is running user code or kernel code
    - Some instructions designated as privileged, only executable in kernel mode
    - System call changes mode to kernel, return from call resets it to user
- Increasingly CPUs support multi-mode operations
  - i.e. virtual machine manager (VMM) mode for guest VMs

#### **Transition from User to Kernel Mode**

- Timer to prevent infinite loop / process hogging resources
  - Timer is set to interrupt the computer after some time period
  - Keep a counter that is decremented by the physical clock.
  - Operating system set the counter (privileged instruction)
  - When counter zero generate an interrupt
  - Set up before scheduling process to regain control or terminate program that exceeds allotted time

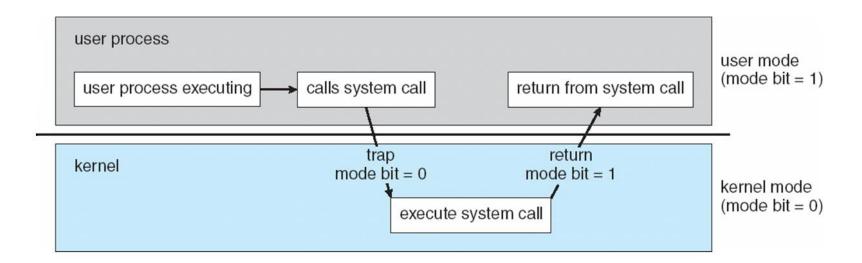

#### **Computing Environments - Virtualization**

- Allows operating systems to run applications within other OSes
  - Vast and growing industry
- Emulation used when source CPU type different from target type (i.e. PowerPC to Intel x86)
  - Generally slowest method
  - When computer language not compiled to native code Interpretation
- Virtualization OS natively compiled for CPU, running guest
  OSes also natively compiled
  - Consider VMware running WinXP guests, each running applications, all on native WinXP host OS
  - VMM (virtual machine Manager) provides virtualization services
- VMM can run natively, in which case they are also the host
  - There is no general purpose host then (VMware ESX and Citrix XenServer)

#### **Computing Environments - Virtualization**

