
TP86 Printed: Friday, April 14, 2023 10:58:33 C:\Users\user\Documents\OmniSEC Data\THF\2023-04-13\2023-04-13_19;11;42_TP86_01.vdt



Conventional	Calibration -	- Homopoly	vmers : Results
Conventional	Cambration .		vincis . ixcsuits

Peak RV - (ml)	16.093
Mn - (Daltons)	10,712
Mw - (Daltons)	17,690
Mz - (Daltons)	26,033
Mp - (Daltons)	16,597
Mw / Mn	1.651
Percent Above Mw: 0	100.000
Percent Below Mw: 0	0.000
Mw 10.0% Low	3,884
Mw 10.0% High	44,538
Wt Fr (Peak)	1.000
RI Area - (mvml)	191.61
UV Area - (mvml)	0.00

Annotation	
Method File	PS CONV-0003.vcm
Limits File	
Date Acquired	Apr 13, 2023 - 19:11:42
Solvent	THF
Acquisition Operator	admin : Administrator
Calculation Operator	admin : Administrator
Column Set	2 x PLGel Mixed-B
System	THF
Flow Rate - (ml/min)	1.000
Inj Volume - (ul)	100.0
Volume Increment - (ml)	0.00333
Detector Temp (deg C)	40.0
Column Temp (deg C)	40.0
OmniSEC Build Number	406

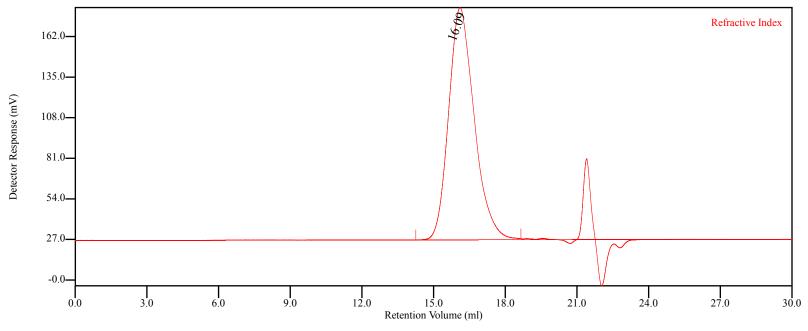