




**ABSOLUTE RATINGS** (limiting values)




Symbol	Parameter and test conditions	Value	Unit
$V_{PP}$	Internal pins (A3, B3, C3):		kV
	ESD discharge IEC61000-4-2, air discharge	2	
	ESD discharge IEC61000-4-2, contact discharge	2	
	External pins (A2, B1, C2, C1):		
	ESD discharge IEC61000-4-2, air discharge	15	
	ESD discharge IEC61000-4-2, contact discharge	8	
$T_j$	Maximum junction temperature	125	$^{\circ}\text{C}$
$T_{op}$	Operating temperature range	-40 to + 85	$^{\circ}\text{C}$
$T_{stg}$	Storage temperature range	-55 to +150	$^{\circ}\text{C}$

**ELECTRICAL CHARACTERISTICS** ( $T_{amb} = 25^{\circ}\text{C}$ )

Symbol	Parameter
$V_{BR}$	Breakdown voltage
$I_{RM}$	Leakage current @ $V_{RM}$
$V_{RM}$	Stand-off voltage
$V_{CL}$	Clamping voltage
$R_d$	Dynamic impedance
$I_{PP}$	Peak pulse current
$R_{I/O}$	Series resistance between Input & Output
$C_{line}$	Input capacitance per line

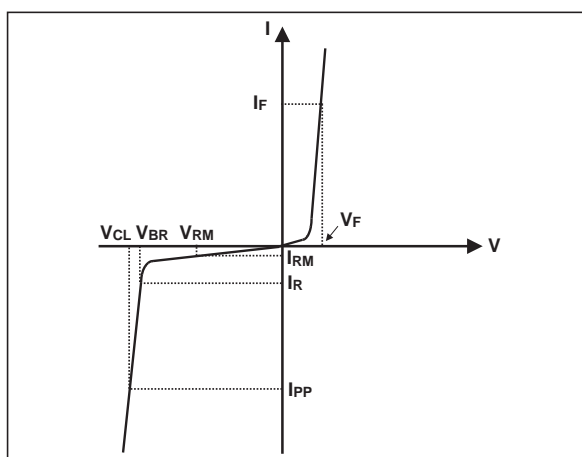


Symbol	Test conditions	Min.	Typ.	Max.	Unit
$V_{BR}$	$I_R = 1 \text{ mA}$	6		20	V
$I_{RM}$	$V_{RM} = 3 \text{ V}$			0.1	$\mu\text{A}$
$R_d$			1.5		$\Omega$
$R_1, R_3$	Tolerance $\pm 20\%$		100		$\Omega$
$R_2$	Tolerance $\pm 20\%$		47		$\Omega$
$C_{line}$	@ 0V			20	pF

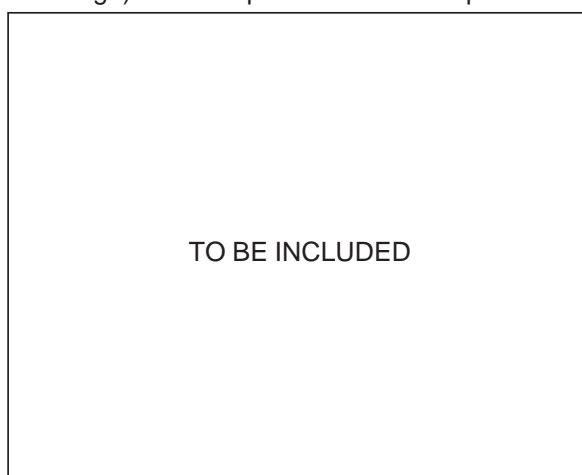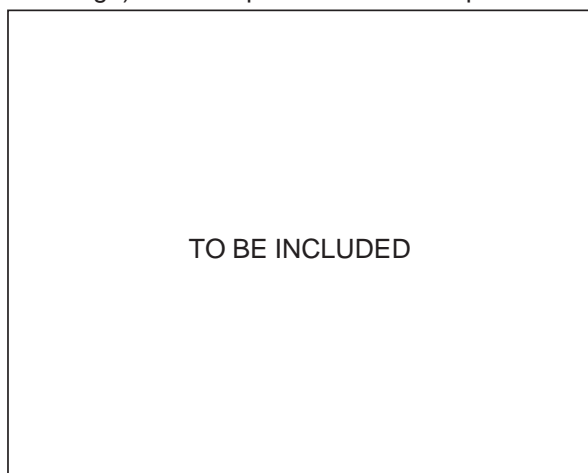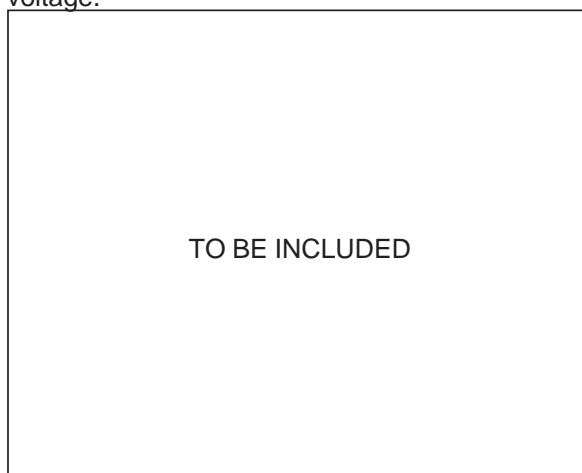**Fig. 1:** S21 (dB) attenuation measurements.**Fig. 2:** Analog crosstalk measurements.**Fig. 3:** Digital crosstalk measurements.**Fig. 4:** ESD response to IEC61000-4-2 (+15kV air discharge) on one input and on one output.**Fig. 5:** ESD response to IEC61000-4-2 (-15kV air discharge) on one input and on one output.**Fig. 6:** Line capacitance versus reverse applied voltage.

Aplac model




ORDER CODE

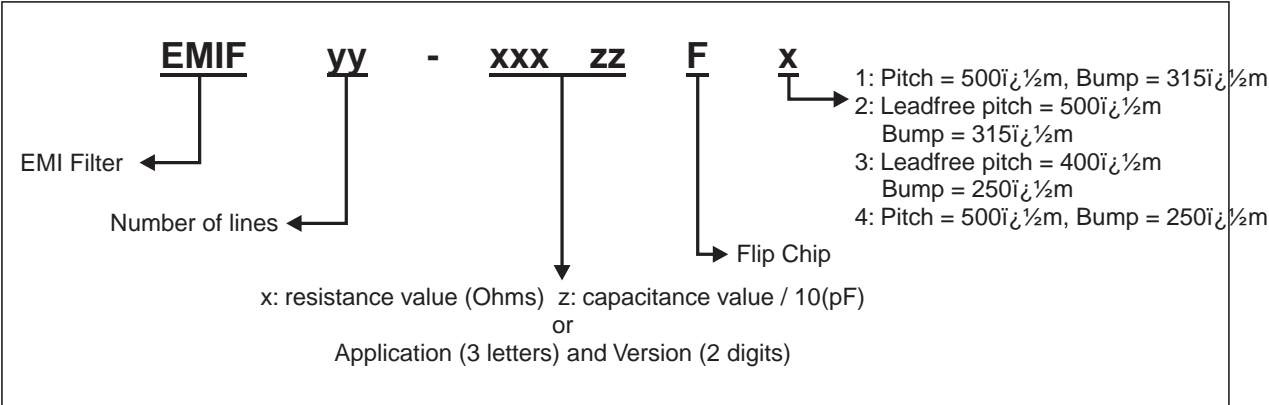


PACKAGE MECHANICAL DATA


(all dimensions in µm)

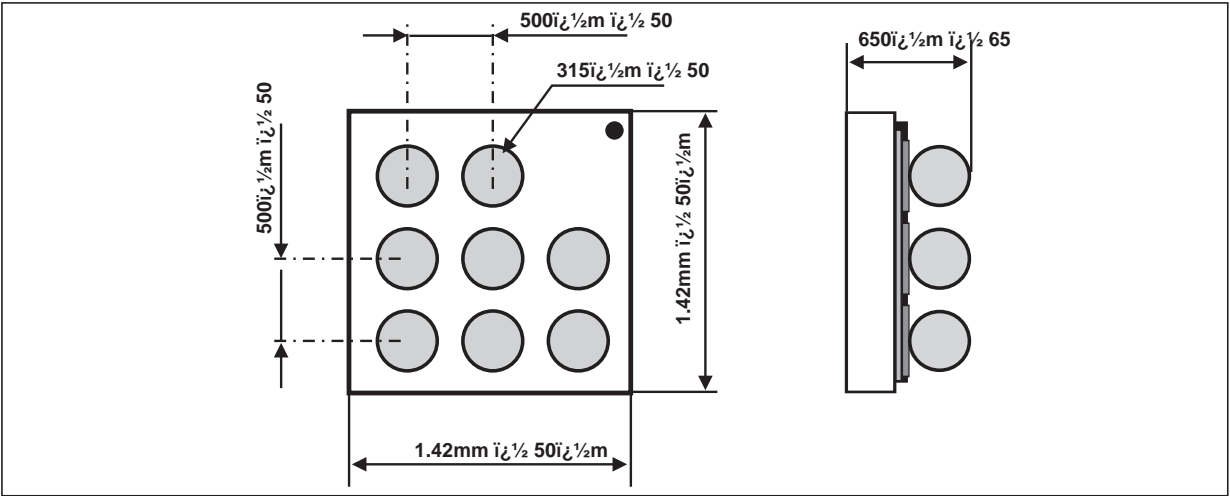


## FOOT PRINT RECOMMENDATIONS

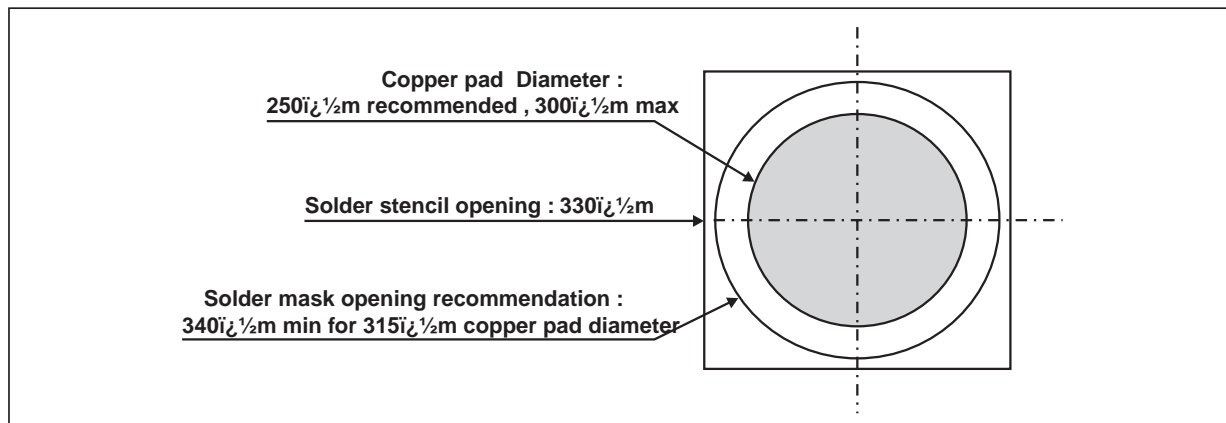

## MARKING

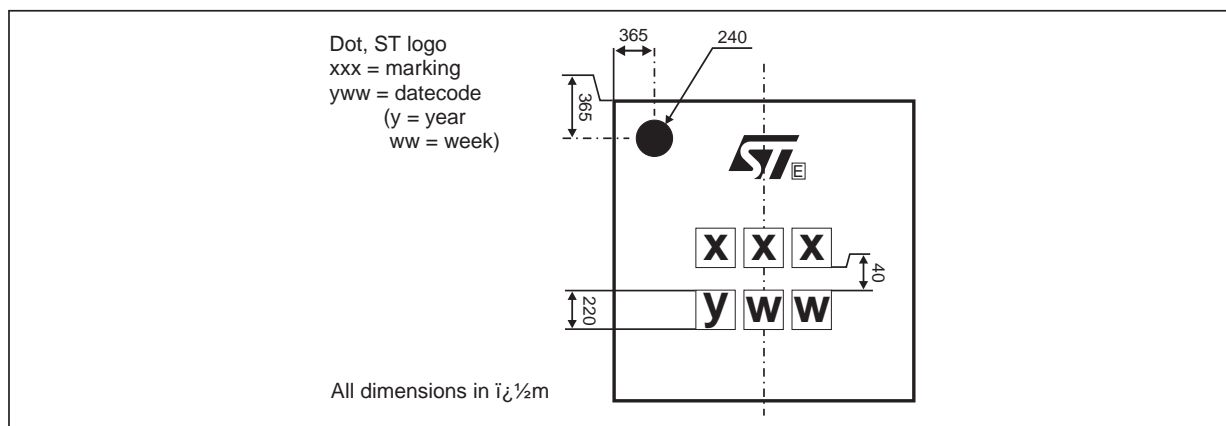

PACKING

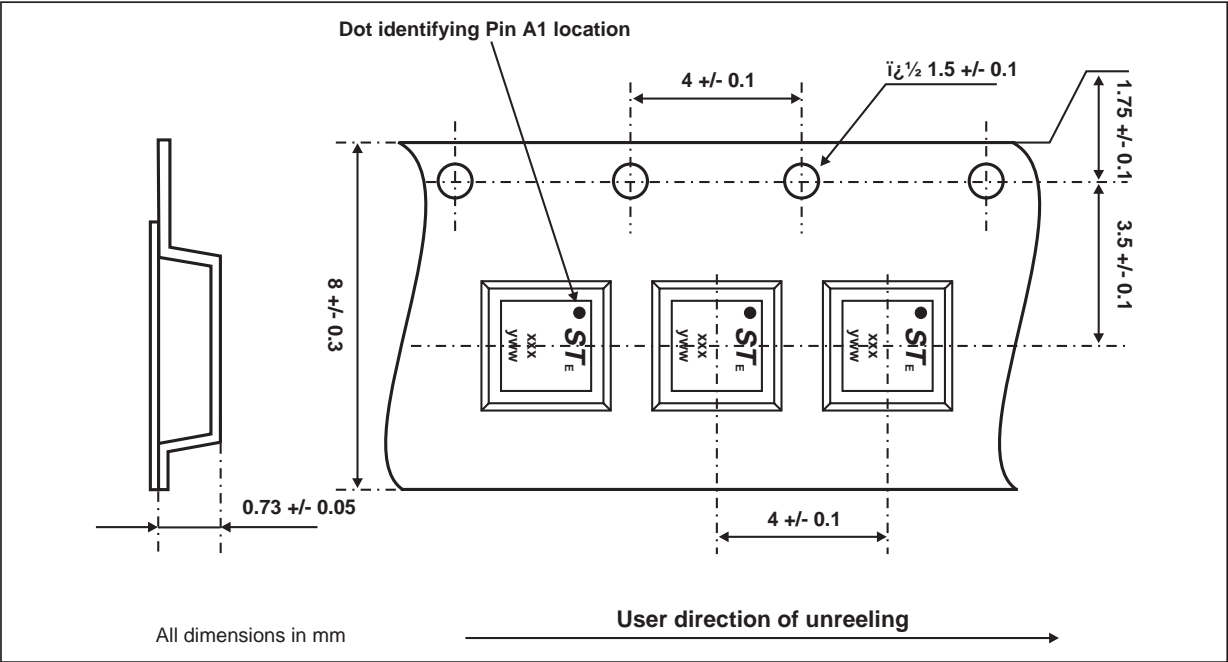

PACKING

Ordering code	Marking	Package	Weight	Base qty	Delivery mode
EMIF03-SIM02F2	TBD	Flip Chip	3.3 mg	5000	Tape & reel 71 1/2

**Note:** More packing information are available in the application notes:

- AN1235: 1/2 Flip-Chip: Package description and recommendations for use
- AN1751: 1/2 EMI Filters: Recommendations and measurements

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.

All other names are the property of their respective owners.

© 2003 STMicroelectronics - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany -  
Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain -  
Sweden - Switzerland - United Kingdom - United States

[www.st.com](http://www.st.com)

