

1. Description


1.1. Project

Project Name	UART_IT_DEMO
Board Name	UART_IT_DEMO
Generated with:	STM32CubeMX 4.23.0
Date	08/24/2018

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F401
MCU name	STM32F401RETx
MCU Package	LQFP64
MCU Pin number	64


2. Pinout Configuration

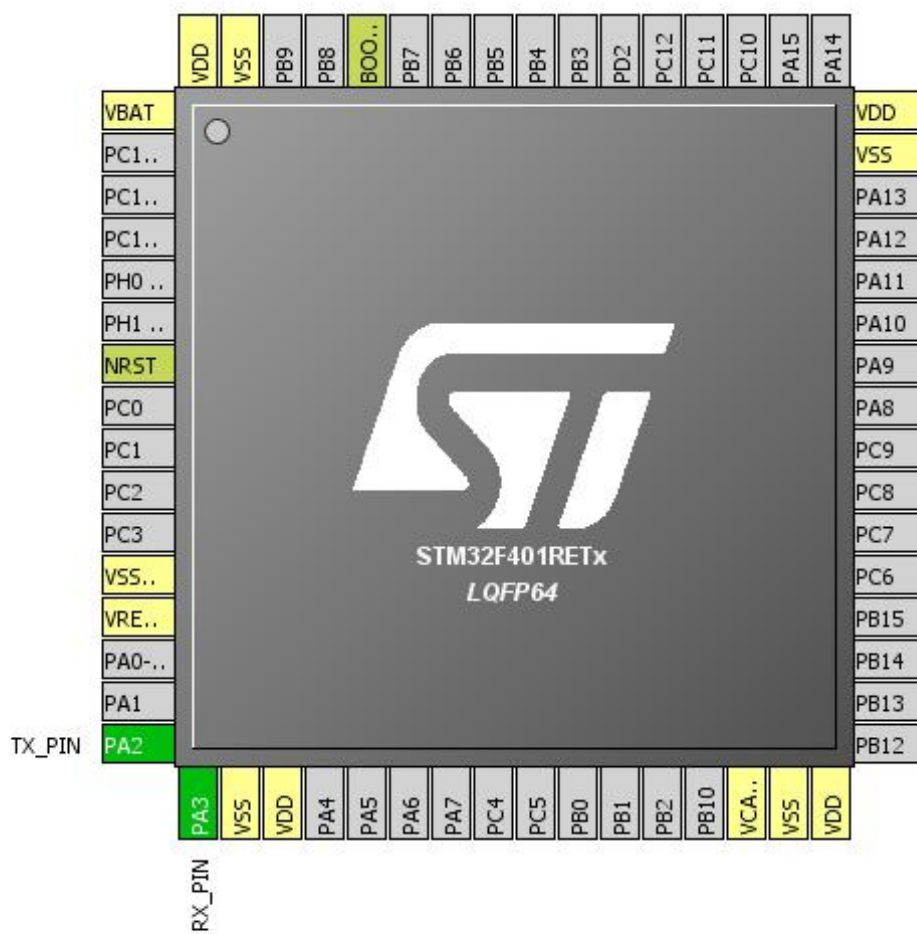

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
7	NRST	Reset		
12	VSSA/VREF-	Power		
13	VREF+	Power		
16	PA2	I/O	USART2_TX	TX_PIN
17	PA3	I/O	USART2_RX	RX_PIN
18	VSS	Power		
19	VDD	Power		
30	VCAP1	Power		
31	VSS	Power		
32	VDD	Power		
47	VSS	Power		
48	VDD	Power		
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

4. Clock Tree Configuration

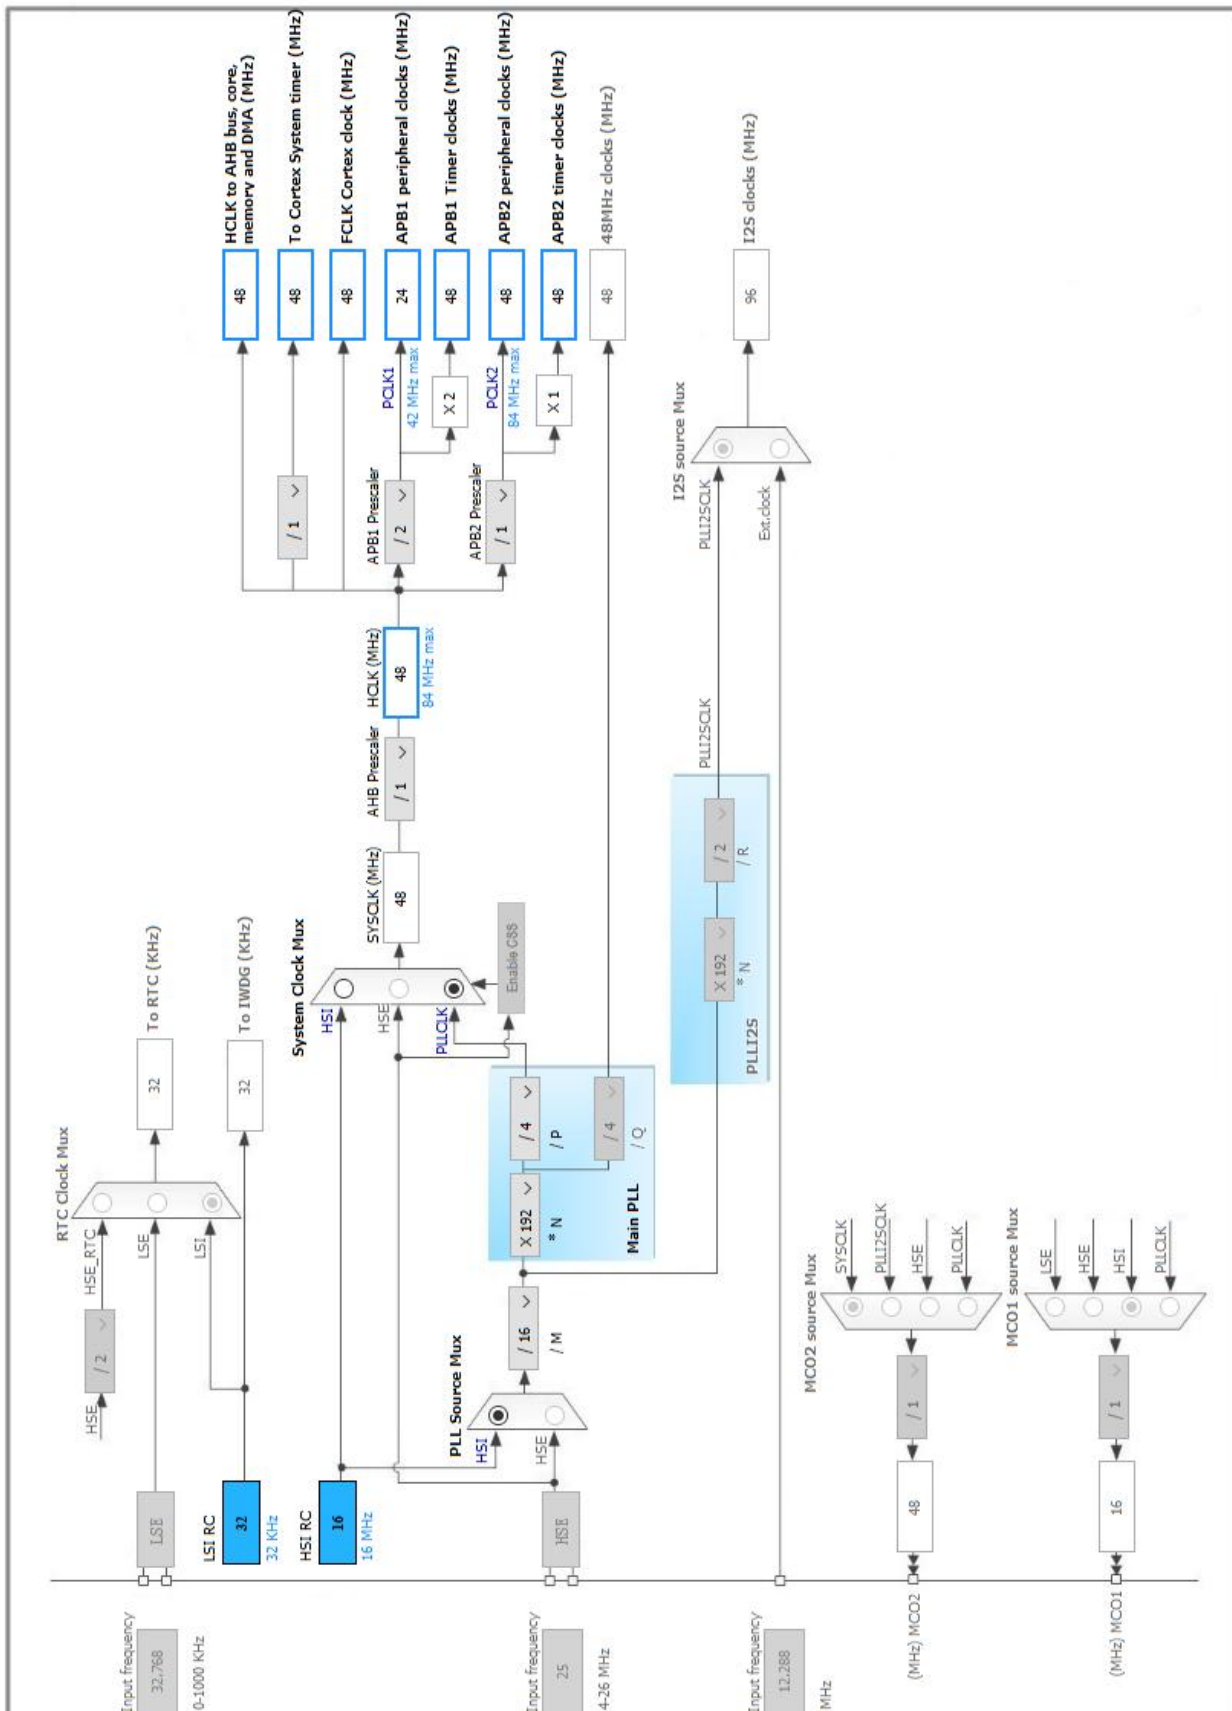

5. IPs and Middleware Configuration

5.1. SYS

Timebase Source: SysTick

5.2. USART2

Mode: Asynchronous

5.2.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	Very High *	TX_PIN
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	Very High *	RX_PIN

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USART2 global interrupt	true	1	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F401
MCU	STM32F401RETx
Datasheet	025644_Rev3

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	UART_IT_DEMO
Project Folder	F:\Information package and tutorial for
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F4 V1.18.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No