
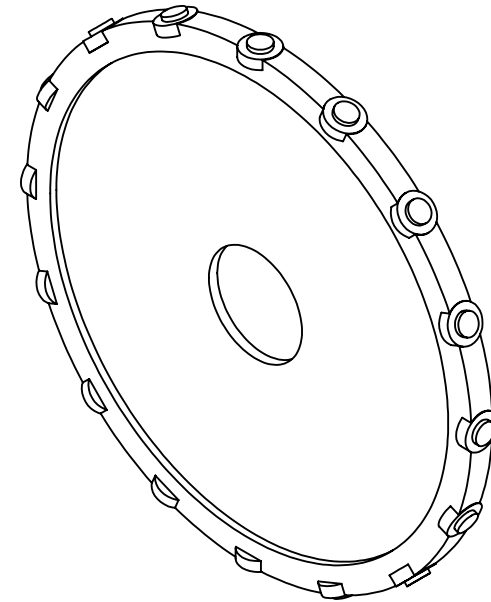


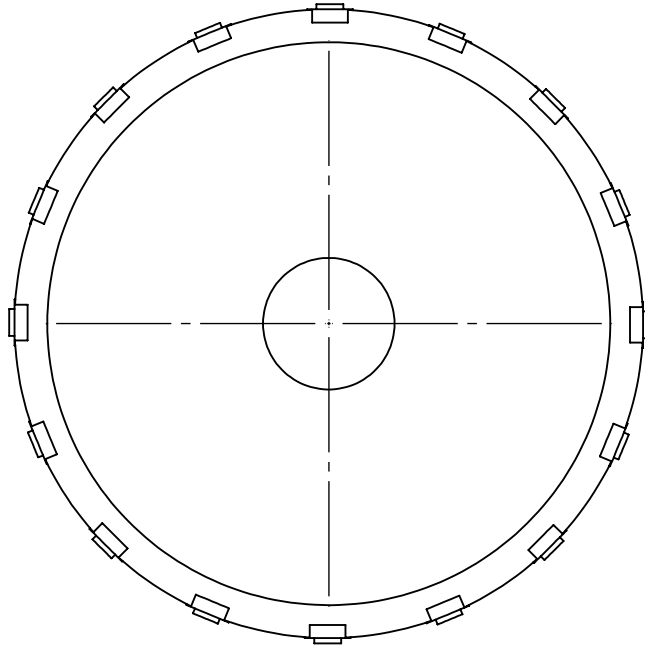

D04 - CENTRAL CARRIER (16-STATION)

Source: openfan_central_carrier_v02_16station.SLDPRT

Central bore radius 0.100 m [PROVISIONAL, HUB_MATERIAL_AND_WEB_SIZING_STUDY.md]

Web (field): r 0.100 -> 0.428 m, 18 mm thick. Rim: r 0.428 -> 0.478 m, 45 mm thick

16x interface pad OD 70 mm, 20 mm thick, at 22.5 deg pitch (exact)

16x alignment spigot D 41 mm, 8 mm protrusion (register fit, NON-TOLERANCED)

Evidence: CENTRAL_CARRIER_BUILD_REPORT.md, central_carrier_v02_16station_verification.json

STATUS: Geometrically verified, 16/16 stations physically built (V01-V03 PASS).

Material provisional (Ti-6Al-4V). Global stress estimate only (~30 MPa), NOT FEA-validated.