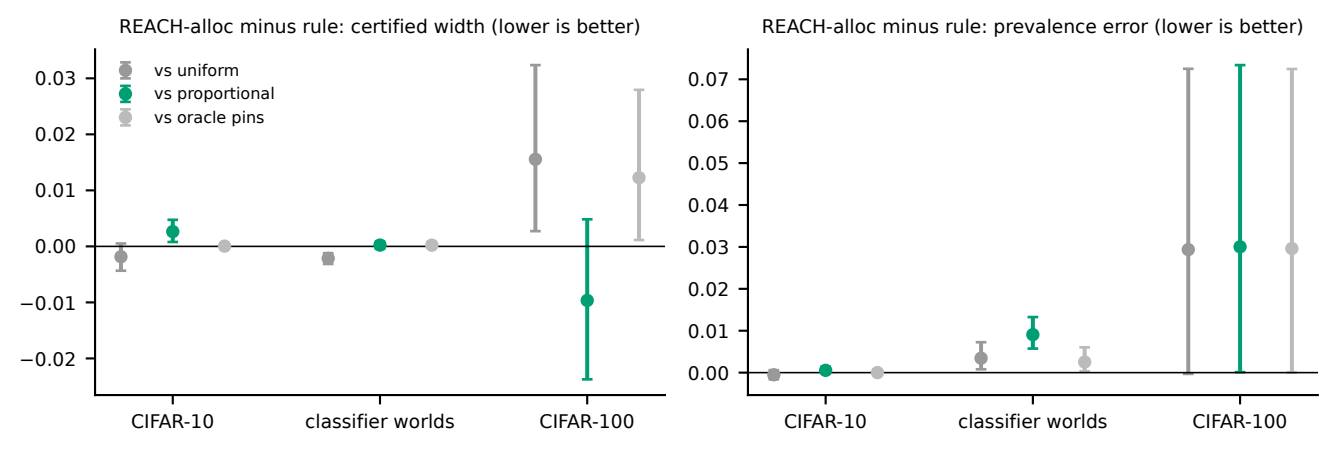
REACH-alloc minus rule: certified width (lower is better)
vs uniform
vs proportional
vs oracle pins
0.03
0.02
0.01
0.00
−0.01
−0.02
CIFAR-10
classifier worlds
CIFAR-100
REACH-alloc minus rule: prevalence error (lower is better)
0.07
0.06
0.05
0.04
0.03
0.02
0.01
0.00
CIFAR-10
classifier worlds
CIFAR-100