





AUTO CONDUCTIVITY TEMP. METER

MODEL NO. ALE-877

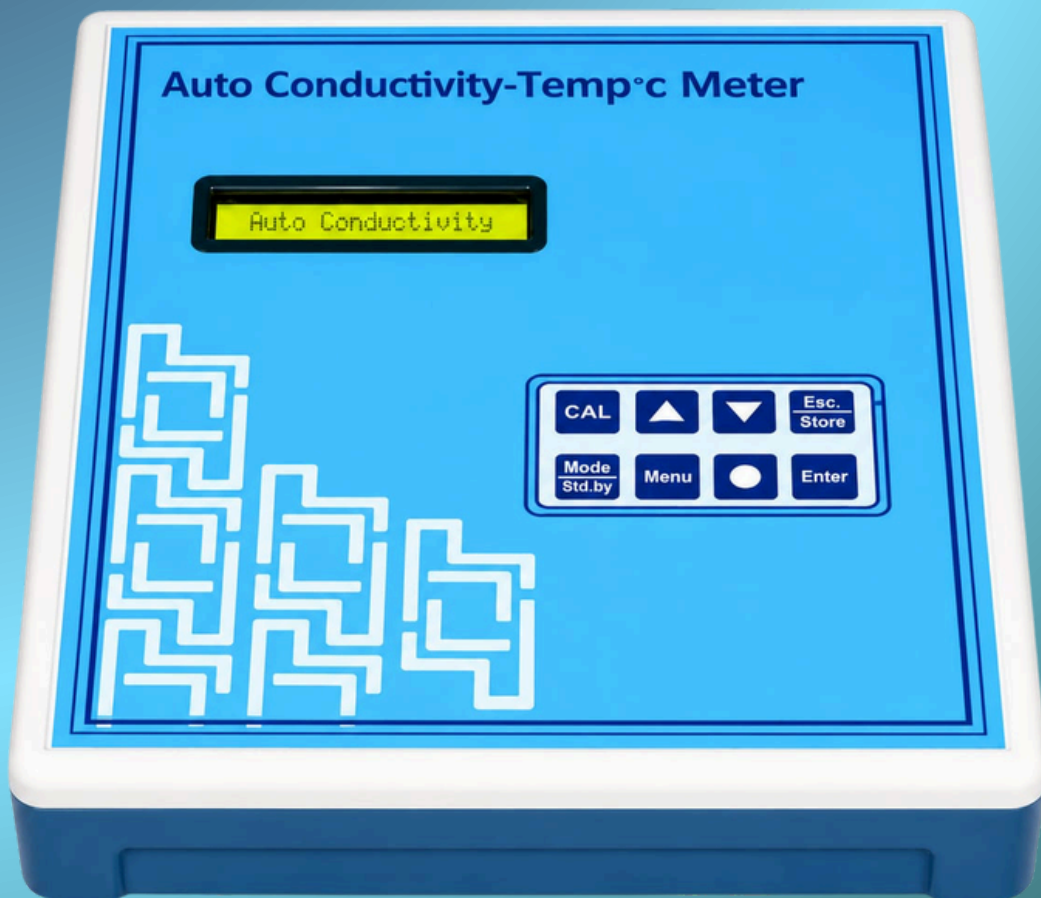

The Auto Conductivity Meter offered by the company are high on quality, performance and are made of the finest quality raw materials, making them durable and long lasting. Auto Conductivity-Temp. Meter is a solid state instrument designed to provide the precise Conductivity / Temp. Measurements. We have uses the latest microprocessor technology and advanced engineering techniques so as to give enhanced accuracy and reproducibility. The system has user friendly prompts, which guide you throughout the measurement process.



Features

- Highly Stable & Accurate
- Easy to operate & user friendly
- Using Latest Microcontroller
- Auto Temperature Compensation Facility
- Auto Ranging Facility
- Cell Constant Measurement & Adjustment facility
- Alphanumeric LCD 16x2

Accessories

- Conductivity Cell
- Temperature Probe.
- Operation Manual
- Dust Cover
- Conductivity Cell Stand
- 12V DC Adaptor

SPECIFICATION

★ Five Stages of Quality Checking Before Dispatch.

Parameter	Specification
Model	ALE-877
Display	Alphanumeric LCD 16x2
Measurement	Conductivity & Temperature
Range	Five Ranges:- 0-200 μ S/cm, 0-2 mS/cm, 0-20 mS/cm, 0-200 mS/cm
Range Selection	Automatic in 5 Auto Range
Resolution	0.1 μ S/cm, 0.1°C
Accuracy	$\pm 0.5\%$ FS ± 1 Digit
Temperature Compensation	Automatic : 0 to 50°C
Cell Constant	Adjustable
Conductivity Cell	Platinum DIP Type
Power	12V DC Adapter, 230V $\pm 10\%$ AC, 50 Hz
Dimensions	195x225x63 (L x B x H)
Weight	2kg

Note: Technical Specifications, Appearance & Model number are subject to change without prior notice.