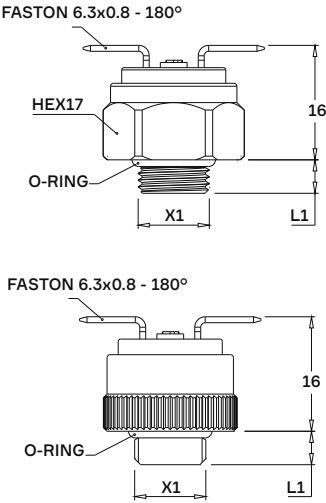


Overpressure limit	Brass - Diaphragm	20 bar	Operating temperature	See the guide to selection of diaphragms / seals		Standard protection level	.95 Faston Connection 180° - IP00 * See the attachment caps and connectors	
Working pressure	Brass - Diaphragm	10 bar	Max Hysteresis	Diaphragm version	15% of full scale value			

Select specifications for product coding

1.	Setting Range	01 Diaphragm 0.5-2.5 Bar	02 Diaphragm 2.5-4.5 Bar	03 Diaphragm 4.5-7.0 Bar
2.	Electrical Load			5 48 V / 0,2 A
3.	Electrical Condition			A Normally Open
4.	Housing Material		B Knurled Brass	E Brass SW17
5.	Seals			N NBR
6.	Threads (X1)		10 1/8"BSPP L1 10 mm	40 1/8"- 27NPT L1 10 mm
7.	Customizations	.95 Faston Connection 180° - IP00	.F0 Faston Connection - IP00	.96 Dual Cable L. 250mm - IP67

1.	2.	3.	4.	5.	6.	7.
----	----	----	----	----	----	----