


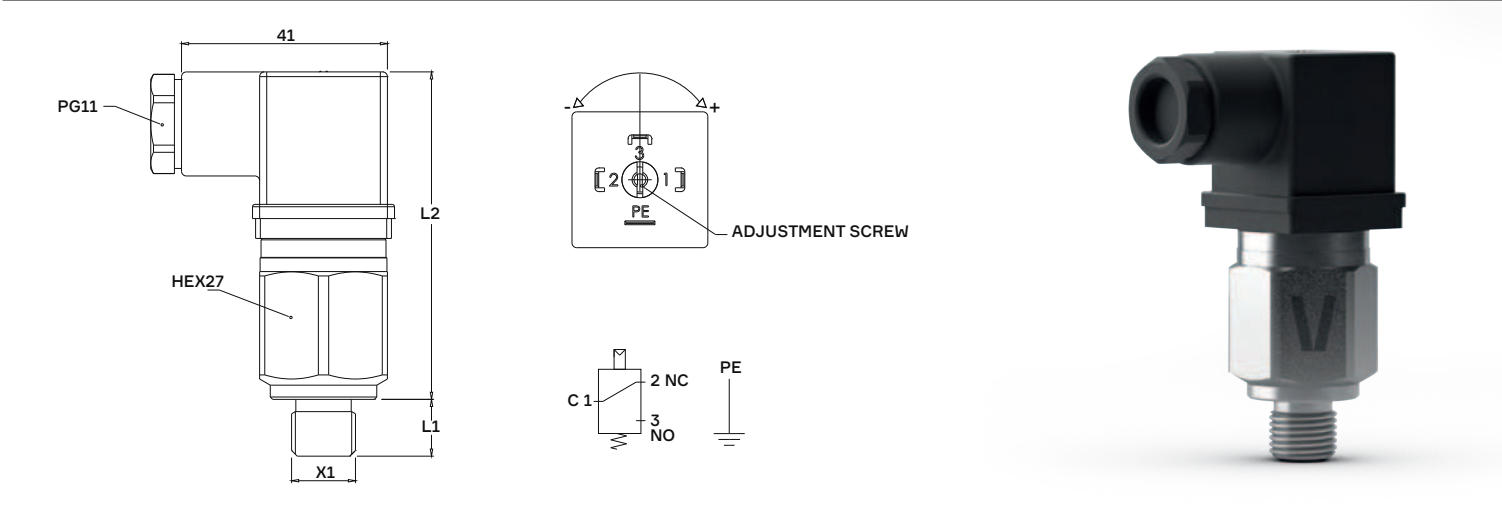

Overpressure limit	Brass - Diaphragm	80 bar	Operating temperature	* See the guide to selection of diaphragms / seals	Standard protection level	.E0 DIN Connector EN 175301-803-A (DIN43650/A) - IP65 * See the attachment caps and connectors
	Steel - Diaphragm	300 bar				
Working pressure	Steel - Piston	600 bar	Max Hysteresis	Piston version	L2 Dimension	Piston version 68 mm Diaphragm version 65 mm
	Brass - Diaphragm	40 bar		Diaphragm version		
	Steel - Diaphragm	180 bar		15% of full scale value		
	Steel - Piston	450 bar		10% of full scale value		

Select specifications for product coding

1.

Setting Range

01
Diaphragm
0.3-1 Bar

02
Diaphragm
0.5-2 Bar

03
Diaphragm
1.5-10 Bar

04
Diaphragm
9-20 Bar

05
Diaphragm
15-50 Bar

06
Diaphragm
40-80 Bar

07
Diaphragm
50-100 Bar

08
Piston
50-150 Bar

09
Piston
100-250 Bar

10
Piston
40-300 Bar

2.

Electrical Load

4
12V / 100mA
Gold plated

5
250 Vac / 5A
48 Vdc / 4A

3.

Electrical Condition

S
SPDT
Contact

4.

Housing Material

B
Brass

Z
Galvanized
Steel

I
Stainless
Steel 303

W
Stainless
Steel 316

5.

Seals

H
HNBR

E
EPDM

S
MVQ
(silicone)

V
FKM

I
Diaphragm
Inox

6.

Threads (X1)

00
1/8"BSPT
L1 10 mm

01
1/4"BSPT
L1 12 mm

10
1/8"BSPP
L1 10 mm

11
1/4"BSPP
L1 12 mm

20
M10x1
L1 10 mm

21
M10x1K
L1 10 mm

23
M12x1.5
L1 12 mm

40
1/8"- 27NPT
L1 10 mm

41
1/4" - 18NPT
L1 12 mm

7.

Customizations

* See the attachment caps and connectors

DIN Connector EN 175301-803-A
(DIN43650/A) - IP65

.E0

LED DIN Connector EN 175301-803-A
(DIN43650/A) - IP65

.L0

.XX
Costumized
product

8.

Adjustments (bar)

S
Rising
Setup

D
Falling
Setup

1.	2.	3.	4.	5.	6.	7.	8.
----	----	----	----	----	----	----	----