


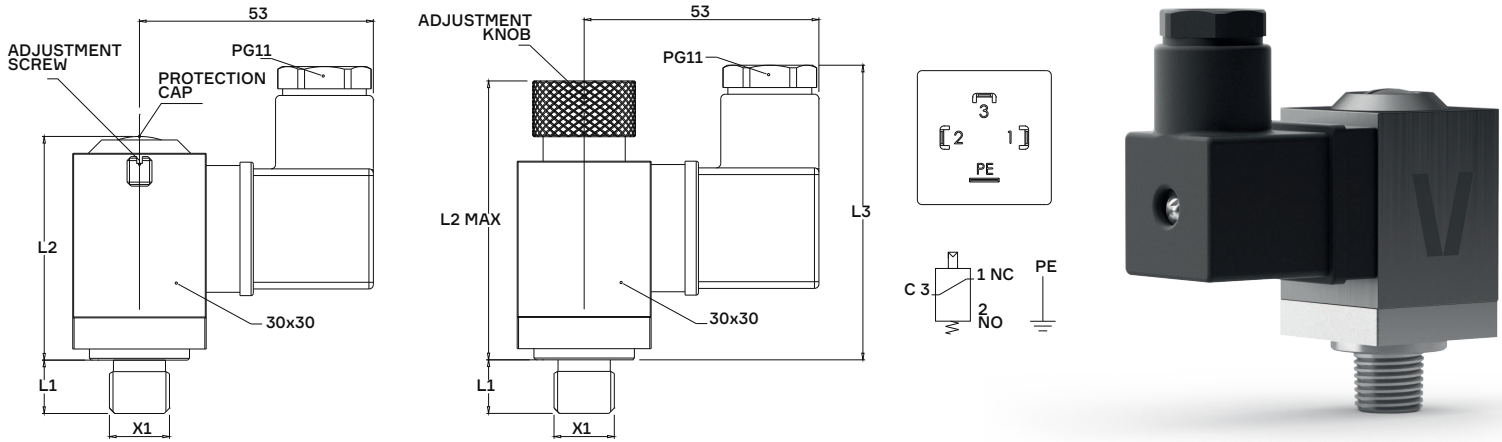

Overpressure limit	Brass - Diaphragm Steel - Piston	300 bar 600 bar	Max Hysteresis	Piston version Diaphragm version	15% of full scale value 10% of full scale value	L2 Dimension	Piston version 55 mm Diaphragm version 51 mm
Working pressure	Brass - Diaphragm Steel - Piston	180 bar 450 bar	Standard protection level	.E0 DIN Connector EN 175301-803-A (DIN43650/A) - IP65 * See the attachment caps and connectors		MAX L2 Dimension	Piston version 69 mm Diaphragm version 65 mm
Operating temperature	* See the guide to selection of diaphragms / seals					Dimension L3	Piston version 70 mm Diaphragm version 66 mm

Select specifications for product coding

1.	Setting Range	01 Diaphragm 0.3-1 Bar	02 Diaphragm 0.5-2 Bar	03 Diaphragm 1.5-10 Bar	04 Diaphragm 9-20 Bar	05 Diaphragm 15-50 Bar	06 Diaphragm 40-80 Bar	07 Diaphragm 50-100 Bar	08 Piston 40-150 Bar	09 Piston 100-250 Bar	10 Piston 120-300 Bar
2.	Electrical Load									4 12V / 100mA Gold plated	5 250 Vac / 5A 48 Vdc / 4A
3.	Type of Regulation	S SPDT Contact									
4.	Adjustment option									V Screw	P Knob
5.	Seals					H HNBR		E EPDM	S MVQ (silicone)	V FKM	
6.	Threads (X1)					00 1/8"BSPT L1 10 mm	01 1/4"BSPT L1 12 mm	10 1/8"BSPP L1 10 mm	11 1/4"BSPP L1 12 mm		
7.	Customizations * See the attachment caps and connectors									.E0 DIN Connector EN 175301-803-A (DIN43650/A) - IP65	.XX Costumized product
8.	Adjustments (bar)									S Rising Setup	D Falling Setup

1.	2.	3.	4.	5.	6.	7.	8.
----	----	----	----	----	----	----	----