


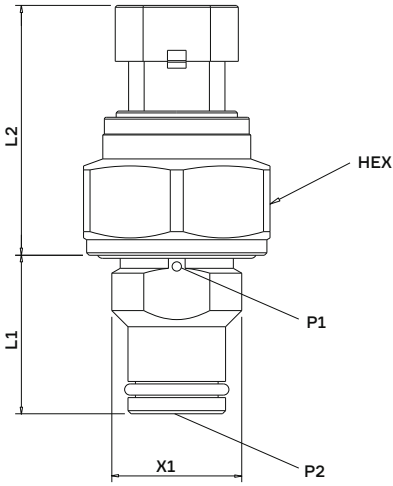

CONFIGURATION
NORMALLY OPEN

A (P1-P2) ≥ ΔP
B (P2-P1) ≥ ΔP

CONFIGURATION
NORMALLY CLOSED

A (P1-P2) ≥ ΔP
B (P2-P1) ≥ ΔP



Overpressure limit	600 bar	Fluid Type	Oil	Standard protection level	AMP Superseal Connection - 1.5 2 vie-IP67 * See the attachment caps and connectors	
Working pressure	450 bar	Operating temperature	-30°C + 140°C	L2 Dimension:	Config / .S0	45 mm
		Drive Type	Magnetic		Config / .D0	50 mm
					Config / .J0	45 mm

Select specifications for product coding

↓

1.

Working Logic

A (P1-P2)B (P2-P1)

↓

2.

Threads (X1)
* L1 Value customizable

091/2" BSPPL1 25,5 mm35M20X1,5L1 25,5 mm

↓

3.

Electrical Load

412V / 100 mAGold Plated548Vdc / 4A

↓

4.

Electrical Condition

ANormally OpenCNormally Closed

↓

5.

Housing Material

AluminumBrass

↓

6.

Seals

NBRFKM

↓

7.

Customizations
* See the attachment caps and connectors

.SAMP Superseal Connection1.5 2 vie -IP67.DDeutsch ConnectionDT04- 2P - IP67.JAMP Junior Power ConnectionTime - IP65.XXCustomized product

↓

8.

Adjustments (bar)
* tolerance

1,3±15%2±10%2,5±10%3±10%5±10%8±10%

PE3

1.

2.

3.

4.

5.

6.

7.

8.