

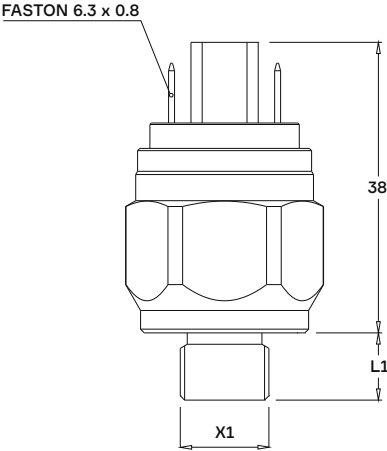


CONFIGURATION
NORMALLY CLOSED



CONFIGURATION
NORMALLY OPEN



Overpressure limit	Brass - Diaphragm	15 bar	Operating temperature	* See the guide to selection of diaphragms / seals		Standard protection level	.F0 Faston Connection - IP00 * See the attachment caps and connectors	
	Steel - Diaphragm	15 bar						
Working pressure	Brass - Diaphragm	10 bar	Max Hysteresis	Diaphragm conf. 10% of full scale value				
	Steel - Diaphragm	10 bar						

Select specifications for product coding

1.	Setting Range					01		02	
						Diaphragm -100 : -500		Diaphragm -500 : -900	
2.	Electrical Load					4		5	
						12V / 50mA Gold plated		48V / 0,5 A	
3.	Electrical Condition					A		C	
						Normally Open		Normally Closed	
4.	Housing Material					B	Z	I	W
						Brass	Galvanized Steel	Stainless Steel 303	Stainless Steel 316
5.	Seals					H	E	S	V
						HNBR	EPDM	MVQ (silicone)	FKM
6.	Threads (X1)					I		I	
						Stainless Steel Diaphragm			
7.	Customizations	00	01	10	11	20	21	23	40
		1/8"BSPT L1 10 mm	1/4"BSPT L1 12 mm	1/8"BSPP L1 10 mm	1/4"BSPP L1 12 mm	M10x1 L1 10 mm	M10x1K L1 10 mm	M12x1.5 L1 12 mm	1/8"- 27NPT L1 10 mm
8.	Adjustments (bar)					.F0		.01	.02
						Faston connection IP00		Protection Cap KT011 - IP54	Protection Cap KT012 - IP65
								.XX	
								Costumized product	
								S	D
								Rising Setup	Falling Setup

1.	2.	3.	4.	5.	6.	7.	8.
----	----	----	----	----	----	----	----