


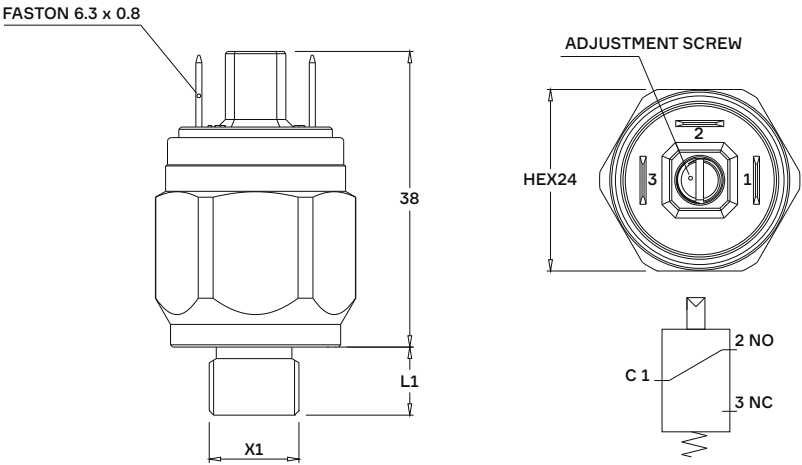

Overpressure limit	Brass - Diaphragm	15 bar	Operating temperature	* See the guide to selection of diaphragms / seals		Standard protection level	.F0 Faston Connection - IP00 * See the attachment caps and connectors	
	Steel - Diaphragm	15 bar						
Working pressure	Brass - Diaphragm	10 bar	Max Hysteresis	Diaphragm conf.	10% of full scale value			
	Steel - Diaphragm	10 bar						

Select specifications for product coding

1.	Setting Range	01		02					
		Diaphragm -100 :-500		Diaphragm -500 :-900					
2.	Electrical Load	4		5					
		12V / 100mA Gold plated		250Vac / 5A 48Vdc / 4A					
3.	Electrical Condition	S		A		C			
		SPDT Contact		Normally Open		Normally Closed			
4.	Housing Material	B		Z		I		W	
		Brass		Galvanized Steel		Stainless Steel 303		Stainless Steel 316	
5.	Seals	H		E		S		V	
		HNBR		EPDM		MVQ (silicone)		FKM	
6.	Threads (X1)	00		01		10		11	
		1/8"BSPT L1 10 mm		1/4"BSPT L1 12 mm		1/8"BSPP L1 10 mm		1/4"BSPP L1 12 mm	
7.	Customizations	20		21		23		40	
		M10x1 L1 10 mm		M10x1K L1 10 mm		M12x1.5 L1 12 mm		1/8" - 27NPT L1 10 mm	
8.	Adjustments (bar)	.F0		.01		.02		.97	
		Faston Connection - IP00		ProtectionCap KT011 - IP54		Protection Cap KT012 - IP65		Conn. AMP Superseal 1.5 2 ways - IP67	
		.99		.XX					
		Conn. Metri-Pack (MP280) - IP67		Costumized product					
		S		D					
		Rising Setup		Falling Setup					

1.	2.	3.	4.	5.	6.	7.	8.
----	----	----	----	----	----	----	----