VR9

VACUUM SWITCH
INTEGRATED CONNECTOR
≤ 250 V

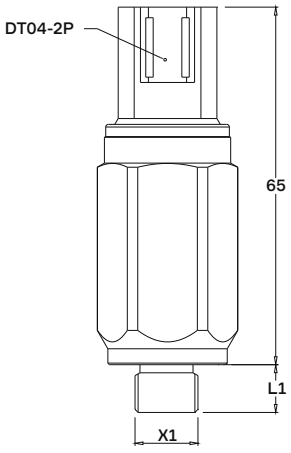

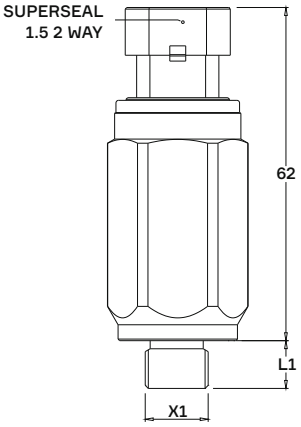

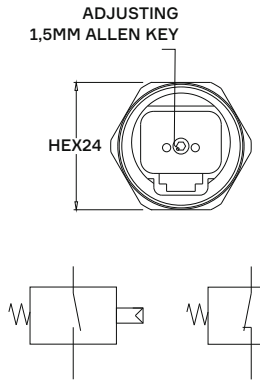



Overpressure limit	Brass - Diaphragm Steel - Diaphragm	15 bar 15 bar	**Operating temperature**	* See the guide to selection of diaphragms / seals	
Working pressure	Brass - Diaphragm Steel - Diaphragm	10 bar 10 bar	**Max Hysteresis**	Diaphragm conf.	10% of full scale value

Standard protection level IP67
* See the attachment caps and connectors

Select specifications for product coding

1. Setting Range

01	02
Diaphragm -100 :-500	Diaphragm -500 : -900

2. Electrical Load

4	5
12V / 100mA Gold plated	250Vac / 5A 48Vdc / 4A

3. Electrical Condition

A	C
Normally Open	Normally Closed

4. Housing Material

B	Z	I	W
Brass	Galvanized Steel	Stainless Steel 303	Stainless Steel 316

5. Seals

H	E	S	V	I
HNBR	EPDM	MVQ (silicone)	FKM	Stainless Steel Diaphragm

6. Threads (X1)

00	01	10	11	20	21	23	40	41
1/8"BSPT *L1 10 mm*	1/4"BSPT *L1 12 mm*	1/8"BSPP *L1 10 mm*	1/4"BSPP *L1 12 mm*	M10x1 *L1 10 mm*	M10x1K *L1 10 mm*	M12x1.5 *L1 12 mm*	1/8"- 27NPT *L1 10 mm*	1/4" - 18NPT *L1 12 mm*

7. Customizations

* See the attachment caps and connectors

.S0	.D0	.XX
Conn. AMP Superseal 1.5 2 way - IP67	Conn. Deutsch DT04 2P - IP67	Costumized product

8. Adjustable (bar)

S	D
Rising Setup	Falling Setup

VR9	1.	2.	3.	4.	5.	6.	7.	8.

Release 01