


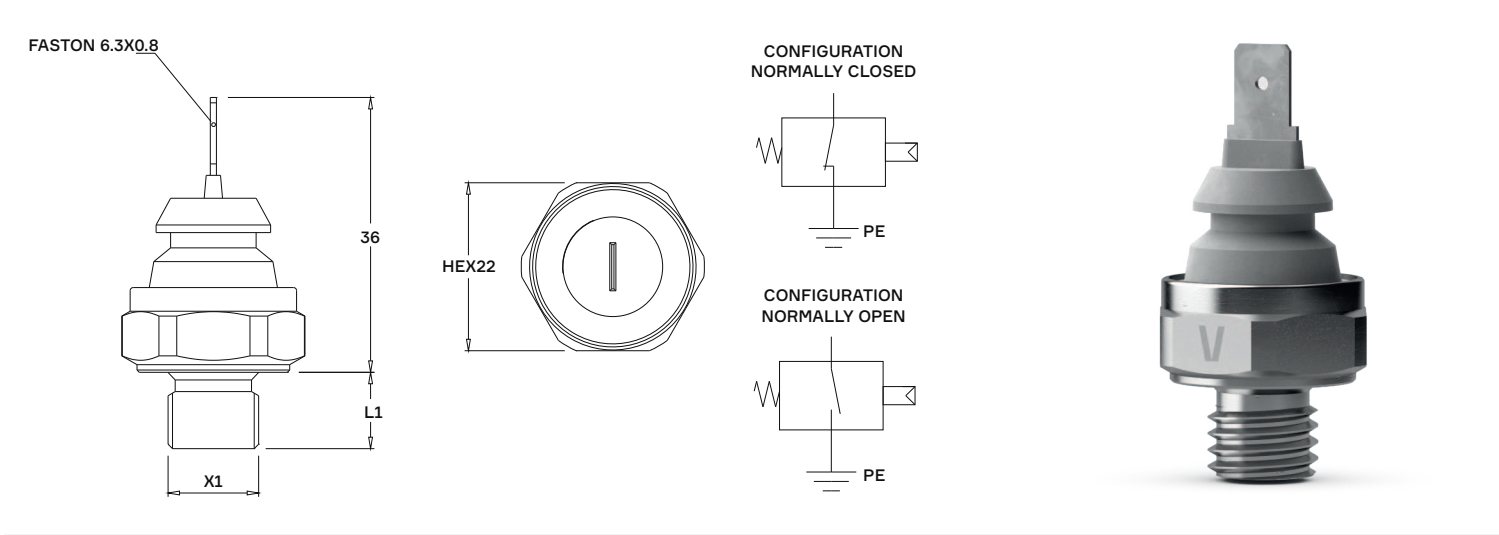

Overpressure limit	Brass - Diaphragm	20 bar	Operating temperature	* See the guide to selection of diaphragms / seals		Standard protection level	.F0 Faston Connection - IP00 * See the attachment caps and connectors	
	Steel - Diaphragm	20 bar						
Working pressure	Brass - Diaphragm	10 bar	Max Hysteresis	Diaphragm version	10% of full scale value			
	Steel - Diaphragm	10 bar						

Select specifications for product coding

↓

1.

2.

3.

4.

5.

6.

7.

↓

Setting Range

Electrical Load

Electrical Condition

Housing Material

Seals

Threads (X1)

Customizations
* See the attachment caps and connectors

01

Diaphragm
0.2-0.5 Bar

02

Diaphragm
0.5-2 Bar

03

Diaphragm
2-4 Bar

04

Diaphragm
3-6 Bar

05

Diaphragm
5-8 Bar

5

48V / 0,5A

A

Normally Open

C

Normally Closed

B

Brass

Z

Galvanized Steel

N

NBR

20

M10x1
L1 10 mm

21

M10x1K
L1 10 mm

23

M12x1.5
L1 12 mm

23A

M12x1.75
L1 12 mm

.F0

Faston Connection - IP00

.XX

Costumized product

PR3E

1.	2.	3.	4.	5.	6.	7.
----	----	----	----	----	----	----