PR6

PRESSURE SWITCH
SPST - CLAMPS
≤ 48 V

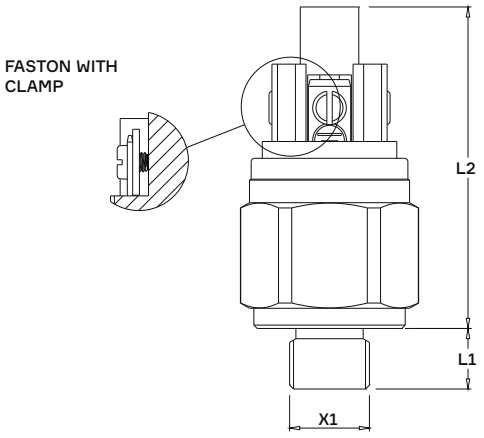



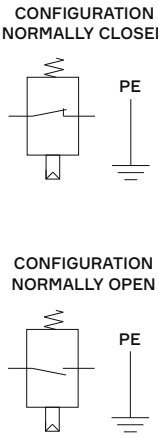

Overpressure limit	Brass - Diaphragm	80 bar	**Operating temperature**	See the guide to selection of diaphragms / seals	**Standard protection level**	.M0 Clamp Connection - IP00 ** See the attachment caps and connectors*
	Steel - Diaphragm	300 bar				
	Steel - Piston	600 bar				
Working pressure	Brass - Diaphragm	40 bar	**Max Hysteresis**	Piston version 15% of full scale value Diaphragm version 10% of full scale value	**L2 Dimension**	Piston version 51 mm Diaphragm version 48 mm
	Steel - Diaphragm	180 bar				
	Steel - Piston	450 bar				

Select specifications for product coding

1. Setting Range

01	02	03	04	05	06	07	08	09	10
Diaphragm 0.1-1 Bar	Diaphragm 0.2-2 Bar	Diaphragm 1.5-10 Bar	Diaphragm 9-20 Bar	Diaphragm 15-50 Bar	Diaphragm 40-80 Bar	Diaphragm 50-100 Bar	Piston 50-150 Bar	Piston 100-250 Bar	Piston 40-300 Bar

2. Electrical Load

4	5
12V / 100mA Gold plated	48V / 0,5 A

3. Electrical Condition

A	C
Normally Open	Normally Closed

4. Housing Material

B	Z	I	W
Brass	Galvanized Steel	Stainless Steel 303	Stainless Steel 316

5. Seals

H	E	S	V	I
HNBR	EPDM	MVQ (silicone)	FKM	Stainless Steel Diaphragm

6. Threads (X1)

00	01	10	11	20	21	23	40	41
1/8"BSPT *L1 10 mm*	1/4"BSPT *L1 12 mm*	1/8"BSPP *L1 10 mm*	1/4"BSPP *L1 12 mm*	M10x1 *L1 10 mm*	M10x1K *L1 10 mm*	M12x1.5 *L1 12 mm*	1/8"- 27NPT *L1 10 mm*	1/4" - 18NPT *L1 12 mm*

7. Customizations
* See the attachment caps and connectors

.M0	.01	.02	.XX
Clamp Connection IP00	Protection Cap KT011 - IP54	Protection Cap KT012 - IP65	Costumized product

8. Adjustments (bar)

S	D
Rising Setup	Falling Setup

PR6	1.	2.	3.	4.	5.	6.	7.	8.