

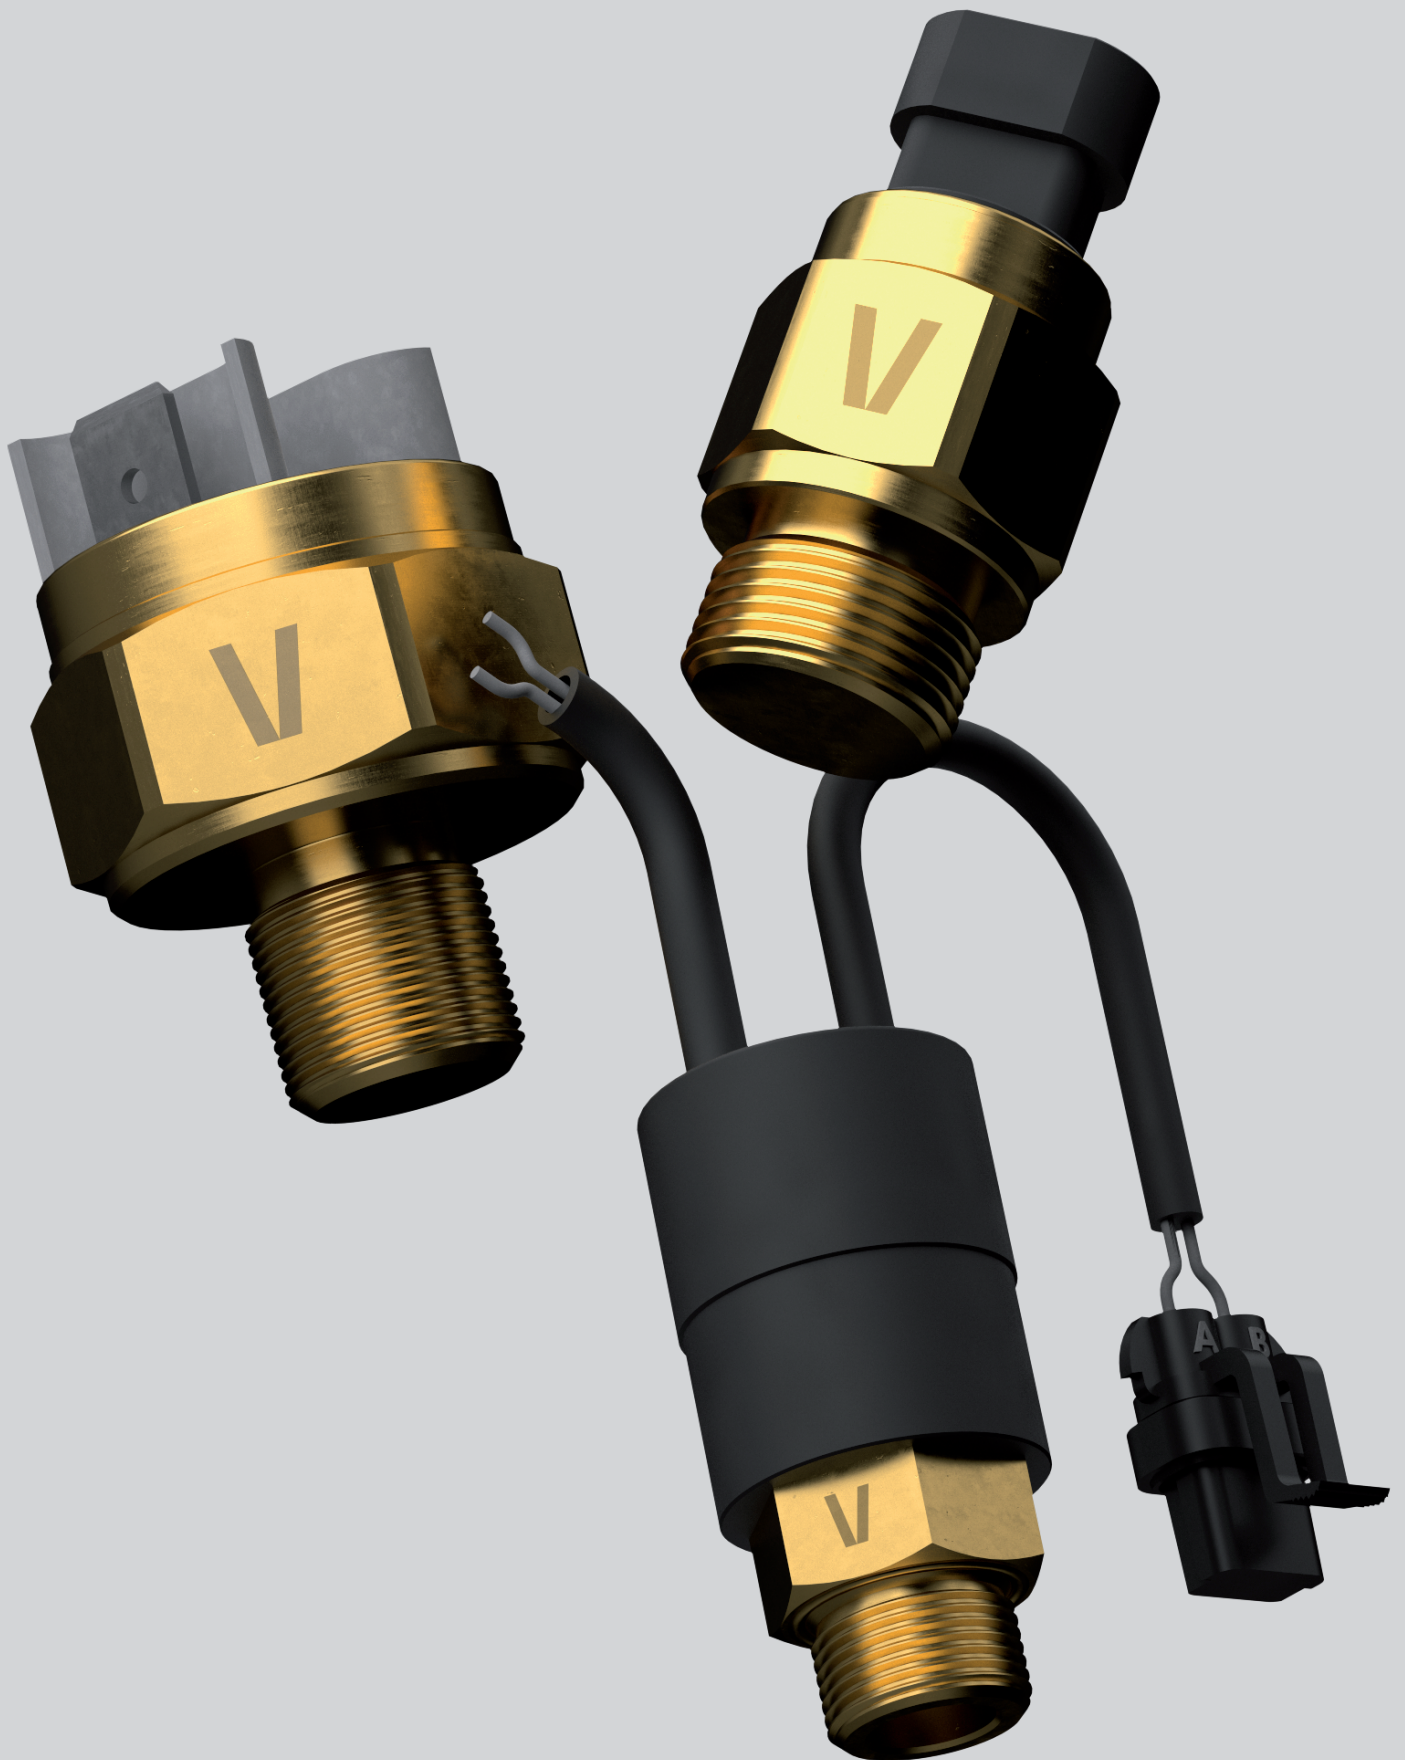


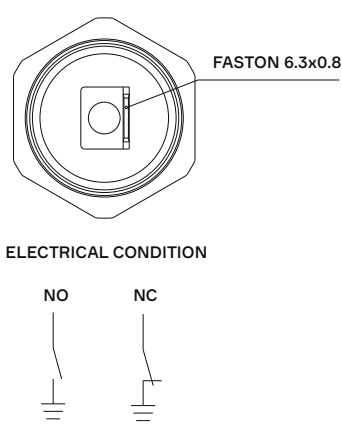

TEMPERATURE
SENSOR

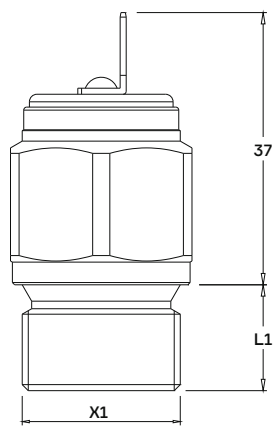


Max Pressure	250 bar	Intervention Tolerance	± 3,5	Tightening Torque	25 Nm
Electrical Load Type	48V / 4A 24V / 6A	Thermal Hysteresis	< 14 °C	Housing Material	Brass Hex 24mm
Fluid Temperature	-40 ÷ +150 °C			Standard Protection Level	.F0 Faston Connection - IP00 * See the attachment caps and connectors

Select specifications for product coding

1.	Threads (X1)								09 1/2" BSPP L1 13,5 mm	12 3/8" BSPP L1 13,5 mm	25 M22x 1,5 L1 13,5 mm
2.	Switching Temperature	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C	100 100° C	110 110° C	120 120° C
3.	Electrical Condition									A Normally Open	C Normally Closed
4.	Switching									S Rising Setup	D Falling Setup
5.	Customizations * See the attachment caps and connectors								.F0 Faston Connection IP00	.01 Protection Cap KT011 - IP54	.XX Costumized product

1.	2.	3.	4.	5.
----	----	----	----	----


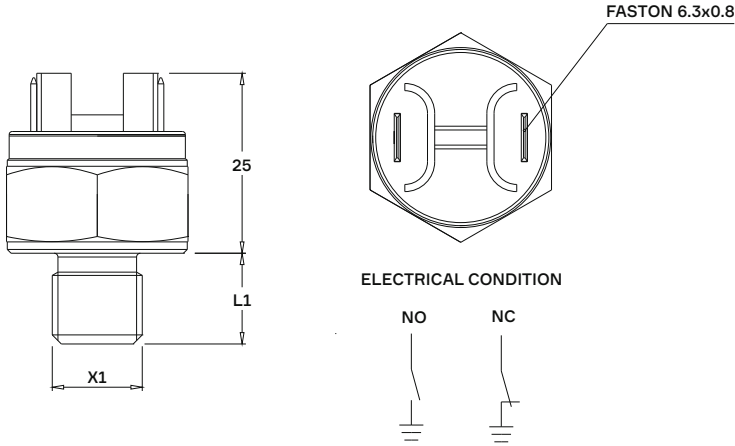


Max Pressure	250 bar	Intervention Tolerance	± 3,5	Tightening Torque	25 Nm
Electrical Load Type	48V / 4A 24V / 6A	Thermal Hysteresis	< 14 °C	Housing Material	Brass Hex 24mm
Fluid Temperature	-40 ÷ +150 °C			Standard Protection Level	.F0 Faston Connection - IP00 * See the attachment caps and connectors


Select specifications for product coding

1.	Threads (X1)								09 1/2" BSPP L1 13,5 mm	12 3/8" BSPP L1 13,5 mm	25 M22x 1,5 L1 13,5 mm
2.	Switching Temperature	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C	100 100° C	110 110° C	120 120° C
3.	Electrical Condition									A Normally Open	C Normally Closed
4.	Switching									S Rising Setup	D Falling Setup
5.	Customizations * See the attachment caps and connectors		.F0 Faston Connection IP00	.01 Protection Cap KT011 - IP54		.97 Cable L. 250mm Conn. AMP Superseal 1.5 2 vie -IP67		.98 Cable L. 250 mm Conn. Deutsch DT04-2P - IP67		.99 Cable L. 250 mm Conn. Metri-Pack (MP280) - IP67	.XX Costumized product

1.	2.	3.	4.	5.	6.	7.
----	----	----	----	----	----	----

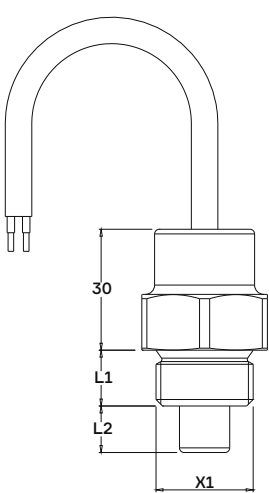


ELECTRICAL CONDITION



Max Pressure	250 bar	Intervention Tolerance	± 3,5	Tightening Torque	25 Nm
Electrical Load Type	48V / 1A 24V / 2A 250Vac / 1A	Thermal Hysteresis	< 5 °C	Housing Material	Brass Hex 24mm
Fluid Temperature	-40 ÷ +150 °C			Standard Protection Level	.96 Cable 2 x 0,75 - IP67 * See the attachment caps and connectors

Select specifications for product coding

↓	Select specifications for product coding												
	1.	Threads (X1)								09	12	25	
										1/2" BSPP L1 13,5 mm	3/8" BSPP L1 13,5 mm	M22x 1,5 L1 13,5 mm	
	2.	Switching Temperature	030	040	050	060	070	080	090	100	110	120	
			30° C	40° C	50° C	60° C	70° C	80° C	90° C	100° C	110° C	120° C	
	3.	Electrical Condition								A	C		
										Normally Open	Normally Closed		
4.	Switching								S	D			
									Rising Setup	Falling Setup			
5.	Probe Lenght (L2)								1	2			
									Probe 15 mm	Probe 25,4 mm			
6.	Cable Type								F	C			
									Flying Leads	Cable 2 x 0,75			
7.	Customizations								.96	.97	.98	.99	.XX
		* See the attachment caps and connectors							Cable 2 x 0,75 L. 250 mm - IP67	Cable L. 250mm Conn. AMP Superseal 1.5 2 vie -IP67	Cable L. 250 mm Conn. Deutsch DT04-2P - IP67	Cable L. 250 mm Conn. Metri-Pack (MP280) - IP67	Costumized product

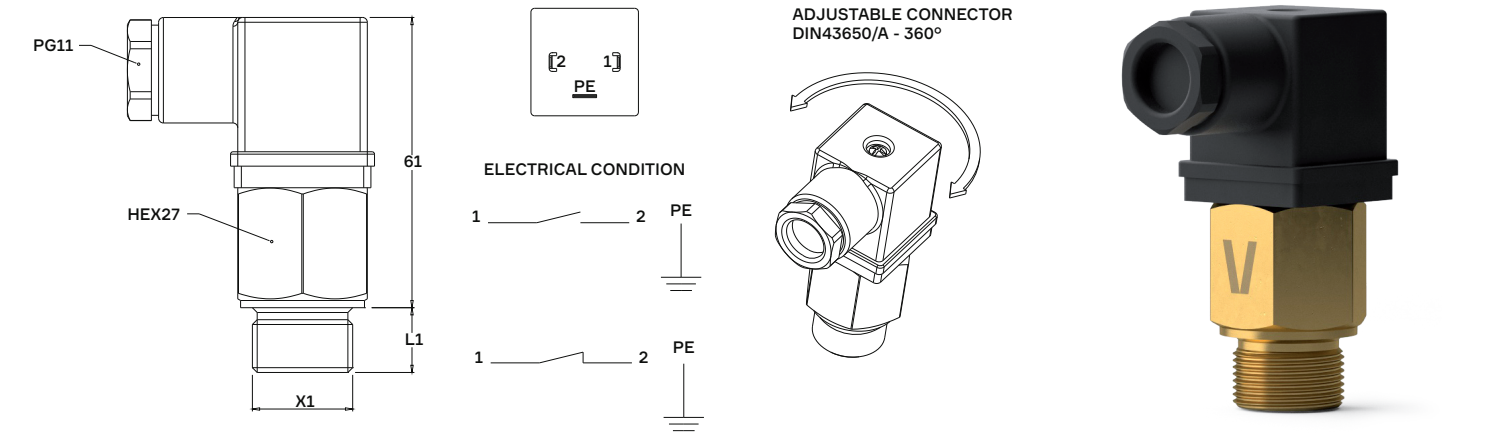



Max Pressure	250 bar	Intervention Tolerance	± 3,5	Tightening Torque	25 Nm
Electrical Load Type	48V / 4A 24V / 6A 250Vac / 1A	Thermal Hysteresis	< 14 °C	Housing Material	Brass Hex 27 mm
Fluid Temperature	-40 ÷ +150 °C			Standard Protection Level	.E0 DIN EN Connector 175301-803-A (DIN43650/A) - IP65 * See the attachment caps and connectors

Select specifications for product coding


↓

Select specifications for product coding												
1.	Threads								09 1/2" BSPP L1 13,5 mm	12 3/8" BSPP L1 13,5 mm	25 M22x 1,5 L1 13,5 mm	
2.	Switching Temperature	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C	100 100° C	110 110° C	120 120° C	
3.	Electrical Condition								A Normally Open		C Normally Closed	
4.	Switching								S Rising Setup		D Falling Setup	
5.	Customizations								.E0 DIN EN Connector 175301-803-A (DIN43650/A) - IP65		.XX Customized product	

1.	2.	3.	4.	5.
----	----	----	----	----

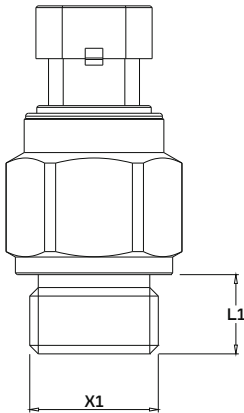

ELECTRICAL CONDITION





Max Pressure	250 bar	Intervention Tolerance	± 3,5	Tightening Torque	25 Nm
Electrical Load Type	48V / 4A 24V / 6A	Thermal Hysteresis	< 14 °C	Housing Material	Brass Hex 24mm
Fluid Temperature	-40 ÷ +150 °C			Standard Protection Level	IP67 * See the attachment caps and connectors

Select specifications for product coding

↓	Select specifications for product coding												
	1.	Threads (X1)							09	12	25		
									1/2" BSPP L1 13,5 mm	3/8" BSPP L1 13,5 mm	M22x 1,5 L1 13,5 mm		
2.	Switching Temperature	030	040	050	060	070	080	090	100	110	120		
		30° C	40° C	50° C	60° C	70° C	80° C	90° C	100° C	110° C	120° C		
3.	Electrical Condition							A			C		
								Normally Open			Normally Closed		
4.	Switching							S			D		
								Rising Setup			Falling Setup		
5.	Customizations							.S0	.D0	.XX			
								Connector AMP Superseal 1.5 2 vie - IP67	Connector Deutsch DT04-2P - IP67	Customized product			

1.	2.	3.	4.	5.
----	----	----	----	----

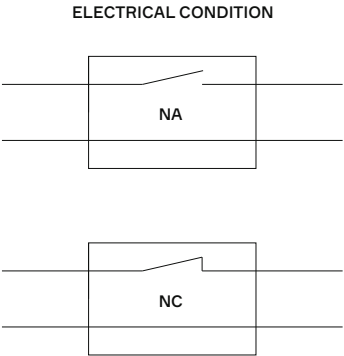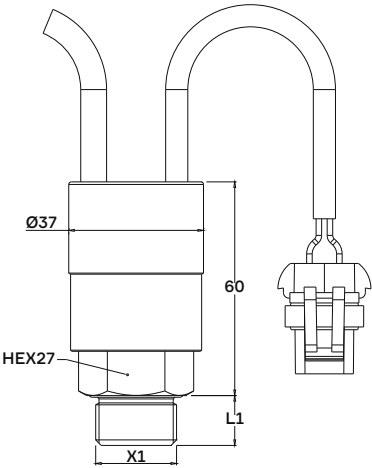


Max Pressure	250 bar	Intervention Tolerance	± 4	Tightening Torque	25 Nm
Electrical Load Date	12V / 30A 24V / 30A	Thermal Hysteresis	< 16 °C	Housing Material	Brass Hex 27mm
Fluid Temperature	-40 ÷ +120 °C			Standard Protection Level	.99 Cable L. 250 mm Metri-Pack Connector (MP280) - IP67 * See the attachment caps and connectors

Select specifications for product coding

1.	Threads (X1)								09 1/2" BSPP L1 13,5 mm	12 3/8" BSPP L1 13,5 mm	25 M22x 1,5 L1 13,5 mm
2.	Switching Temperature	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C	100 100° C	110 110° C	120 120° C
3.	Electrical Condition									A Normally Open	C Normally Closed
4.	Switching									S Rising Setup	D Falling Setup
5.	Electrical Load Type									.12 12V / 30A	.24 24V / 30A
6.	Customizations * See the attachment caps and connectors									.99 Cable L. 250 mm Metri-Pack Connector (MP280) - IP67	.XX Customized Product

1.	2.	3.	4.	5.	6.
----	----	----	----	----	----

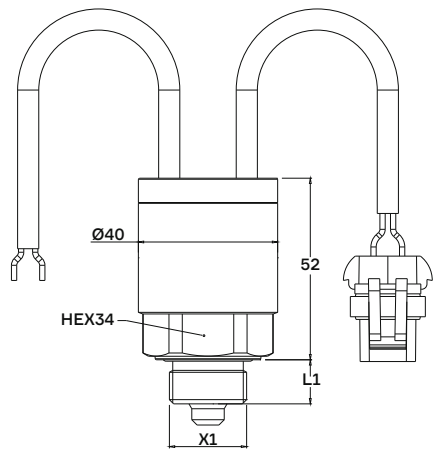


Max Pressure	200 bar	Fluid Temperature	-20 ÷ +80 °C	Housing Material	Brass
Supply Voltage	12÷24 Vdc	Intervention Tolerance	± 3,5	Supply Cable	1,00 m
Max Load	20 A	Tightening Torque	25 Nm	Standard Protection Level	Cable L. 250 mm Metri-Pack Conn. (MP280) - IP67 * See the attachment caps and connectors

Select specifications for product coding

1.	Threads (X1)					09 1/2" BSPP L1 13,5 mm	12 3/8" BSPP L1 13,5 mm	25 M22x 1,5 L1 13,5 mm
2.	Switch-on Temperature (°C)	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C
3.	Switch-off Temperature (°C)	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C
4.	Transition Time (Seconds)					A 15	B 30	C 60
5.	Electrical Condition						A Normally Closed	C Normally Closed
6.	Customization * See the attachment caps and connectors				.97 Cable L. 250mm AMP Superseal Conn. 1.5 2 vie -IP67	.98 Cable L. 250 mm Deutsch Conn. DT04-2P - IP67	.99 Cable L. 250 mm Metri-Pack Conn. (MP280) - IP67	.XX Costumized product

TS1

1.	2.	3.	4.	5.	6.
----	----	----	----	----	----

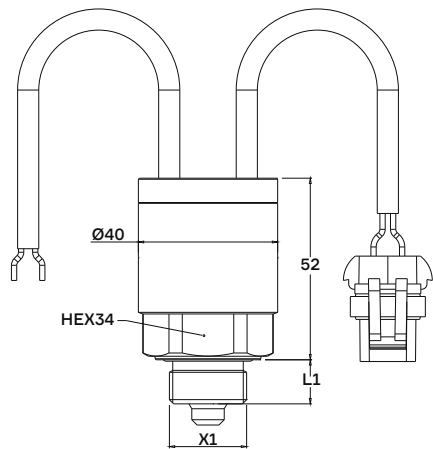

Max Pressure	200 bar	Fluid Temperature	-20 ÷ +80 °C	Housing Material	Brass Hex 34mm
Supply Voltage	12÷24 Vdc	Intervention Tolerance	± 3,5	Supply Cable	1,00 m
Max Load	20 A	Output Signal	PWM	Standard Protection Level	Cable L. 250 mm Metri-Pack Conn. (MP280) - IP67 * See the attachment caps and connectors
		Tightening Torque	25 Nm		

Select specifications for product coding

1.	Threads (X1)					09 1/2" BSPP L1 13,5 mm	12 3/8" BSPP L1 13,5 mm	25 M22x 1,5 L1 13,5 mm
2.	Switch-on Temperature (°C)	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C
3.	100% Output Power Temperature (°C)	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C
4.	Customizations * See the attachment caps and connectors			.97 Cable L. 250mm AMP Superseal Conn. 1.5 2 vie -IP67	.98 Cable L. 250 mm Deutsch Conn. DT04-2P - IP67	.99 Cable L. 250 mm Metri-Pack Conn. (MP280) - IP67	.XX Customized Product	

1.	2.	3.	4.
----	----	----	----