
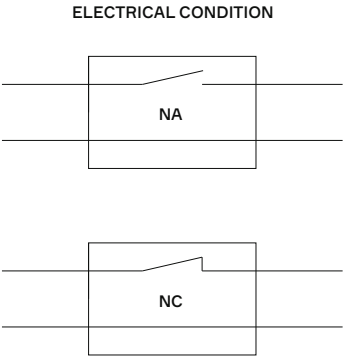


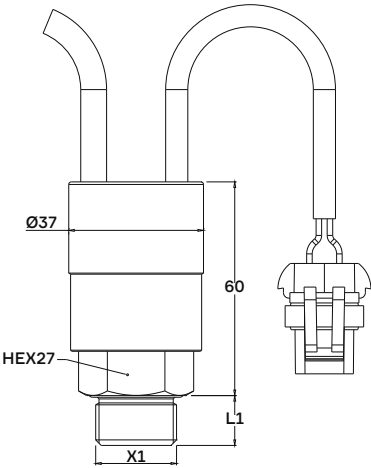

Max Pressure	250 bar	Intervention Tolerance	± 4	Tightening Torque	25 Nm
Electrical Load Date	12V / 30A 24V / 30A	Thermal Hysteresis	< 16 °C	Housing Material	Brass Hex 27mm
Fluid Temperature	-40 ÷ +120 °C			Standard Protection Level	.99 Cable L. 250 mm Metri-Pack Connector (MP280) - IP67 * See the attachment caps and connectors

Select specifications for product coding

1.	Threads (X1)								09 1/2" BSPP L1 13,5 mm	12 3/8" BSPP L1 13,5 mm	25 M22x 1,5 L1 13,5 mm
2.	Switching Temperature	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C	100 100° C	110 110° C	120 120° C
3.	Electrical Condition									A Normally Open	C Normally Closed
4.	Switching									S Rising Setup	D Falling Setup
5.	Electrical Load Type									.12 12V / 30A	.24 24V / 30A
6.	Customizations * See the attachment caps and connectors									.99 Cable L. 250 mm Metri-Pack Connector (MP280) - IP67	.XX Customized Product

1.	2.	3.	4.	5.	6.
----	----	----	----	----	----