


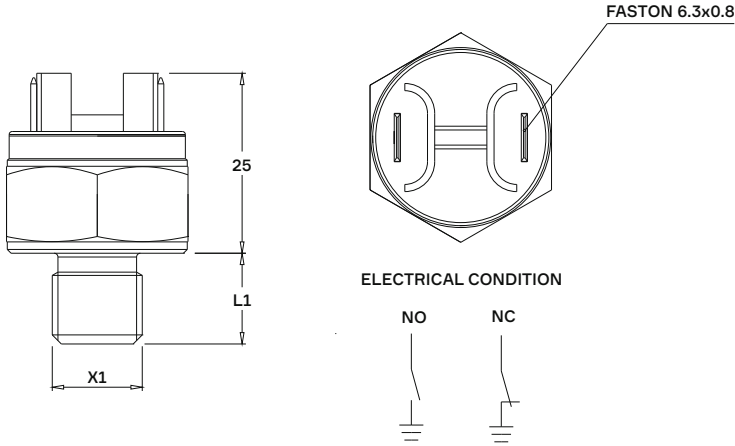

|                      |                      |                        |         |                           |                                                                          |
|----------------------|----------------------|------------------------|---------|---------------------------|--------------------------------------------------------------------------|
| Max Pressure         | 250 bar              | Intervention Tolerance | ± 3,5   | Tightening Torque         | 25 Nm                                                                    |
| Electrical Load Type | 48V / 4A<br>24V / 6A | Thermal Hysteresis     | < 14 °C | Housing Material          | Brass Hex 24mm                                                           |
| Fluid Temperature    | -40 ÷ +150 °C        |                        |         | Standard Protection Level | .F0 Faston Connection - IP00<br>* See the attachment caps and connectors |

Select specifications for product coding

|    |                       |              |              |                                  |                                       |                                                                 |                                                           |                                                              |                               |                               |                              |
|----|-----------------------|--------------|--------------|----------------------------------|---------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------------|-------------------------------|-------------------------------|------------------------------|
| 1. | Threads (X1)          |              |              |                                  |                                       |                                                                 |                                                           |                                                              | 09<br>1/2" BSPP<br>L1 13,5 mm | 12<br>3/8" BSPP<br>L1 13,5 mm | 25<br>M22x 1,5<br>L1 13,5 mm |
| 2. | Switching Temperature | 030<br>30° C | 040<br>40° C | 050<br>50° C                     | 060<br>60° C                          | 070<br>70° C                                                    | 080<br>80° C                                              | 090<br>90° C                                                 | 100<br>100° C                 | 110<br>110° C                 | 120<br>120° C                |
| 3. | Electrical Condition  |              |              |                                  |                                       |                                                                 |                                                           |                                                              |                               | A<br>Normally Open            | C<br>Normally Closed         |
| 4. | Switching             |              |              |                                  |                                       |                                                                 |                                                           |                                                              |                               | S<br>Rising Setup             | D<br>Falling Setup           |
| 5. | Customizations        |              |              | .F0<br>Faston Connection<br>IP00 | .01<br>Protection Cap<br>KT011 - IP54 | .97<br>Cable L. 250mm<br>Conn. AMP Superseal<br>1.5 2 vie -IP67 | .98<br>Cable L. 250 mm<br>Conn. Deutsch<br>DT04-2P - IP67 | .99<br>Cable L. 250 mm<br>Conn. Metri-Pack<br>(MP280) - IP67 | .XX<br>Costumized product     |                               |                              |

|    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|
| 1. | 2. | 3. | 4. | 5. | 6. | 7. |
|----|----|----|----|----|----|----|