TF3

BIMETAL THERMOSTAT
WIRED : SPST

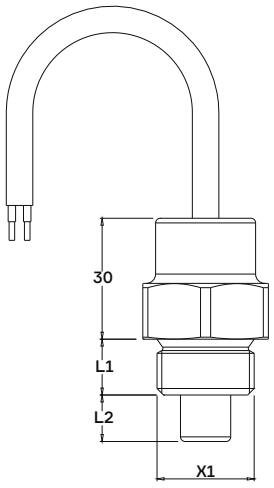



ELECTRICAL CONDITION



Max Pressure	250 bar	Intervention Tolerance	± 3,5	Tightening Torque	25 Nm
Electrical Load Type	48V / 1A 24V / 2A 250Vac / 1A	Thermal Hysteresis	< 5 °C	Housing Material	Brass Hex 24mm
Fluid Temperature	-40 ÷ +150 °C			Standard Protection Level	.96 Cable 2 x 0,75 - IP67 * See the attachment caps and connectors

Select specifications for product coding

1.	Threads (X1)								09 1/2" BSPP *L1 13,5 mm*	12 3/8" BSPP *L1 13,5 mm*	25 M22x 1,5 *L1 13,5 mm*
2.	Switching Temperature	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C	100 100° C	110 110° C	120 120° C
3.	Electrical Condition									A Normally Open	C Normally Closed
4.	Switching									S Rising Setup	D Falling Setup
5.	Probe Lenght (L2)									1 Probe 15 mm	2 Probe 25,4 mm
6.	Cable Type									F Flying Leads	C Cable 2 x 0,75
7.	Customizations * See the attachment caps and connectors				.96 Cable 2 x 0,75 L. 250 mm - IP67	.97 Cable L. 250mm Conn. AMP Superseal 1.5 2 vie -IP67	.98 Cable L. 250 mm Conn. Deutsch DT04-2P - IP67	.99 Cable L. 250 mm Conn. Metri-Pack (MP280) - IP67	.XX Costumized product		

TF3	1.	2.	3.	4.	5.	6.	7.