TF4

BIMETAL THERMOSTAT
SPST - DIN CONNECTOR

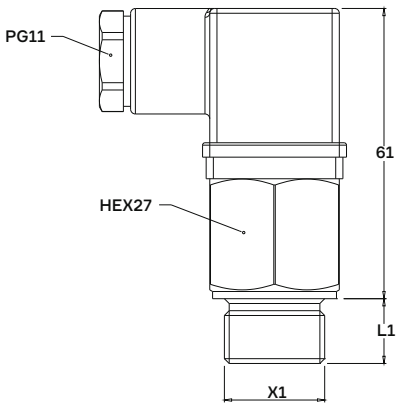

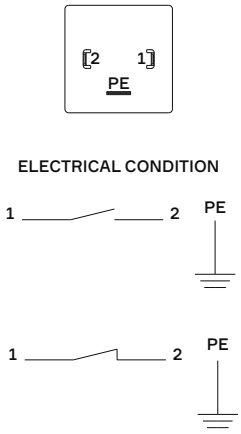

ADJUSTABLE CONNECTOR
DIN43650/A - 360°



Max Pressure	250 bar	Intervention Tolerance	± 3,5	Tightening Torque	25 Nm
Electrical Load Type	48V / 4A 24V / 6A 250Vac / 1A	Thermal Hysteresis	< 14 °C	Housing Material	Brass Hex 27 mm
Fluid Temperature	-40 ÷ +150 °C			Standard Protection Level	.E0 DIN EN Connector 175301-803-A (DIN43650/A) - IP65 * See the attachment caps and connectors

Select specifications for product coding

1. Threads

09	12	25
1/2" BSPP *L1 13,5 mm*	3/8" BSPP *L1 13,5 mm*	M22x 1,5 *L1 13,5 mm*

2. Switching Temperature

030	040	050	060	070	080	090	100	110	120
30° C	40° C	50° C	60° C	70° C	80° C	90° C	100° C	110° C	120° C

3. Electrical Condition

A	C
Normally Open	Normally Closed

4. Switching

S	D
Rising Setup	Falling Setup

5. Customizations

* See the attachment caps and connectors

.E0	.XX
DIN EN Connector 175301-803-A (DIN43650/A) - IP65	Customized product

TF4	1.	2.	3.	4.	5.