


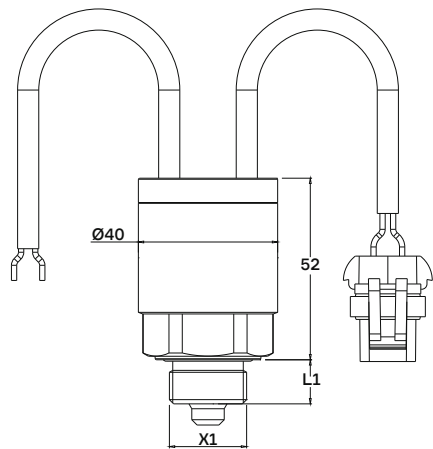

Max Pressure	200 bar	Fluid Temperature	-20 ÷ +80 °C	Housing Material	Brass
Supply Voltage	12÷24 Vdc	Intervention Tolerance	± 3,5	Supply connection	cabl e 1,00 m
Max Load	20 A	Output Signal	PWM	Load connections	See point 6 customization options
		Tightening Torque	25 Nm		

Select specifications for product coding

1.	Threads (X1)					09 1/2" BSPP L1 13,5 mm	12 3/8" BSPP L1 13,5 mm	25 M22x 1,5 L1 13,5 mm
2.	Switch-on Temperature (°C)	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C
3.	100% Output Power Temperature (°C)	030 30° C	040 40° C	050 50° C	060 60° C	070 70° C	080 80° C	090 90° C
4.	Customizations * See the attachment caps and connectrs			.97 Cable L. 250mm AMP Superseal Conn. 1.5 2 vie -IP67	.98 Cable L. 250 mm Deutsch Conn. DT04-2P - IP67	.99 Cable L. 250 mm Metri-Pack Conn. (MP280) - IP67	.XX Customized Product	

INFORMATIONS:
ELECTRONIC THERMOSTAT IDEAL FOR THE PROPORTIONAL CONTROL OF THE ROTATION
OF COOLING FANS ACCORDING TO THE TEMPERATURE DETECTED.

1.	2.	3.	4.
----	----	----	----